












SUPPORT BASE		Page 06-11
SPACER AND GUIDE RAIL CLAMP		Page 12-35
KNOB FOR BRACKET AND HANDLE		Page 36-41
HINGES		Page 42
COMP. FOR CHAINS TABLETOP		Page 43-56
CONVEYOR BUSHINGS AND EXPANSION PLUGS		Page 57-59
COMPONENTS FOR DRIVE AND IDLER ROLLER		Page 60-62
TRANSFER PLATES AND CONVOYER GUIDES		Page 63-79
REDUCERS FOR RACKS		Page 80-81
POLYAMIDE SUPPORTS		Page 82-98
FIXED, ARTICULATED AND ADJUSTABLE FEET (polyamide, nickel and inox)		Page 99-119
THREADED BUSHINGS FOR TUBES Rectangular, Round and Square		Page 120-126

CONVEYOR COMPONENTS

						
D00/DX00 pag. 006	D01/DX01 pag. 006	D02/DX02 pag. 007	D03/DX03 pag. 007	D12/DX12 pag. 008	D08/DX08 pag. 008	D11/DX11 pag. 009
						
D07/DX07 pag. 009	D10/DX10 pag. 010	D35 pag. 010	D36 pag. 011	D13 pag. 012	D14 pag. 012	D79 pag. 013
						
D15 pag. 013	D80 pag. 014	D43 pag. 014	D81 pag. 015	D16/DX16 pag. 015	D18/DX18 pag. 016	D44/DX44 pag. 016
						
D17 pag. 017	D19 pag. 017	D55 pag. 018	D09 pag. 018	D20 pag. 019	D42 pag. 019	D22 pag. 020
						
D21 pag. 020	D66 pag. 021	D23/DX23 pag. 021	D24 pag. 022	D25 pag. 022	D56 pag. 022	D89 pag. 023
						
D29 pag. 023	D30 pag. 024	D31 pag. 024	D32 pag. 025	T46 pag. 025	T47 pag. 026	D91 pag. 026
						
T48 pag. 027	T49 pag. 027	D90 pag. 028	D04 pag. 028	D05 pag. 029	T01 pag. 029	T16 pag. 030
						
T02 pag. 030	T06 pag. 031	T38 pag. 031	T24 pag. 032	D37 pag. 032	D39 pag. 033	D40 pag. 033
						
D41 pag. 034	D97 pag. 035	T12 pag. 035	D26 pag. 036	D27 pag. 036	D28 pag. 036	D46 pag. 037
						
D47 pag. 037	D48 pag. 037	T13 pag. 038	T14 pag. 038	T15 pag. 038	T34 pag. 039	T37 pag. 039
						
T38 pag. 039	T03 pag. 040	T04 pag. 040	T05 pag. 040	T50 pag. 041	T32 pag. 041	D94 pag. 041



						
D33 pag. 042	D34 pag. 042	D68 pag. 043	D69 pag. 043	T11 pag. 044	D85 pag. 044	T10 pag. 045
						
D88 pag. 046	D50 pag. 047	D51 pag. 047	D52 pag. 048	D96 pag. 048	D53 pag. 049	D70 pag. 049
						
D71 pag. 050	D3 pag. 050	D74 pag. 051	D87 pag. 051	D86 pag. 052	D75 pag. 052	D72 pag. 053
						
D67 pag. 053	D49 pag. 054	D45 pag. 054	D93 pag. 055	D76 pag. 055	D54 pag. 056	D82 pag. 056
						
T36 pag. 057	T35 pag. 057	D83 pag. 058	T33 pag. 059	T00 pag. 060	D65 pag. 060	D63 pag. 061
						
T17 pag. 061	D64 pag. 062	D57 pag. 063	D58 pag. 063	D59 pag. 063	D60 pag. 064	D61 pag. 064
						
D62 pag. 064	T06 pag. 065	T07 pag. 065	T08 pag. 066	T19 pag. 066	T25 pag. 067	T26 pag. 067
						
T27 pag. 068	T28 pag. 068	T55 pag. 069	T56 pag. 069	T57 pag. 070	T58 pag. 070	T20,21,22,23 pag. 071
						
T40 pag. 071	T41 pag. 072	T42 pag. 072	T43 pag. 073	T29 pag. 073	T53 pag. 073	T54 pag. 074
						
T18 pag. 074	T39 pag. 075	T44 pag. 075	T45 pag. 076	T30/TX30 pag. 076	T59 pag. 077	T60 pag. 078
						
T52 pag. 079	T31 pag. 080	D99 pag. 081				

Support base (tripode) Type: D00 e DX00

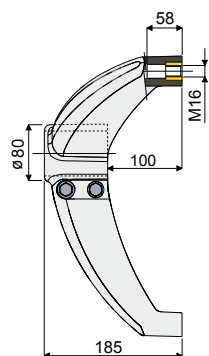

Df		Zinc plated		Stainless steel AISI 304		Tube unthreading load	Max static load allowed
Bore for tubes of		bolts and nuts		bolts and nuts			
(mm)	(Inches)	Type	Code	Type	Code	(N)	(N)
60,3	2"	D00A	CP000001	DX00A	CP000006	9600	15800
50,8	-	D00B	CP000002	DX00B	CP000007		
48,3	1"1/2	D00C	CP000003	DX00C	CP000008		
42,4	1"1/4	D00D	CP000004	DX00D	CP000009		
45x45	tubo quadro	D00E	CP000005	DX00E	CP000010		

Support base (bipode at 120°) Type: D01 e DX01

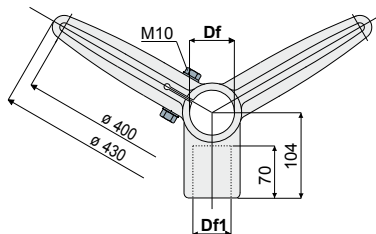

Df		Df1		Zinc plated		Stainless steel AISI 304		Tube unthreading load	Max static load allowed
Bore for tubes of		Bore for tubes of		bolts and nuts		bolts and nuts			
(mm)	(Inches)	(mm)	(Inches)	Type	Code	Type	Code	(N)	(N)
60,3	2"	48,3	1"1/2	D01A	CP000011	DX01A	CP000018	9600	15800
60,3	2"	42,4	1"1/4	D01B	CP000012	DX01B	CP000019		
50,8	-	48,3	-	D01C	CP000013	DX01C	CP000020		
50,8	-	42,4	-	D01D	CP000014	DX01D	CP000021		
48,3	1"1/2	48,3	1"1/2	D01E	CP000015	DX01E	CP000022		
48,3	1"1/2	42,4	1"1/4	D01F	CP000016	DX01F	CP000023		
42,4	1"1/4	42,4	1"1/4	D01G	CP000017	DX01G	CP000024		

MATERIALS: Base made of reinforced polyamide black colour; threaded bushing made of brass; fixing bolts and nuts made of stainless steel AISI 304 or zinc plated steel.


FEATURES: Max tightening torque 3,6 Kg.m.

BOX QUANTITY: 8 pieces.

ON REQUEST:


- Bases: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.
- Assembling of: Bolts and nuts.

Support base (bipode at 180°) Type: D02 e DX02

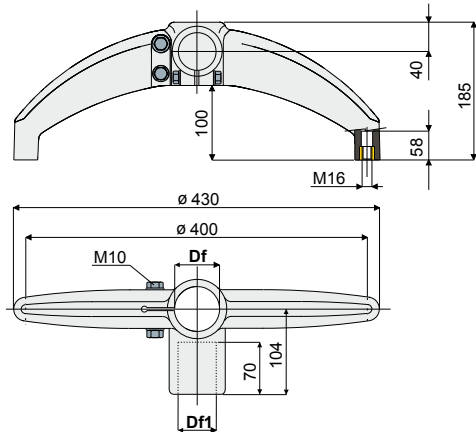

Df Bore for tubes of		Df1 Bore for tubes of		Zinc plated bolts and nuts		Stainless steel AISI 304 bolts and nuts		Tube unthreading load	Max static load allowed
(mm)	(Inches)	(mm)	(Inches)	Type	Code	Type	Code	(N)	(N)
60,3	2"	48,3	1"1/2	D02A	CP000025	DX02A	CP000032	9600	15800
60,3	2"	42,4	1"1/4	D02B	CP000026	DX02B	CP000033		
50,8	-	48,3	-	D02C	CP000027	DX02C	CP000034		
50,8	-	42,4	-	D02D	CP000028	DX02D	CP000035		
48,3	1"1/2	48,3	1"1/2	D02E	CP000029	DX02E	CP000036		
48,3	1"1/2	42,4	1"1/4	D02F	CP000030	DX02F	CP000037		
42,4	1"1/4	42,4	1"1/4	D02G	CP000031	DX02G	CP000038		

Support base (bipode at 180°) Type: D03 e DX03

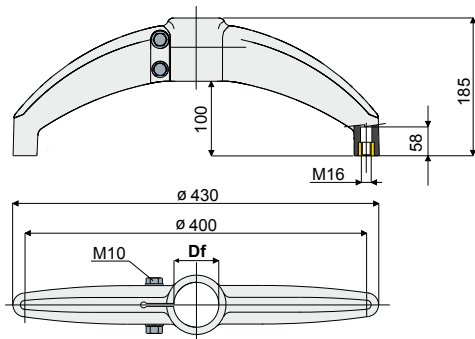

Df Bore for tubes of		Zinc plated bolts and nuts		Stainless steel AISI 304 bolts and nuts		Tube unthreading load	Max static load allowed
(mm)	(Inches)	Type	Code	Type	Code	(N)	(N)
60,3	2"	D03A	CP000039	DX03A	CP000043	9600	15800
50,8	-	D03B	CP000040	DX03B	CP000044		
48,3	1"1/2	D03C	CP000041	DX03C	CP000045		
42,4	1"1/4	D03D	CP000042	DX03D	CP000046		

MATERIALS: Base made of reinforced polyamide black colour; threaded bushing made of brass; fixing bolts and nuts made of stainless steel AISI 304 or zinc plated steel.


FEATURES: Max tightening torque 3,6 Kg-m.

BOX QUANTITY: 8 pieces.

ON REQUEST:


- Bases: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.
- Assembling of: Bolts and nuts.

Bearing head Type: D12 e DX12

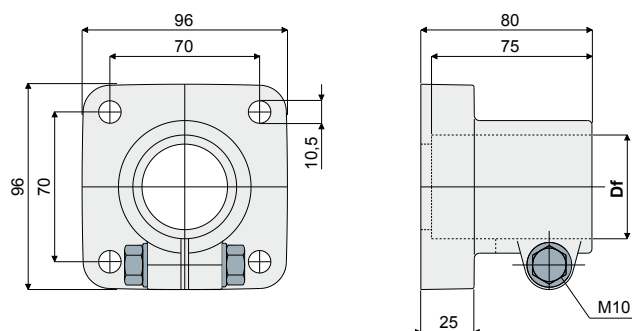

Df Bore for tubes of		Zinc plated bolts and nuts		Stainless steel AISI 304 bolts and nuts	
(mm)	(Inches)	Type	Code	Type	Code
48,3	1"1/2	D12A	CP000047	DX12A	CP000049
50,8	-	D12B	CP000048	DX12B	CP000050

Bearing head Type: D08 e DX08

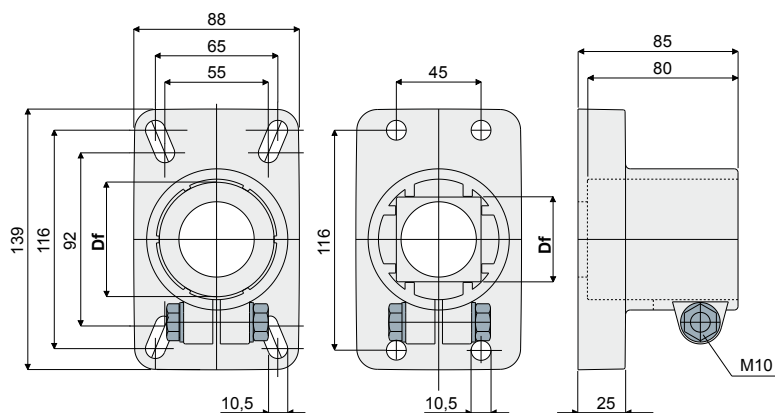

Df Bore for tubes of		Zinc plated bolts and nuts		Stainless steel AISI 304 bolts and nuts	
(mm)	(Inches)	Type	Code	Type	Code
60,3	2"	D08A	CP000051	DX08A	CP000056
50,8	-	D08B	CP000052	DX08B	CP000057
48,3	1"1/2	D08C	CP000053	DX08C	CP000058
42,4	1"1/4	D08D	CP000054	DX08D	CP000059
45x45	tubo quadro	D08E	CP000055	DX08E	CP000060

MATÉRIAUX: Tête en polyamide renforcé couleur noir; boulons de serrage en acier inox AISI 304 ou acier zingué.


CARACTÉRISTIQUES: Couple maximal de serrage 3,6 Kg·m.

CONDITIONNEMENT: 8 pièces.

SUR DEMANDE:


- Têtes: En polypropylène renforcé, dans différentes couleurs.
- Conditionnement: Hors standard.
- Assemblage de: vis, écrous et rondelles.

Side mounting top bracket Type: D11 e DX11

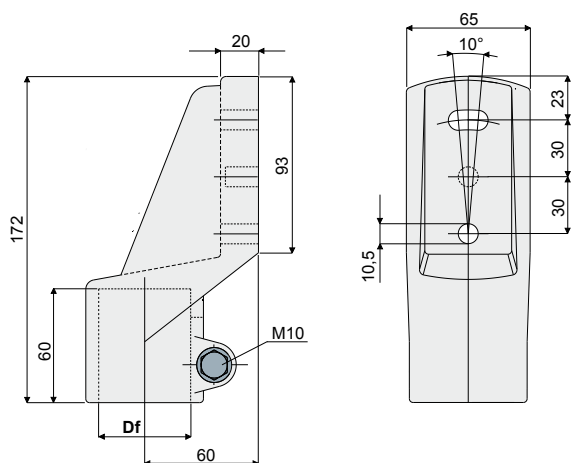

Df Bore for tubes of		Zinc plated bolts and nuts		Stainless steel AISI 304 bolts and nuts	
(mm)	(Inches)	Type	Code	Type	Code
48,3	1"1/2	D11	CP000061	DX11	CP000062

Side mounting top bracket Type: D07 e DX07

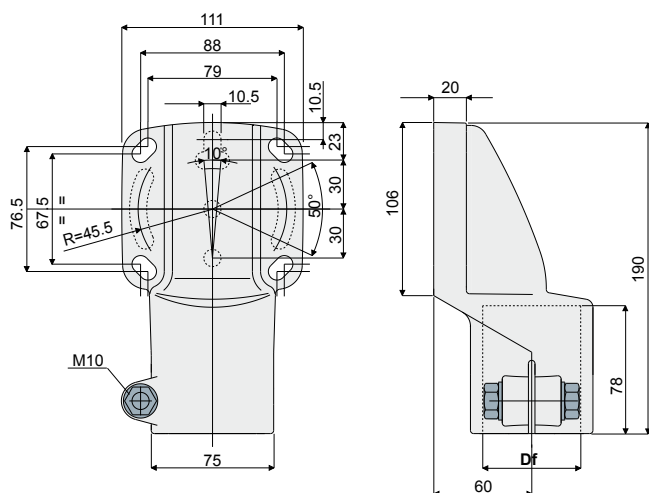

Df Bore for tubes of		Zinc plated bolts and nuts		Stainless steel AISI 304 bolts and nuts	
(mm)	(Inches)	Type	Code	Type	Code
60,3	2"	D07A	CP000063	DX07A	CP000069
50,8	-	D07B	CP000064	DX07B	CP000070
48,3	1"1/2	D07C	CP000065	DX07C	CP000071
42,4	1"1/4	D07D	CP000066	DX07D	CP000072
45x45	square tube	D07E	CP000067	DX07E	CP000073
48,3	trou	D07F	CP000068	DX07T	CP000074

MATERIALS: Top bracket made out of reinforced polyamide black colour; bolts and nuts made out of stainless steel AISI 304 or zinc plated steel.


FEATURES: Max tightening torque 3,6 Kg-m.

BOX QUANTITY: 8 pieces.

ON REQUEST:

- Top brackets: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.
- Assembling of: Bolts and nuts.gg

Connection joint Type: D10 e DX10

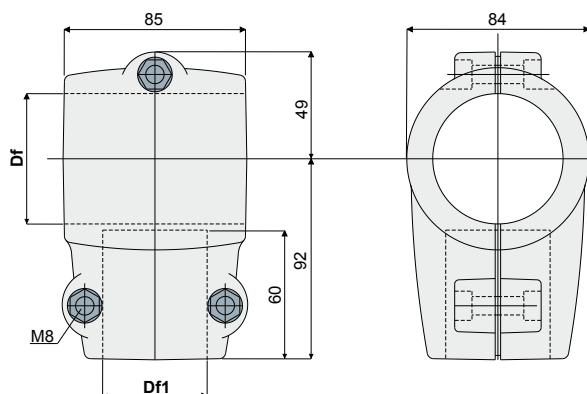

Df		Df1		Zinc plated bolts and nuts		Stainless steel AISI 304 bolts and nuts	
Bore for tubes of		Bore for tubes of		Type	Code	Type	Code
(mm)	(Inches)	(mm)	(Inches)				
60,3	2"	48,3	1"1/2	D10A	CP000075	DX10A	CP000075
60,3	2"	42,4	1"1/4	D10B	CP000076	DX10B	CP000076
48,3	1"1/2	48,3	1"1/2	D10C	CP000077	DX10C	CP000077
48,3	1"1/2	42,4	1"1/4	D10D	CP000078	DX10D	CP000078
42,4	1"1/4	42,4	1"1/4	D10E	CP000079	DX10E	CP000079

MATERIALS: Joint made of reinforced polyamide black colour; bolts and nuts made of stainless steel AISI 304 or zinc plated steel.


FEATURES: Max tightening torque 2 Kg-m.

BOX QUANTITY: 8 pieces.

ON REQUEST:

- Joints: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.
- Assembling of: Bolts and nuts.

Mounting plate (for drip tray support) Type: D35

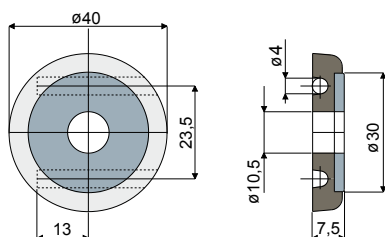

Type	Code
D35	CP000085

MATERIALS: Plate made of reinforced polyamide black colour; washer made of stainless steel AISI 304.



FEATURES: For application on conveyor side to fasten drip tray support.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Box Quantity: According to your request.

Drip tray support Type: D36

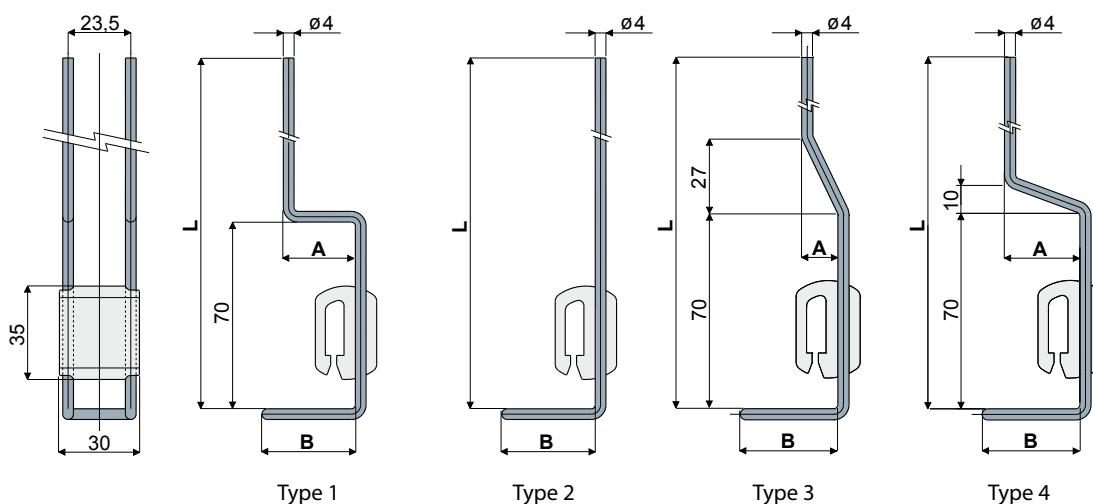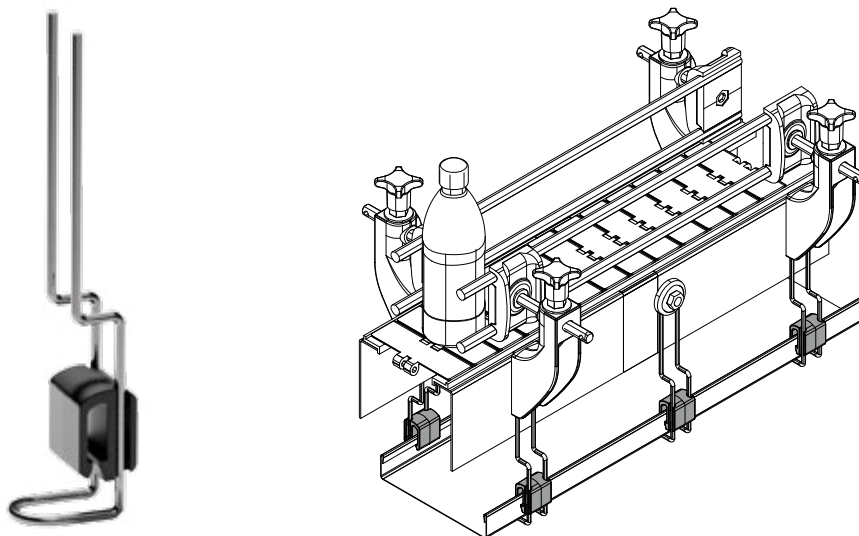

Type 1				
L	B	A	Type	Code
(mm)	(mm)	(mm)		
180	35	27	D36A	CP000086
180	35	17	D36B	CP000087
230	35	27	D36C	CP000088

Type 2			
L	B	Type	Code
(mm)	(mm)		
200	35	D36D	CP000089
246	35	D36E	CP000090

Type 3				
L	B	A	Type	Code
(mm)	(mm)	(mm)		
250	35	13	D36F	CP000091

Type 4				
L	B	A	Type	Code
(mm)	(mm)	(mm)		
280	35	27	D36G	CP000092

MATERIALS: Support elements made of stainless steel AISI 304; body of coupling made of reinforced polyamide black colour.


FEATURES: To be used to support drip trays.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Drip tray supports: Supplied in different shapes and sizes.
- Box Quantity: According to your request.


Guide rail bracket Type: D13

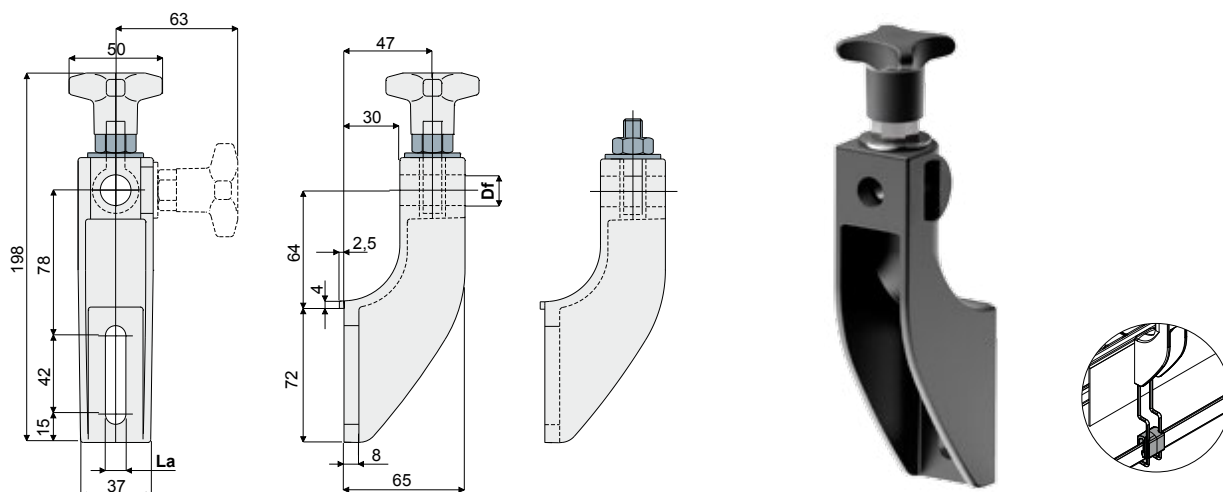

La (9 mm slot)				
Df	With knob		With nut	
Bore for pin of (mm)	Type	Code	Type	Code
12	D13A	CP000093	D13D	CP000096
14	D13B	CP000094	D13E	CP000097
16	D13C	CP000095	D13F	CP000098

La (11 mm slot)				
Df	With knob		With nut	
Bore for pin of (mm)	Type	Code	Type	Code
12	D13G	CP000099	D13L	CP000102
14	D13H	CP000100	D13M	CP000103
16	D13I	CP000101	D13N	CP000104

Guide rail bracket (with adjustable head) Type: D14

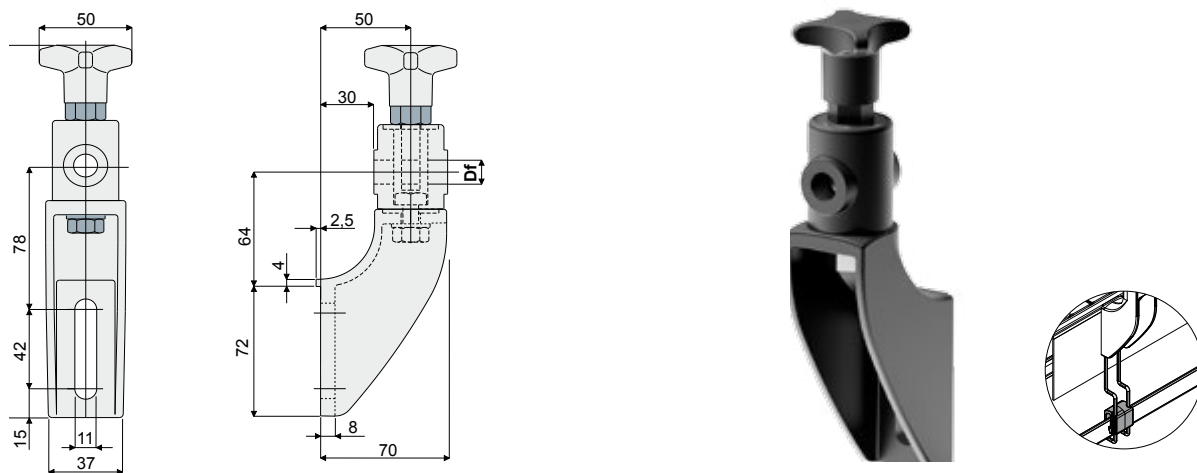

Df	Type	Code
Bore for pin of (mm)		
12	D14A	CP000105
14	D14B	CP000106
16	D14C	CP000107

MATERIALS: Bracket and knob made of reinforced polyamide black colour; hexagonal insert made of nickel plated brass; eyebolt, nut and washer made of stainless steel AISI 304.



FEATURES: Max tightening torque 4 Kg-m.

BOX QUANTITY: 24 pieces.

ON REQUEST:



- Brackets: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Guide rail bracket (with adjustable head) Type: D79

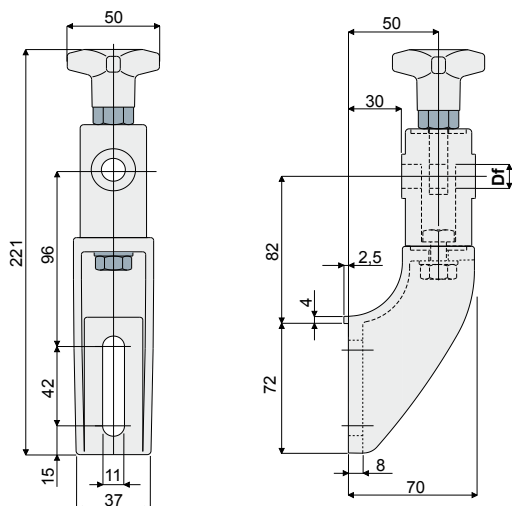

Df Bore for pin of (mm)	Type	Code
12	D79A	CP000108
14	D79B	CP000109
16	D79C	CP000110

Guide rail bracket (with adjustable head) Type: D15

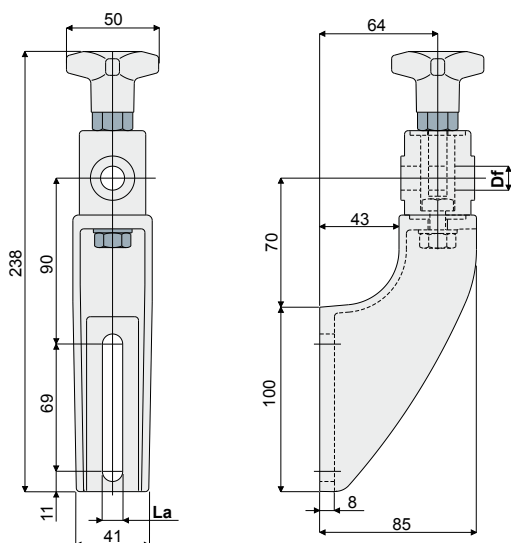

Df Bore for pin of (mm)	La (9 mm slot)		La (11 mm slot)	
	Type	Code	Type	Code
12	D15A	CP000111	D15D	CP000114
14	D15B	CP000112	D15E	CP000115
16	D15C	CP000113	D15F	CP000116

MATERIALS: Bracket and knob made of reinforced polyamide black colour; hexagonal insert made of nickel plated brass; eyebolt, nut and washer made of stainless steel AISI 304.



FEATURES: Max tightening torque 4 Kg-m.

BOX QUANTITY: 24 pieces.

ON REQUEST:



- Brackets: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Guide rail bracket (with adjustable high type head) Type: D80

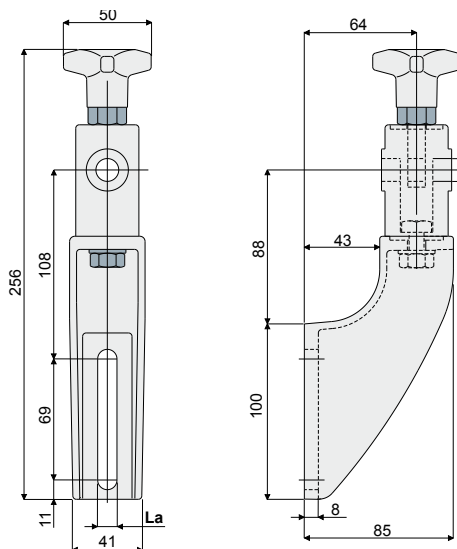

Df Bore for pin of (mm)	La (9 mm slot)		La (11 mm slot)	
	Type	Code	Type	Code
12	D80A	CP000117	D80D	CP000120
14	D80B	CP000118	D80E	CP000121
16	D80C	CP000119	D80F	CP000122

Guide rail bracket (reinforced type with adjustable head) Type: D43

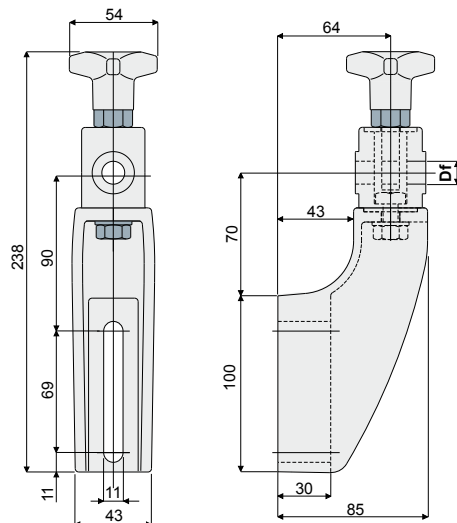

Df Bore for pin of (mm)	Type	Code
12	D43A	CP000123
14	D43B	CP000124
16	D43C	CP000125

MATERIALS: Bracket and knob made of reinforced polyamide black colour; hexagonal insert made of nickel plated brass; eyebolt, screw, nut and washer made of stainless steel AISI 304.



FEATURES: D43 is used for heavy applications, suitable in conveyors with more ways, both in accumulation and curve. D43 and D80 have max tightening torque of 4 Kg-m.

BOX QUANTITY: 24 pieces.

ON REQUEST:



- Brackets: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Guide rail bracket (reinforced type with adjustable high type head) Type: D81

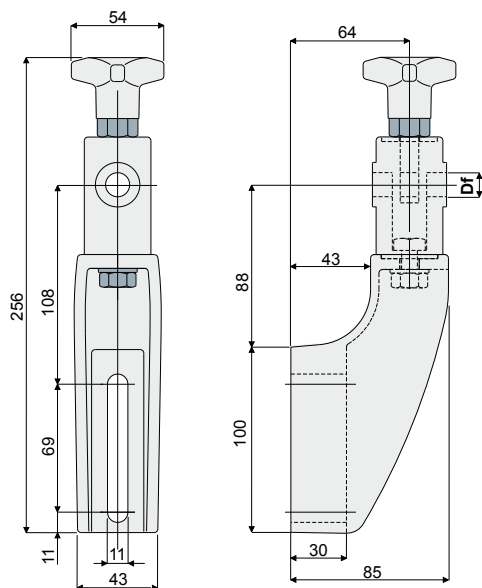

Df Bore for pin of (mm)	Type	Code
12	D81A	CP000126
14	D81B	CP000127
16	D81C	CP000128

Guide rail bracket (with metal adjustable head) Type: D16 e DX16

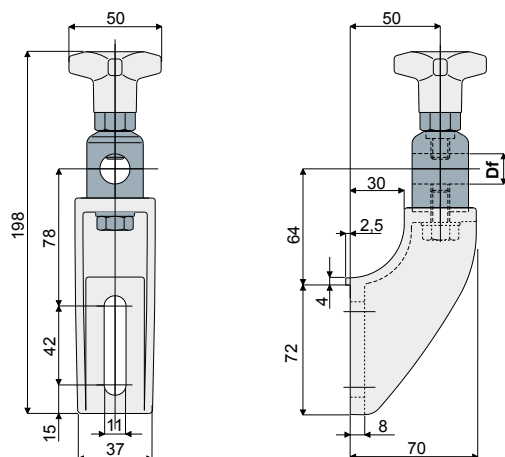

Df Bore for pin of (mm)	Head made out of nickel plated brass	Head made out of stainless steel AISI 304
14 - 16	Type D16 Code CP000129	Type DX16 Code CP000130

MATERIALS: Bracket and knob made out of reinforced polyamide black colour; head made out of stainless steel AISI 304 or nickel plated brass; hexagonal insert made out of nickel plated brass; screw and washer made out of stainless steel AISI 304.



FEATURES: Possibility to use pins with diameter 14 and 16 mm. Max tightening torque 4 Kg-m.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Brackets: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.



Guide rail bracket (with metal adjustable head) Type: D18 e DX18

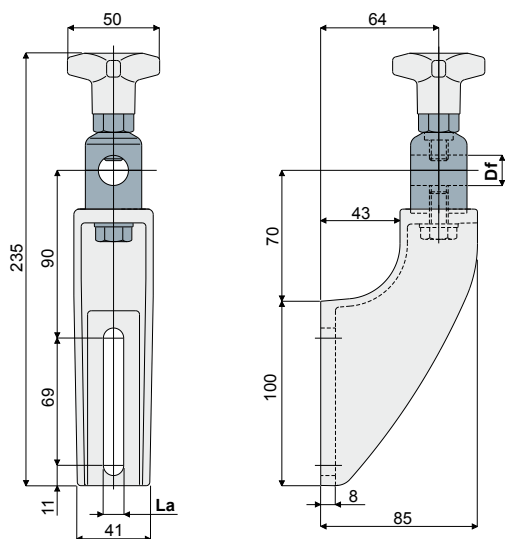

Df Bore for pin of (mm)	La (9 mm slot)			
	Head made out of nickel plated brass		Head made out of stainless steel AISI 304	
	Type	Code	Type	Code
14 - 16	D18A	CP000131	DX18A	CP000132

Df Bore for pin of (mm)	La (11 mm slot)			
	Head made out of nickel plated brass		Head made out of stainless steel AISI 304	
	Type	Code	Type	Code
14 - 16	D18B	CP000133	DX18B	CP000134

Guide rail bracket (reinforced type with metal adjustable head) Type: D44

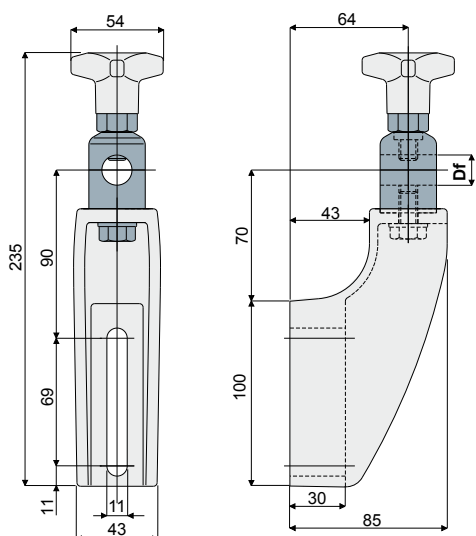

Df Bore for pin of (mm)	Head made out of nickel plated brass		Head made out of stainless steel AISI 304	
	Type	Code	Type	Code
	Type	Code	Type	Code
14 - 16	D44	CP000135	DX44	CP000136

MATERIALS: Bracket and knob made out of reinforced polyamide black colour; head made out of stainless steel AISI 304 or nickel plated brass; hexagonal insert made out of nickel plated brass; screw and washer made out of stainless steel AISI 304.


FEATURES: Possibility to use pins with diameter 14 and 16 mm. Max tightening torque 4 Kg·m. D44 is used for heavy applications, suitable in conveyors with more ways, both in accumulation and curve

BOX QUANTITY: 24 pieces.

ON REQUEST:


- Brackets: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Guide rail bracket (with adjustable head) Type: D17

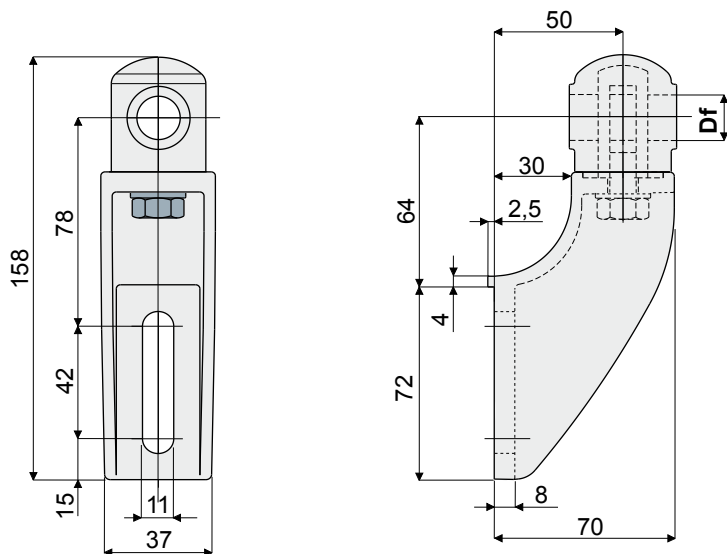

Df Bore for pin of (mm)	Type	Code
12	D17A	CP000137
14	D17B	CP000138
16	D17C	CP000139

Guide rail bracket (with adjustable head) Type: D19

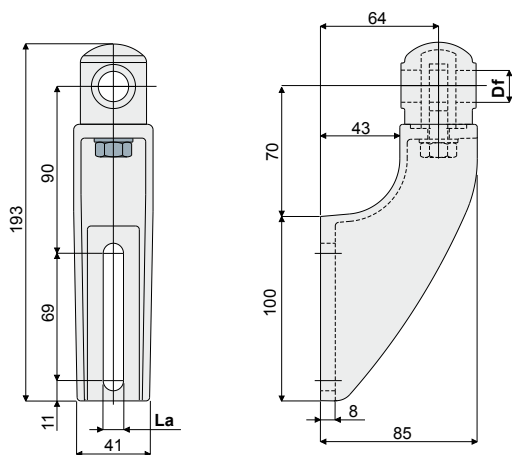

Df Bore for pin of (mm)	La (9 mm slot)		La (11 mm slot)	
	Type	Code	Type	Code
12	D19A	CP000140	D19D	CP000143
14	D19B	CP000141	D19E	CP000144
16	D19C	CP000142	D19F	CP000145

MATERIALS: Bracket and head made of reinforced polyamide black colour; eyebolt, nut and washer made of stainless steel AISI 304.



FEATURES: Max tightening torque 4 Kg·m.

BOX QUANTITY: 24 pieces.

ON REQUEST:



- Brackets: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Guide rail bracket (reinforced type with adjustable head) Type: D55

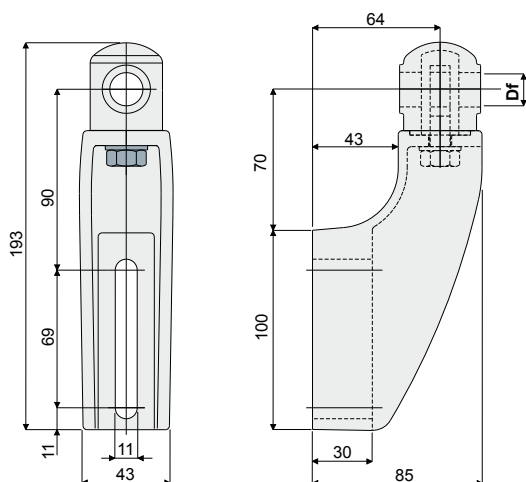

Df Bore for pin of (mm)	Type	Code
12	D55A	CP000146
14	D55B	CP000147
16	D55C	CP000148

Guide rail bracket (with adjustable head) Type: D09

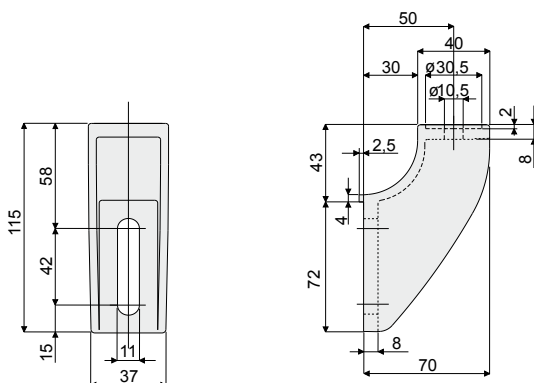

Type	Code
D09	CP000149

MATERIALS: Bracket and head made of reinforced polyamide black colour; eyebolt, nut and washer made of stainless steel AISI 304.



FEATURES: Max tightening torque 4 Kg-m. D55 is used for heavy applications, suitable in conveyors with more ways, both in accumulation and curve. D09 is used with heads D21, D22, D23 and D66.

BOX QUANTITY: 24 pieces.

ON REQUEST:



- Brackets: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Guide rail bracket (with adjustable head) Type: D20

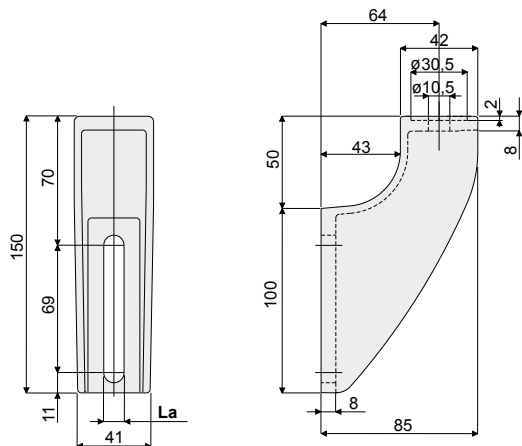

La (9 mm slot)		La (11 mm slot)	
Type	Code	Type	Code
D20A	CP000150	D20B	CP000151

Guide rail bracket (reinforced type with adjustable head) Type: D42

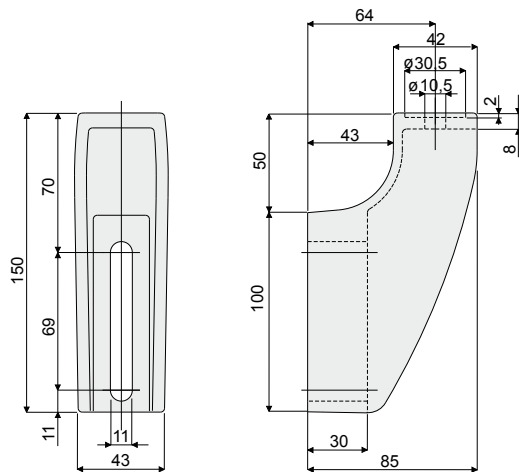

Type	Code
D42	CP000152

MATERIALS: Bracket made of reinforced polyamide black colour.

FEATURES: Each type are used with heads D21, D22, D23 and D66 for heavy applications.



D42 is suitable in conveyors with more ways, both in accumulation and curve.

BOX QUANTITY: 24 pieces.

ON REQUEST:



- Brackets: In reinforced polypropylene, other colours.

Head for bracket Type: D22

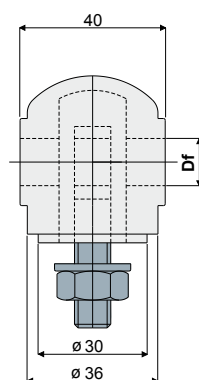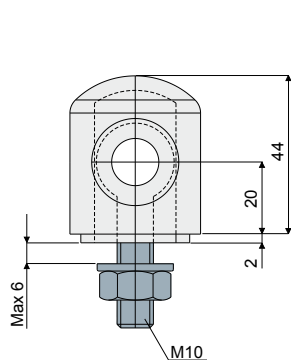

Df Bore for pin of (mm)	Type	Code
12	D22A	CP000153
14	D22B	CP000154
16	D22C	CP000155

Head for bracket Type: D21

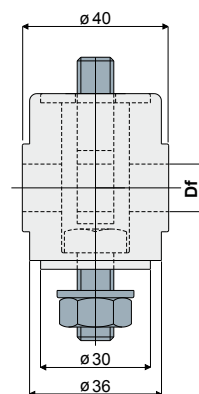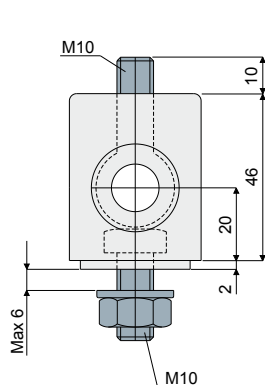

Df Bore for pin of (mm)	Type	Code
12	D21A	CP000156
14	D21B	CP000157
16	D21C	CP000158

MATERIALS: Head made of reinforced polyamide black colour; eyebolt, nut and washer made of stainless steel AISI 304.


FEATURES: Each parts are used with bracket D09, D20 and D42. Max tightening torque 4 Kg·m.

BOX QUANTITY: 24 pieces.

ON REQUEST:


- Heads: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Head for bracket (high type) Type: D66

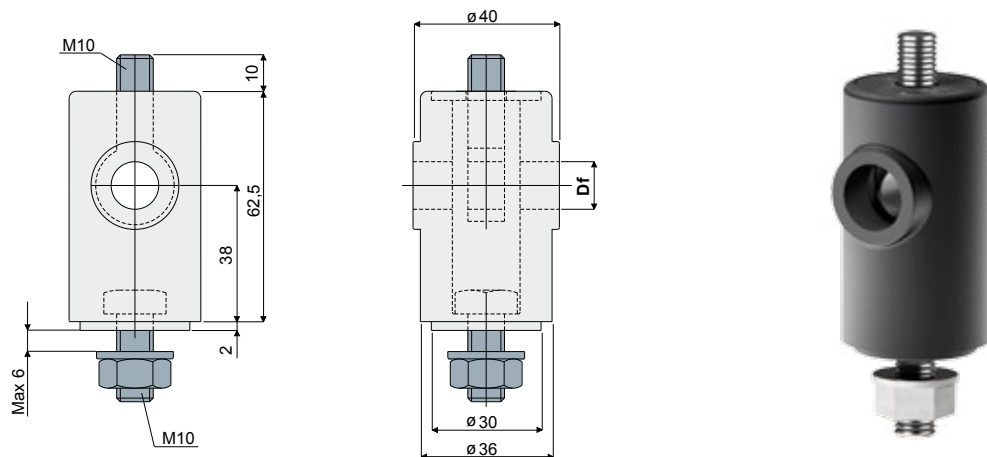

Df Bore for pin of (mm)	Type	Code
12	D66A	CP000159
14	D66B	CP000160
16	D66C	CP000161

Head for bracket (metal) Type: D23 e DX23

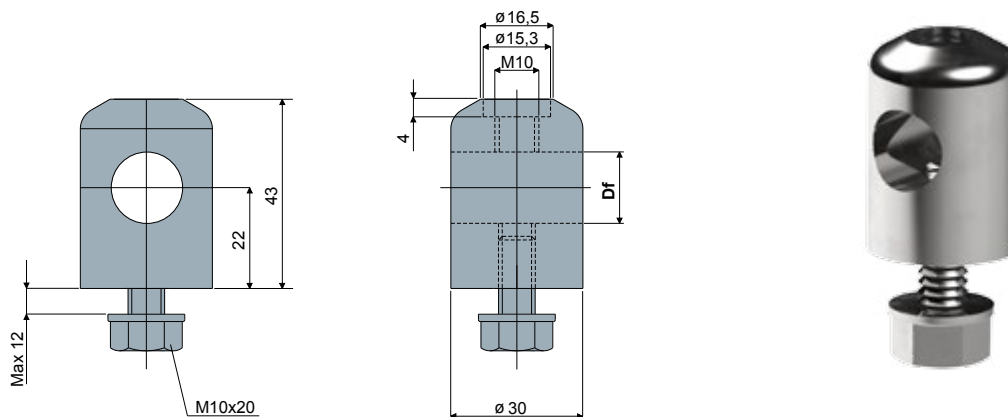

Df Bore for pin of (mm)	Head made out of nickel plated brass		Head made out of stainless steel AISI 304	
	Type	Code	Type	Code
14 - 16	D23	CP000162	DX23	CP000163

MATERIALS: Head made of reinforced polyamide black colour; eyebolt, nuts and washer made of stainless steel AISI 304.

FEATURES: The two heads are used with bracket D09, D20 and D42. Max tightening torque 4 Kg-m.


N.B.: With D23 there is the possibility to use pins with diameter 14 and 16 mm.

BOX QUANTITY: 24 pieces.

ON REQUEST:



- Heads: Made of reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Spacer for bracket Type: D24

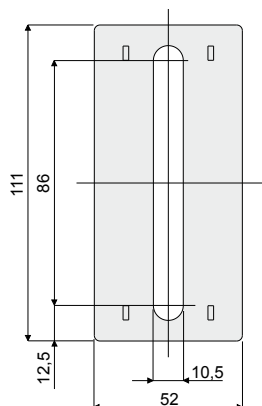




Type	Code
D24	CP000164

Spacer for bracket Type: D25

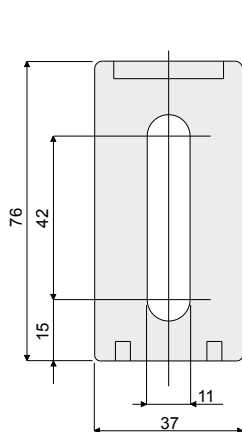

Type	Code
D25	CP000165

Spacer for heads Type: D56

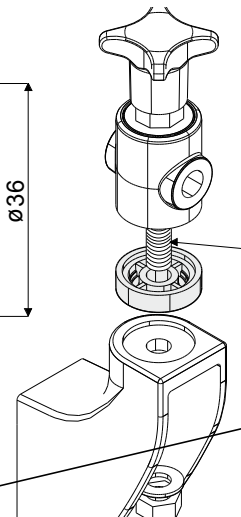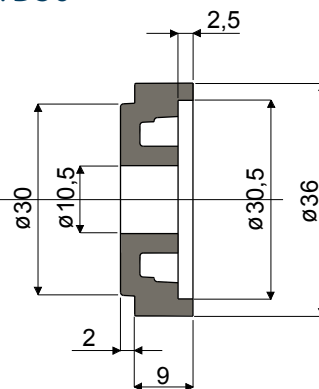

Type	Code
D56	CP000166

N.B.: To use the spacer, it is necessary to change the standard screw with a longer one.

MATERIALS: Spacer made of reinforced polyamide black colour.


FEATURES: Accessory to be used on brackets D14, D15, D16, D17, D19, D55, D09, D20, D42, D18, D43, D44, D79, D80, D81 to increase heads height. D24 is used with brackets D15, D18, D19, D20, D42, D43, D44, D55, D80, D81 and D25 is used with D13, D14, D16, D17, D09 and D79.

BOX QUANTITY: 24 pieces.

ON REQUEST:


- Spacers: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Guide rail clamp (for rectangular rails) Type: D89

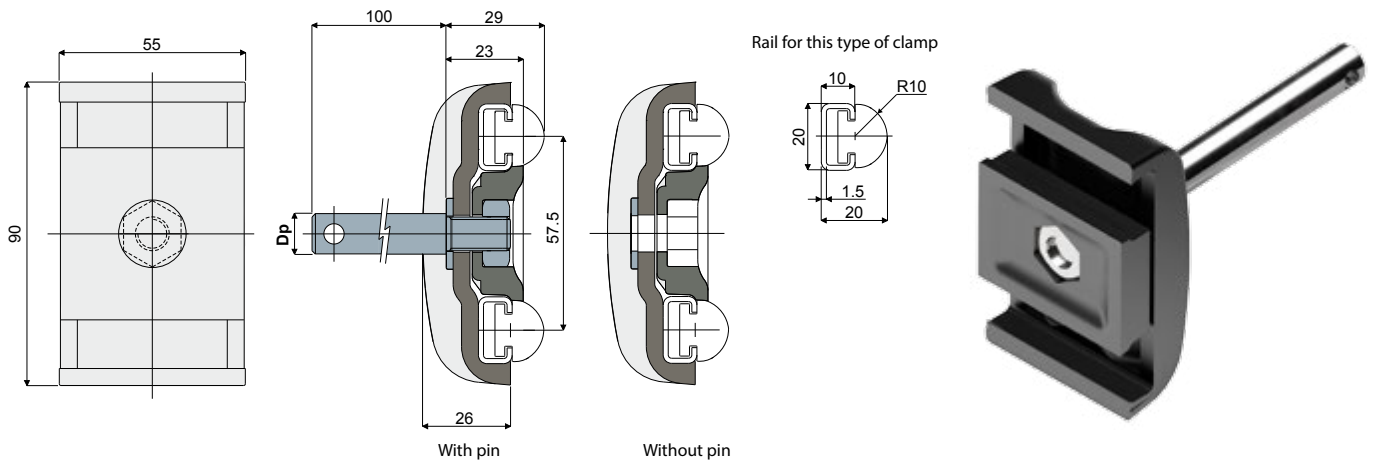

Dp Pin diameter (mm)	With pin		Without pin	
	Type	Code	Type	Code
12	D89A	CP000167		
14	D89B	CP000168	D89D	CP000170
16	D89C	CP000169		

Guide rail clamp (for round rails) Type: D29

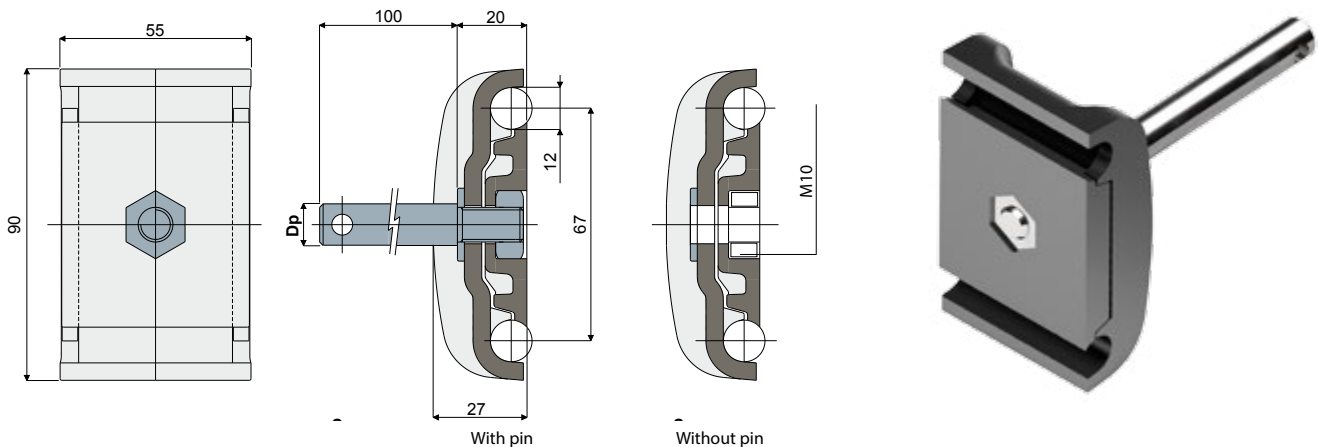

Dp Pin diameter (mm)	With pin		Without pin	
	Type	Code	Type	Code
12	D29A	CP000171		
14	D29B	CP000172	D29D	CP000174
16	D29C	CP000173		

MATERIALS: Clamp made of reinforced polyamide black colour; pin, nut and washer made of stainless steel AISI 304.


FEATURES: Supplied with or without support pin.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Clamps: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Guide rail clamp (for trapezoidal rails) Type: D30

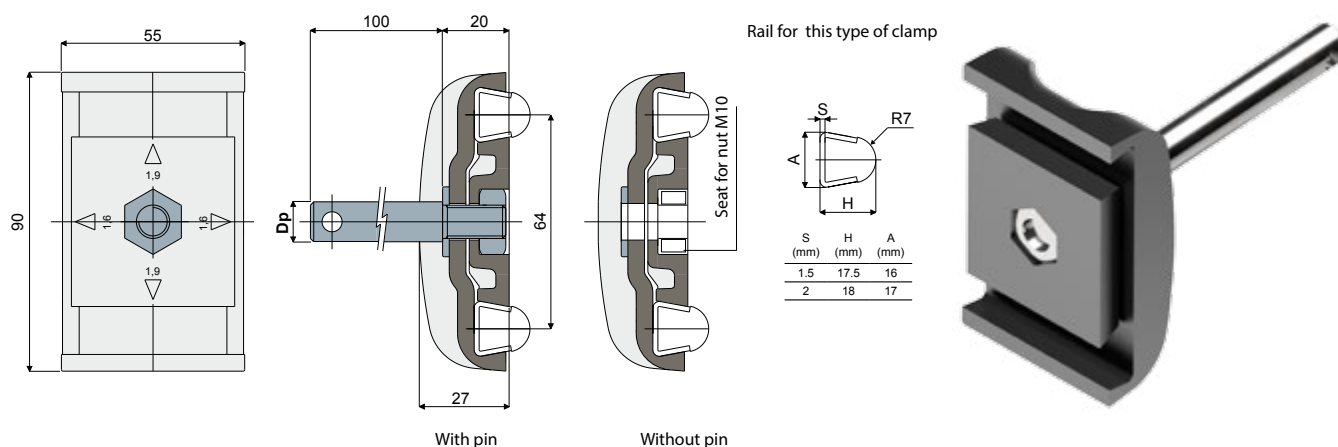

Dp Pin diameter (mm)	With pin		Without pin	
	Type	Code	Type	Code
12	D30A	CP000175		
14	D30B	CP000176	D30D	CP000178
16	D30C	CP000177		

MATERIALS: Clamp made of reinforced polyamide black colour; pin, nut and washer made of stainless steel AISI 304.


FEATURES: Supplied with or without support pin. This part can be used with rails with thickness of 1,5 and 2 mm, by rotating for 90° the central plate.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Clamps: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Guide rail clamp (for round rails) Type: D31

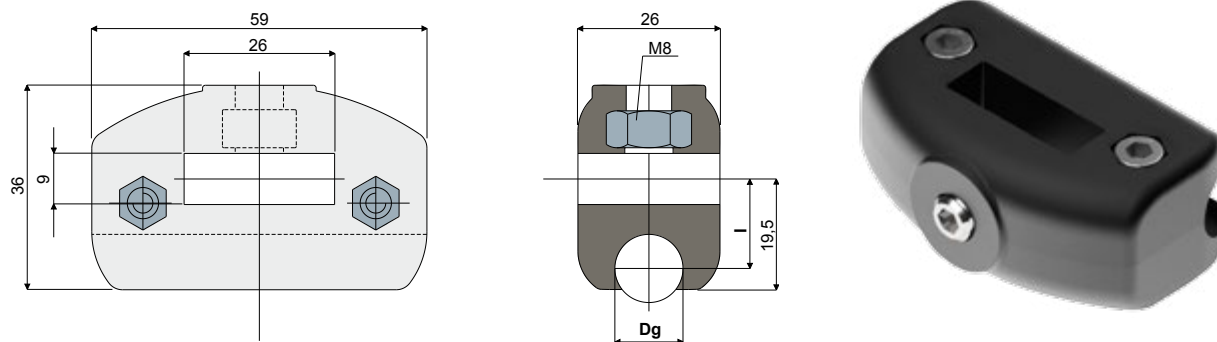

Dg Rail diameter (mm)	l (mm)	Type	Code
8	16	D31A	CP000179
10	15	D31B	CP000180
12	15	D31C	CP000181
14	15	D31D	CP000182

MATERIALS: Clamp made of reinforced polyamide black colour; screws and nuts made of stainless steel AISI 304.


FEATURES: Supplied assembled. To be used with flat support with sizes 25x8 mm.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Clamps: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Guide rail clamp (for trapezoidal rails) Type: D32

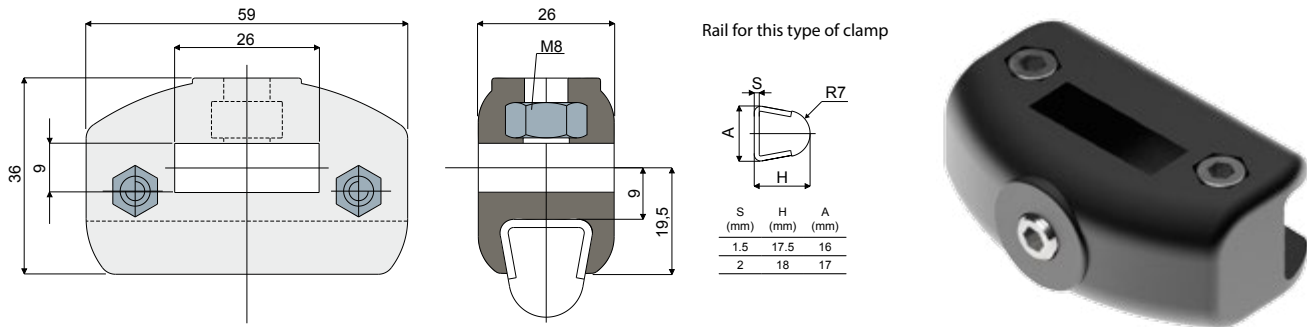

Type	Code
D32	CP000183

MATERIALS: Clamp made of reinforced polyamide black colour; screws and nuts made of stainless steel AISI 304.


FEATURES: Supplied assembled. To be used with flat support with sizes 25x8 mm. This part can be used with rails with thickness of 1,5 and 2 mm.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Clamps: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Guide rail clamp (for round rails) Type: T46

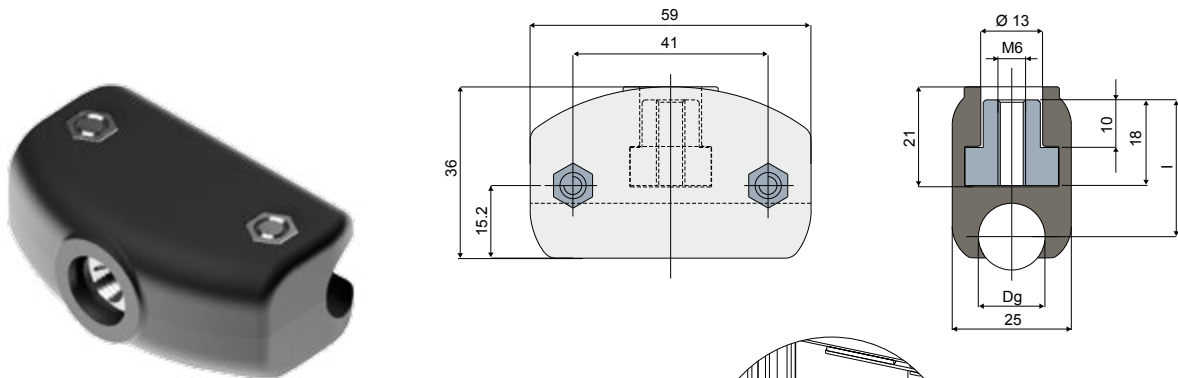

Dg Rail diameter (mm)	l (mm)	Type	Code
8	30	T46A	CP000184
10	29.5	T46B	CP000185
12	29.5	T46C	CP000186
14	28.7	T46D	CP000187


MATERIALS: Clamp made of reinforced polyamide black colour; threaded insert in nickel plated brass; bolts and nuts in stainless steel AISI 304.

FEATURES: Designed appositely to be assembled directly on the pneumatic cylinder for the rails regulation. Supplied assembled.

BOX QUANTITY: 24 pieces.


ON REQUEST:

- Clamps: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

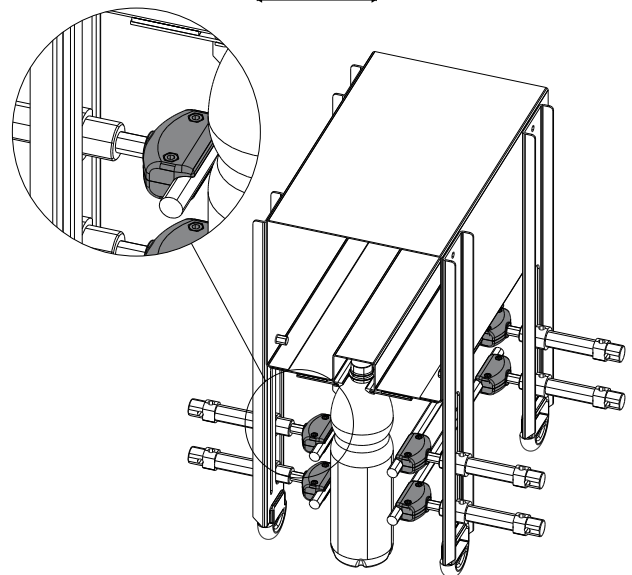

Example of application

Guide rail clamp (for rectangular rails) Type: D91

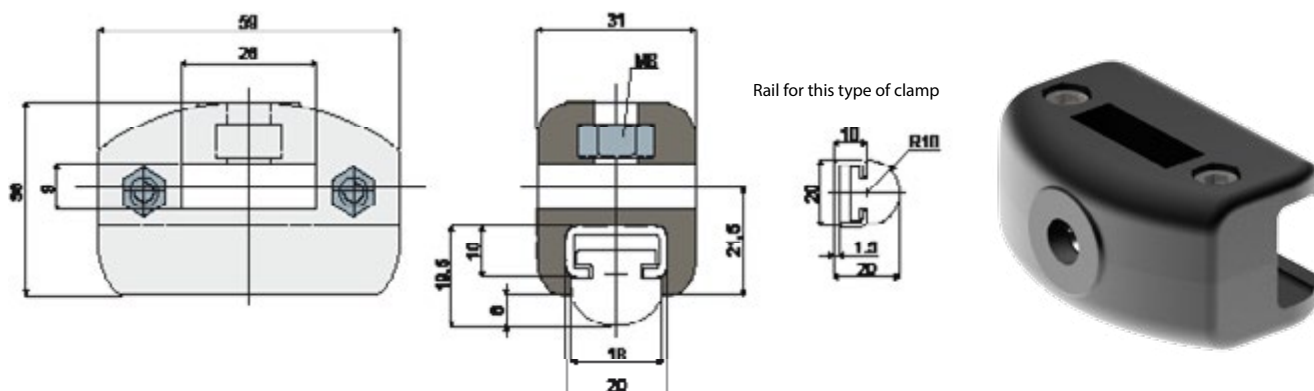

Type	Code
D91	CP000188

MATERIALS: Clamp made of reinforced polyamide black colour; screws and nuts made of stainless steel AISI 304.


FEATURES: Supplied assembled. To be used with flat profile with sizes 25x8 mm.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Clamps: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Guide rail clamp (for trapezoidal rails) Type: T47

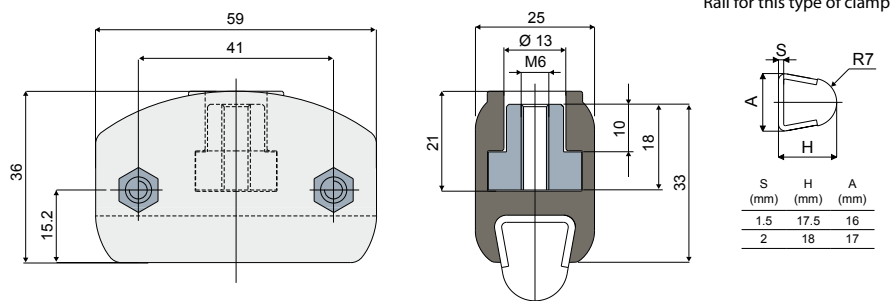

Type	Code
T47	CP000189


MATERIALS: Clamp made of reinforced polyamide black colour; threaded insert in nickel plated brass; bolts and nuts in stainless steel AISI 304.

FEATURES: designed appositely to be assembled directly on the pneumatic cylinder for the rails regulation. Supplied assembled.

BOX QUANTITY: 24 pieces.




ON REQUEST:

- Clamps: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

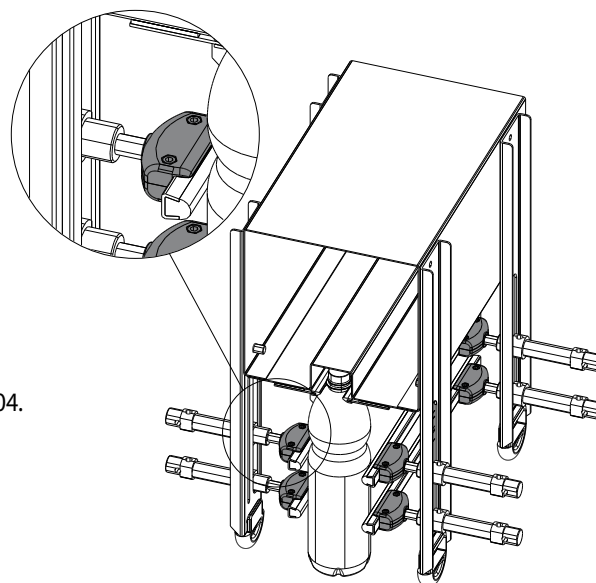

Example of application




Guide rail clamp (for round rails) Type: T48

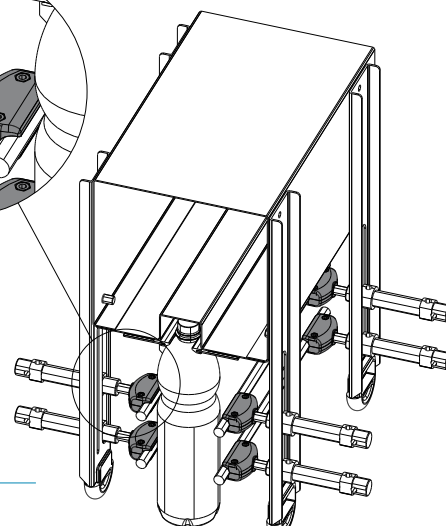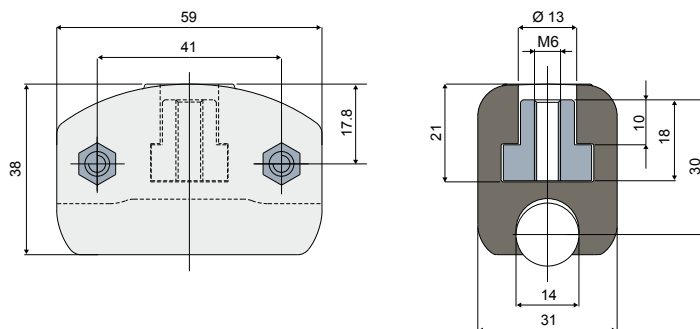

Example of application

Type	Code
T48	CP000190

Guide rail clamp (for rectangular rails) Type: T49

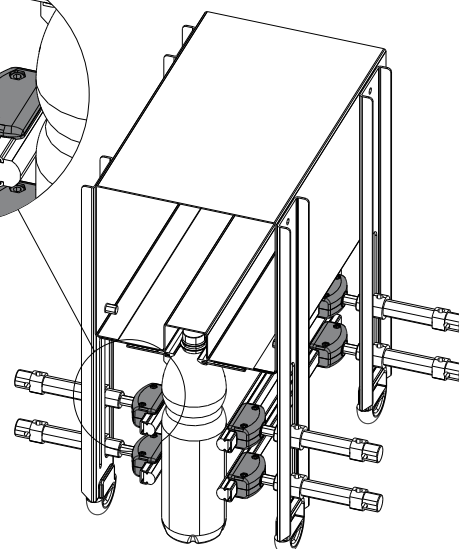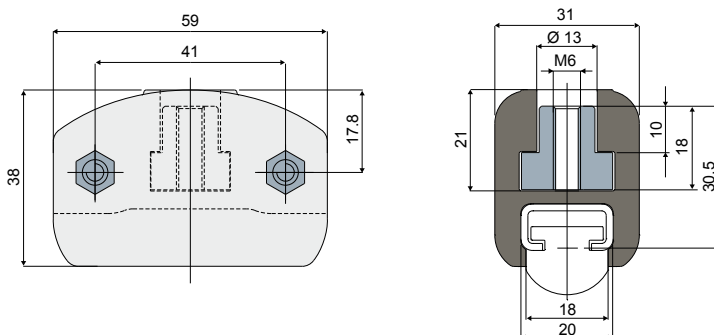

Example of application

Type	Code
T49	CP000191

MATERIALS: Clamp made of reinforced polyamide black colour; threaded insert in nickel plated brass; bolts and nuts in stainless steel AISI 304.


FEATURES: Designed appositely to be assembled directly on the pneumatic cylinder for the rails regulation. Supplied assembled.

BOX QUANTITY: 24 pieces.

ON REQUEST:


- Clamps: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Guide rail clamp (for rectangular rail) Type: D90

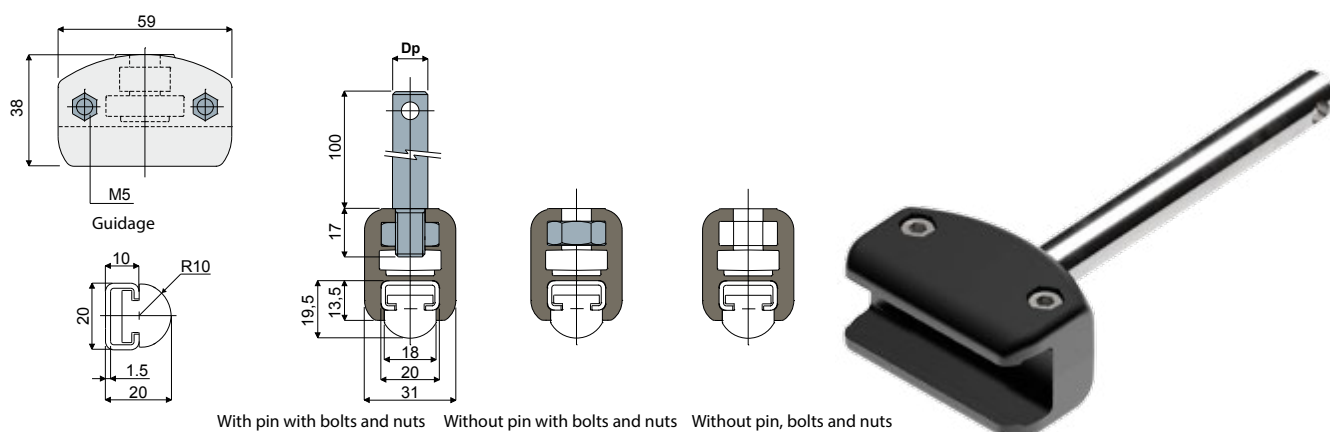

Dp Pin diameter (mm)	With pin with bolts and nuts		Without pin with bolts and nuts		Without pin, bolts and nuts	
	Type	Code	Type	Code	Type	Code
12	D90A	CP000192				
14	D90B	CP000193	D90D	CP000195	D90E	CP000196
16	D90C	CP000194				

Guide rail clamp (for trapezoidal rail) Type: D05

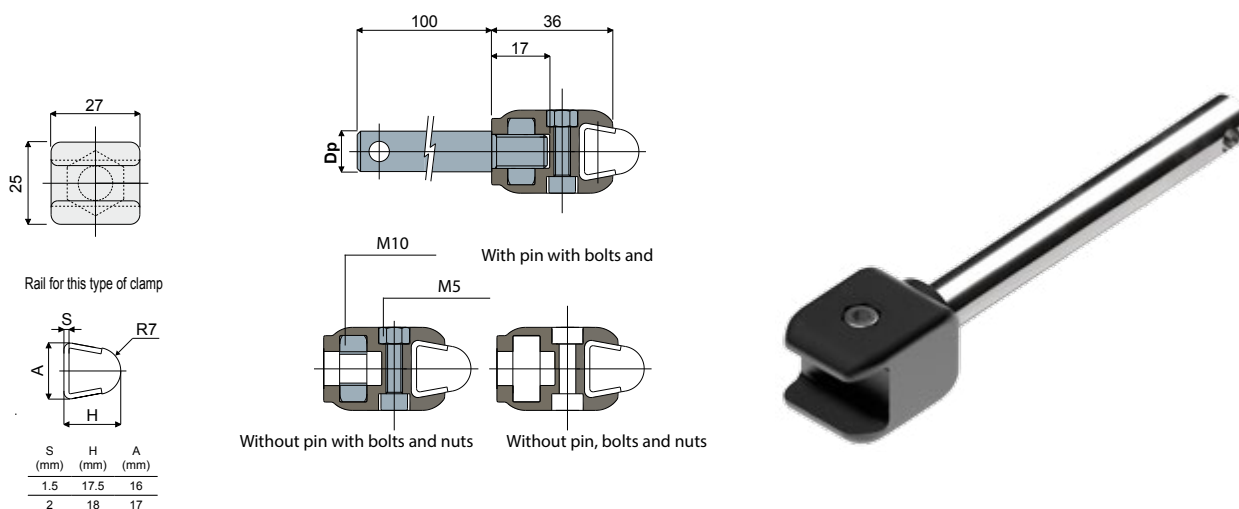

Dp Pin diameter (mm)	With pin with bolts and nuts		Without pin with bolts and nuts		Without pin, bolts and nuts	
	Type	Code	Type	Code	Type	Code
12	D05A	CP000197				
14	D05B	CP000198	D05D	CP000200	D05E	CP000201
16	D05C	CP000199				

MATERIALS: Clamp made of reinforced polyamide black colour; pin, bolts and nuts made of stainless steel AISI 304.


FEATURES: Supplied with or without support pin and with or without bolts and nuts. D05 can be used with rails with thickness of 1,5 and 2 mm.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Clamps: In reinforced polypropylene, other colours.
- Box Quantity: According to your request. Conditionnement: Hors standard.

Guide rail clamp (for round rail) Type: D04

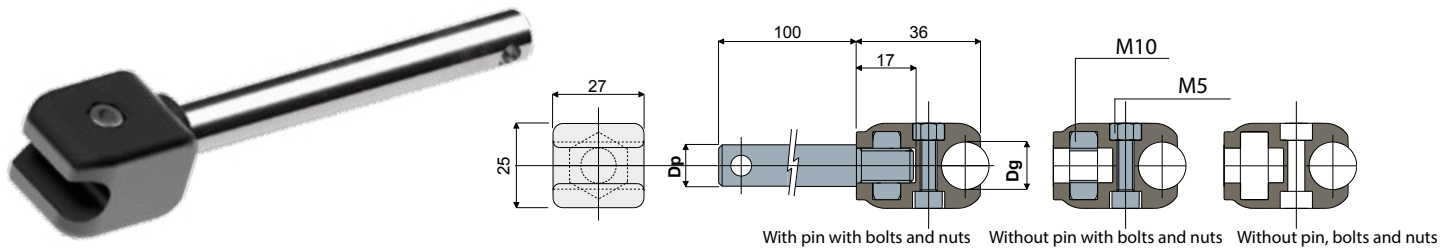

Dp Pin diameter (mm)	Dg Rail diameter (mm)	With pin with bolts and nuts	
		Type	Code
12	8	D04A	CP000202
	10	D04B	CP000203
	12	D04C	CP000204
	14	D04D	CP000205
14	8	D04E	CP000206
	10	D04F	CP000207
	12	D04G	CP000208
	14	D04H	CP000209
16	8	D04I	CP000210
	10	D04L	CP000211
	12	D04M	CP000212
	14	D04N	CP000213

Dg Rail diameter (mm)	Without pin with bolts and nuts	
	Type	Code
8	D04O	CP000214
10	D04P	CP000215
12	D04Q	CP000216
14	D04R	CP000217

Dg Rail diameter (mm)	Without pin	
	Type	Code
8	D04S	CP000218
10	D04T	CP000219
12	D04U	CP000220
14	D04V	CP000221

MATERIALS: Clamp made of reinforced polyamide black colour; pin, bolts and nuts made of stainless steel AISI 304.


FEATURES: Supplied with or without support pin and with or without bolts and nuts.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Clamps: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.


Threaded pin Type: T01

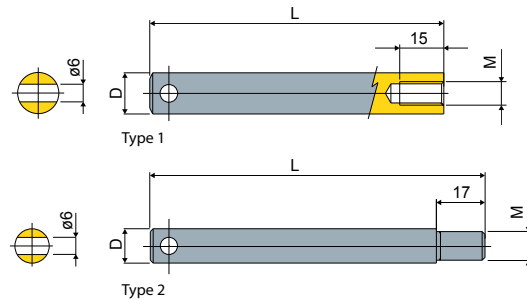

D (mm)	L (mm)	M (mm)	Type 1	
			Type	Code
14	100	M8	T01A	CP000222

D (mm)	L (mm)	M (mm)	Type 2	
			Type	Code
12	117	M10	T01B	CP000223
14	117	M10	T01C	CP000224
16	117	M10	T01D	CP000225

Example of application

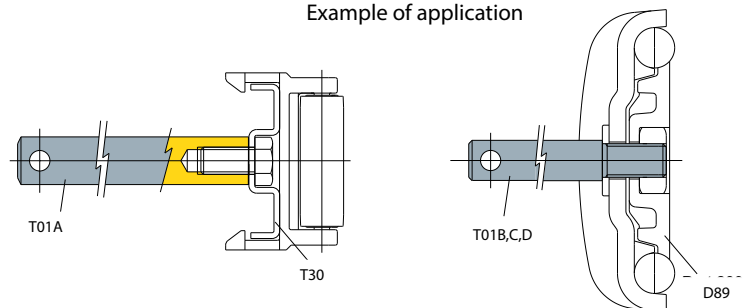

MATERIALS: Pin made of stainless steel AISI 304.

FEATURES: Type 1: can be mounted both on guide rail clamps or on side guides;



Type 2: used for the mounting of Part. 289, 229, 230, 290, 204, 205.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Pins: In various lengths.
- Box Quantity: According to your request.

Spacer for chain profile Type: T02

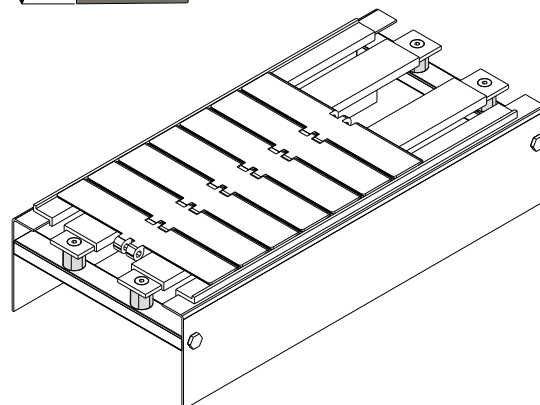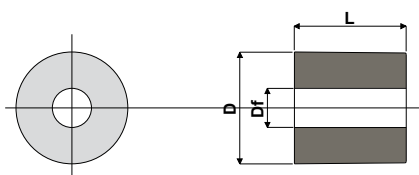

Df Bore diameter	D	L	Type	Code
(mm)	(mm)	(mm)		
7	20	20	T02A	CP000226
7	20	27,5	T02B	CP000227

MATERIALS: Spacer made of reinforced polyamide black colour.




FEATURES: To be used as fixing spacer for chain profiles.

BOX QUANTITY: 96 pieces.

ON REQUEST:

- Spacers: With special bores and sizes.
- Box Quantity: According to your request.

Spacer for rail-holder cylinder Type: T16

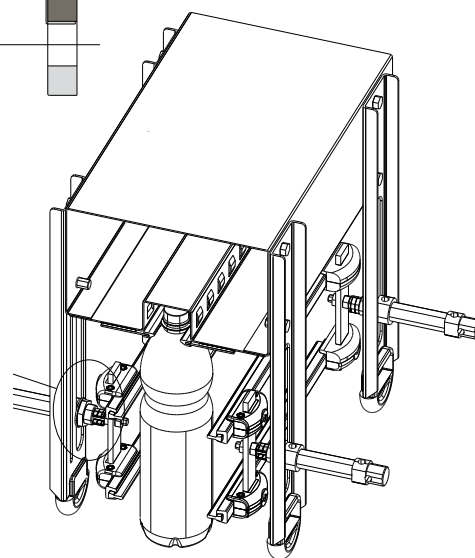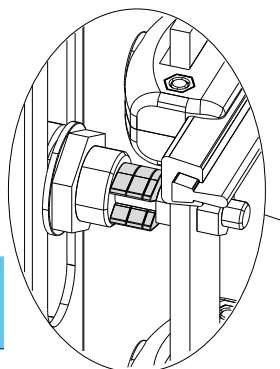

Example of application

Df Bore diameter	D	L	Type	Code
(mm)	(mm)	(mm)		
8	16	2,5	T16A	CP000228
8	16	5	T16B	CP000229

MATERIALS: Spacer made of polyamide black colour.


FEATURES: To be used as spacer for the stroke regulation of rail-holder pneumatic cylinder.

BOX QUANTITY: 96 pieces.

ON REQUEST:




- Spacers: With special bores and sizes.
- Box Quantity: According to your request.

Clamp support for photocells (for photocells and reflectors) Type: D06

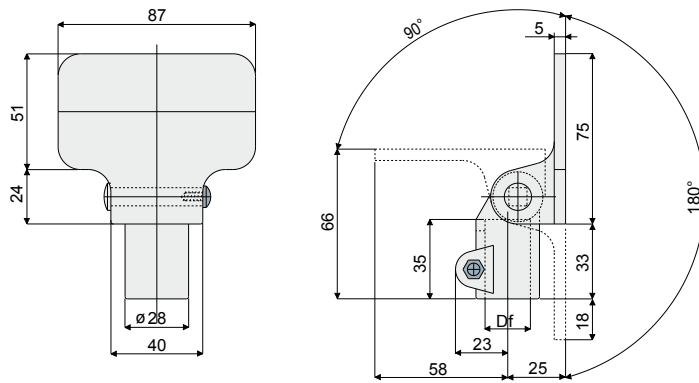

Df Bore for pin of (mm)	Type	Code
12	D06A	CP000230 (can be used also with square pins 10x10)
14	D06B	CP000231
15	D06C	CP000232
16	D06D	CP000233
18	D06E	CP000234
20	D06F	CP000235

« T » clamp (to support rails and photocells) Type: D38

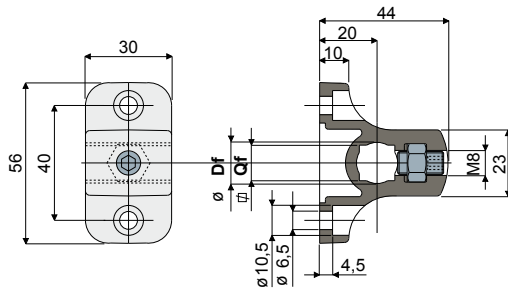

Example of application

Df round (mm)	Bore for pin of Qf square (mm)	Type	Code
10	8	D38A	CP000236
12	10	D38B	CP000237
14	12	D38C	CP000238

MATERIALS: Clamp made of reinforced polyamide black colour; screw and nuts made of stainless steel AISI 304.



FEATURES: Possibility of assembly in various positions. D38 can be used with round and square pins either.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Clamps: With different bores sizes, in reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Spacer for clamp (for « T » clamp, D38) Type: T24

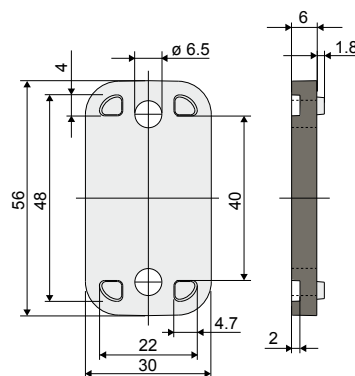

Type	Code
T24	CP000239


MATERIALS: Spacer made of reinforced polyamide black colour.

FEATURES: Accessory to be applied to "T" clamp, D38.

BOX QUANTITY: 24 pieces.


ON REQUEST:

- Spacers: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.



Example of application

Cross clamp Type: D39

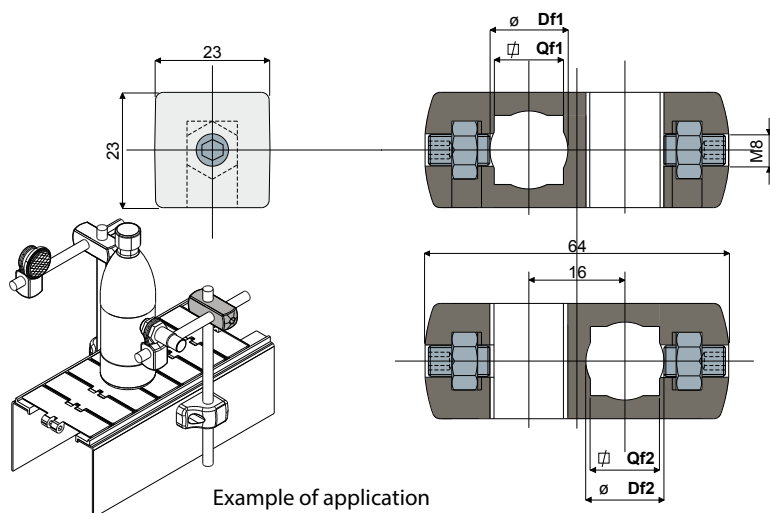

Bore for pin of		Bore for pin of		Type	Code
Df1	Qf1	Df2	Qf2		
round	square	round	square		
(mm)	(mm)	(mm)	(mm)		
10	8	10	8	D39A	CP000240
12	10	12	10	D39B	CP000241
14	12	14	12	D39C	CP000242

MATERIALS: Clamp made of reinforced polyamide black colour; screws and nuts made of stainless steel AISI 304.


FEATURES: This part can be used with round and square pins either.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Clamps: With different bores sizes, in reinforced polypropylene, other colours.
- Box Quantity: According to your request.


Bore for pin of					
Df round	Qf square	Without blocking pin		With blocking pin	
(mm)	(mm)	Type	Code	Type	Code
10	8	D37A	CP000243	D37D	CP000246
12	10	D37B	CP000244	D37E	CP000247
14	12	D37C	CP000245	D37F	CP000248

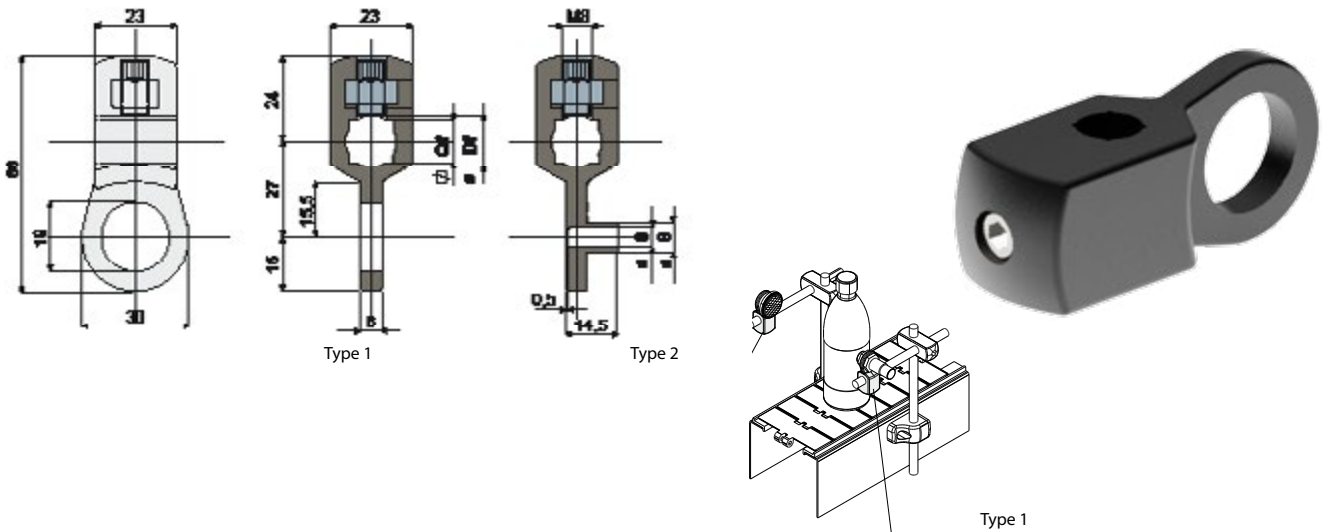

Bore for pin of		Type 1 (for photocells)		Type 2 (for reflectors)	
Df round (mm)	Qf square (mm)				
10	8	D40A	CP000249	D40D	CP000252
12	10	D40B	CP000250	D40E	CP000253
14	12	D40C	CP000251	D40F	CP000254

- Clamps: With different bores sizes, in reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Cross clamp Type: D41

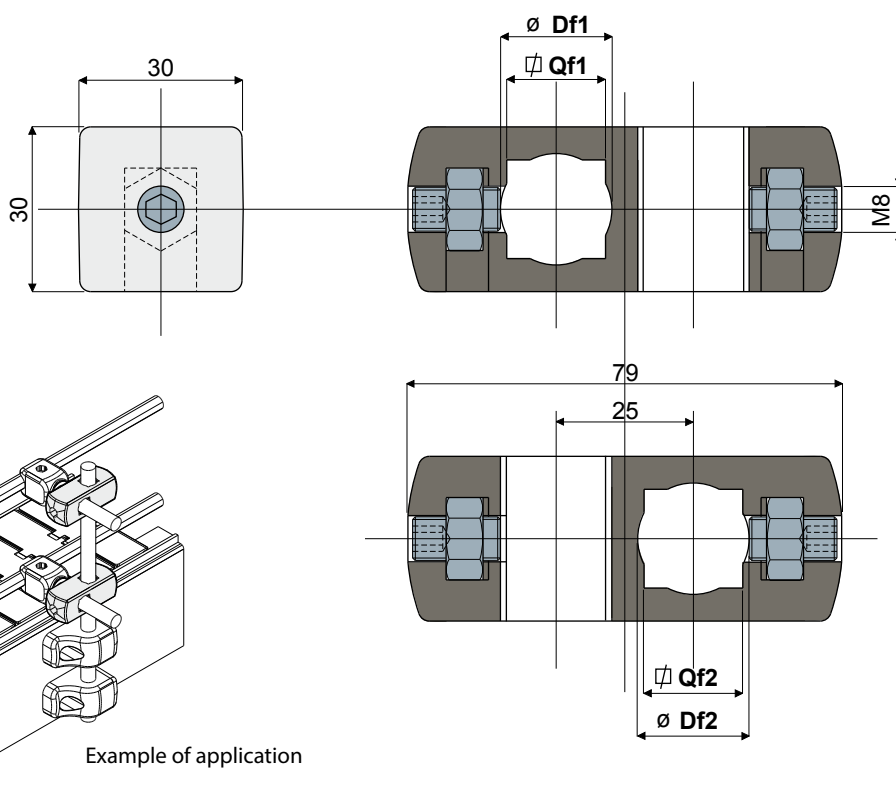

Example of application

Bore for pin of		Bore for pin of		Type	Code
Df1 round	Qf1 square	Df2 round	Qf2 square		
(mm)	(mm)	(mm)	(mm)		
14	12	14	12	D41A	CP000255
15	-	15	-	D41B	CP000256
16	-	16	-	D41C	CP000257
18	-	18	-	D41D	CP000258
20	-	20	-	D41E	CP000259

MATERIALS: Clamp made of reinforced polyamide black colour; screws and nuts made of stainless steel AISI 304.



FEATURES: This part can be used with round and square pins either, only in the version Df1 14.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Clamps: With different bores sizes, in reinforced polypropylene, other colours.
- Box Quantity: According to your request.



Cross block Type: D97

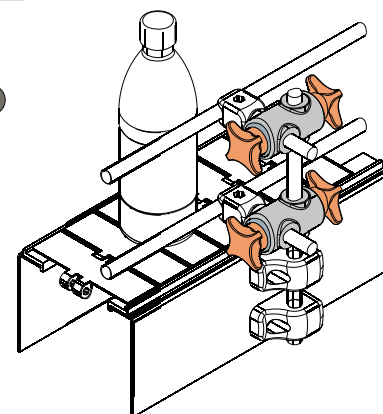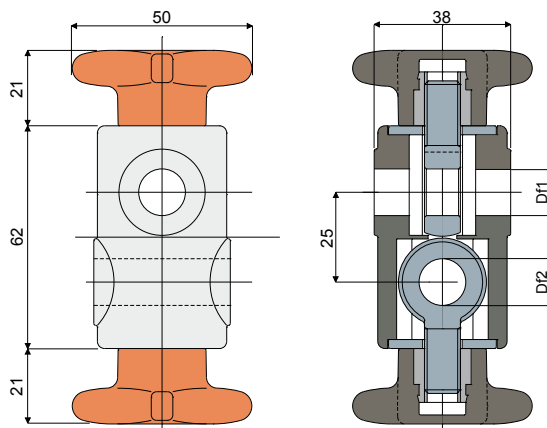

Example of application

Df1 Bore for pin of (mm)	Df2 Bore for pin of (mm)	Type	Code
12	12	D97	CP000260

Cross block Type: T12

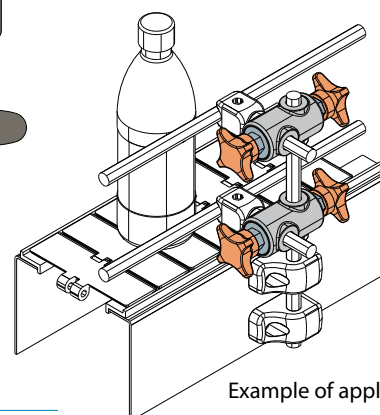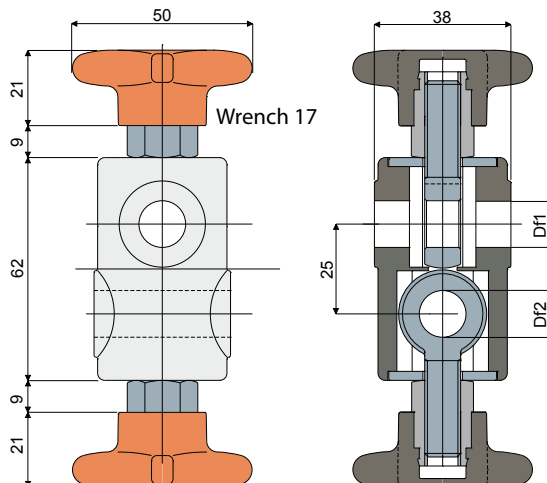

Example of application

Df1 Bore for pin of (mm)	Df2 Bore for pin of (mm)	Type	Code
12	12	T12A	CP000261
14	14	T12B	CP000262
16	16	T12C	CP000263

MATERIALS: Housing in reinforced polyamide black colour and knob in reinforced polyamide orange colour; eyebolts in stainless steel AISI 304; threaded insert in nickel plated brass.


FEATURES: To be used to support the rail-holder pins.

BOX QUANTITY: 24 pieces.

ON REQUEST:


- Housings and Knobs: in reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Knob for bracket Type: D26

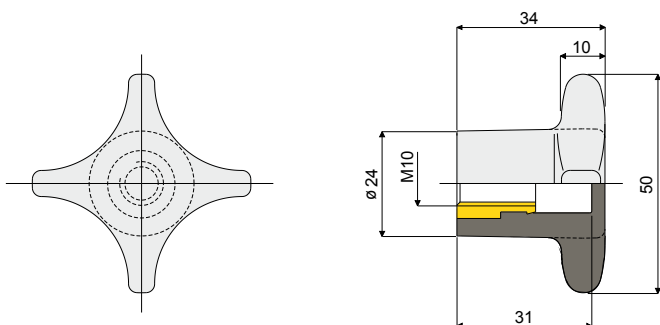


Type	Code
D26	CP000264

Knob for bracket Type: D27

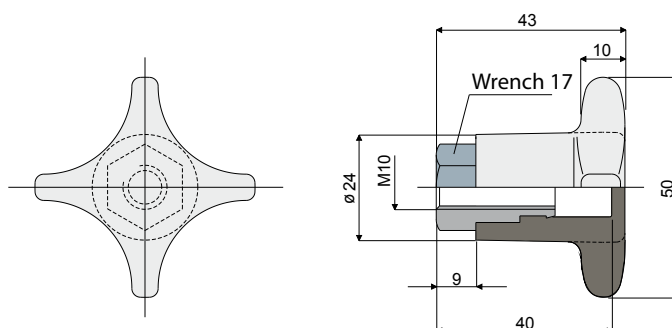

Type	Code
D27	CP000265

Knob for bracket Type: D28

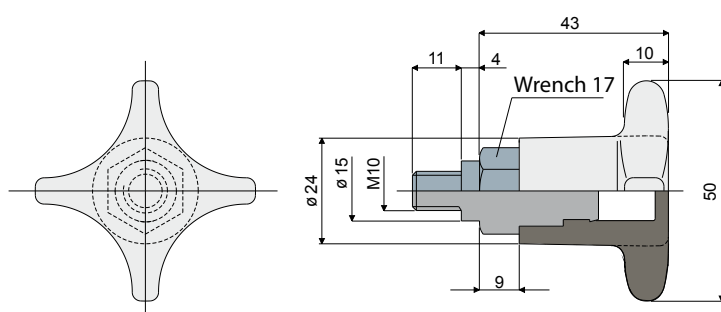

Type	Code
D28	CP000266

MATERIALS: Knob made of reinforced polyamide black colour; threaded bushing made of brass.


FEATURES: Accessories D26, D7 are used with heads D21 and D66, while D28 is used with heads D23.

BOX QUANTITY: 24 pieces.

ON REQUEST:


- Knobs: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Knob for bracket (short type) Type: T13

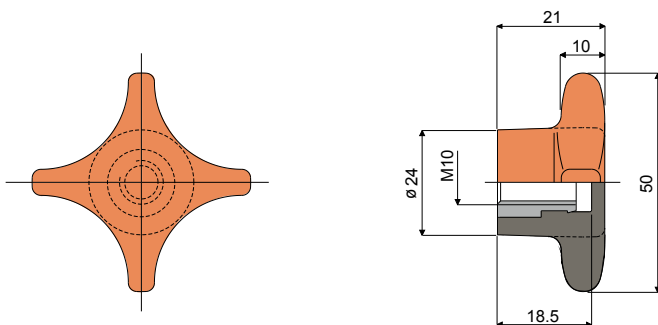


Type	Code
T13	CP000270

Manette de serrage (short type) Type: T14

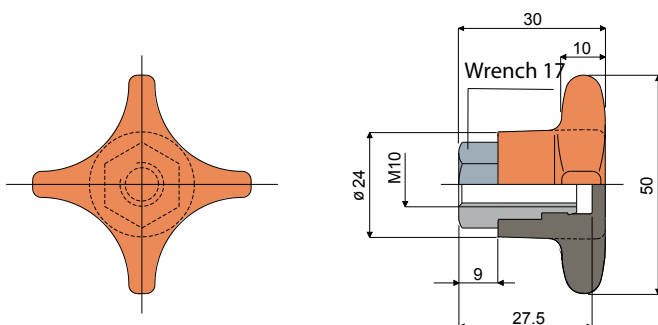

Type	Code
T14	CP000271

Manette de serrage (short type) Type: T15

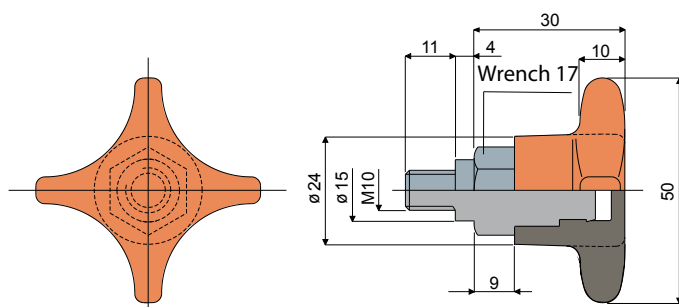

Type	Code
T15	CP000272

MATERIALS: Knob made of reinforced polyamide orange colour; threaded bushing made of nickel plated brass.



FEATURES: Accessories T13, T14 are used with heads D21 and D66, while T15 is used with D23.

BOX QUANTITY: 24 pieces.

ON REQUEST:



- Knobs: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Round handle (ø 44 mm) Type: T34





Type	Code
T34	CP000273

Round handle (ø 44 mm) Type: T37



Type	Code
T37	CP000274

Round handle (ø 44 mm) Type: T38

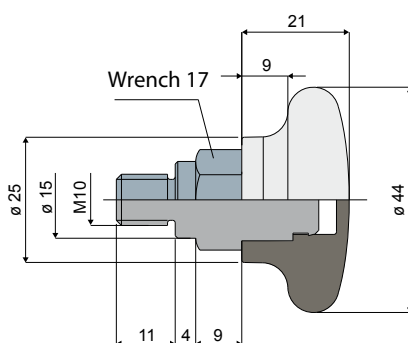

Type	Code
T38	CP000275

MATERIALS: Handle made of reinforced polyamide black colour; threaded bushing made of nickel plated brass.


FEATURES: Accessories T36, T37 are used with heads D21 and D66, while T38 is used with D23.

BOX QUANTITY: 24 pieces.

ON REQUEST:


- Handles: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

"T" handle Type: T03

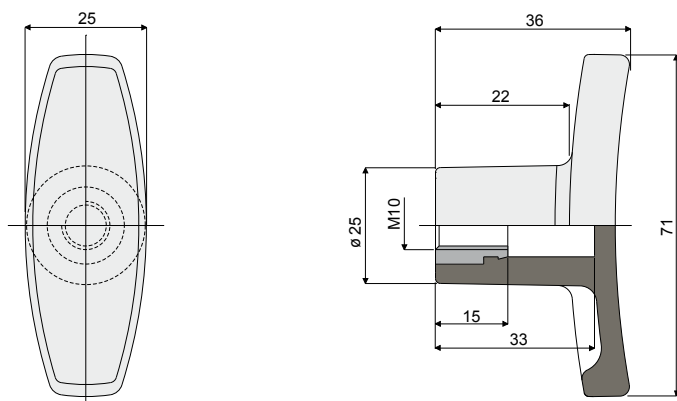


Type	Code
T03	CP000276

"T" handle Type: T04

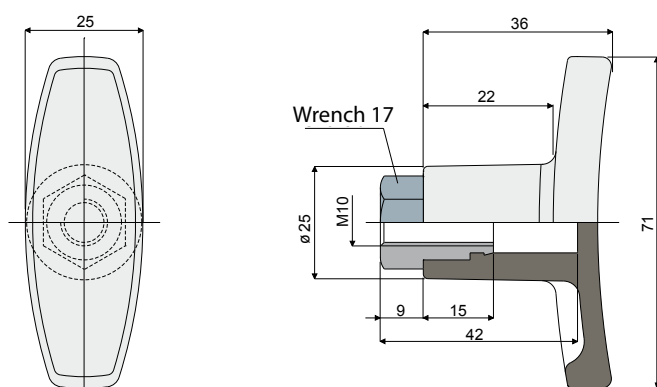

Type	Code
T04	CP000277

"T" handle Type: T05

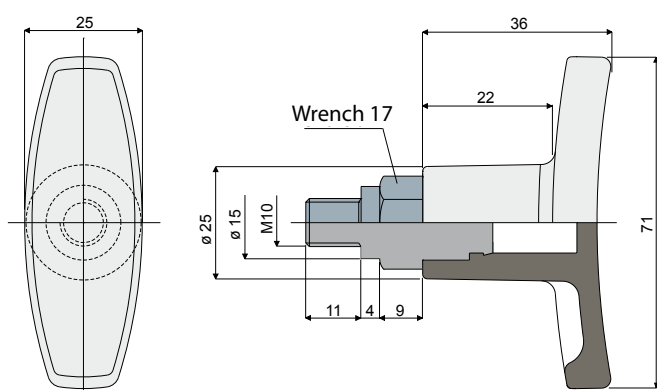


Type	Code
T05	CP000278

MATERIALS: Handle is made of reinforced polyamide black colour; threaded bushing is made of nickel plated brass.


BOX QUANTITY: 24 pieces.

ON REQUEST:


- Handles: made of reinforced polypropylene, other colours.
- Box Quantity: According to your request.

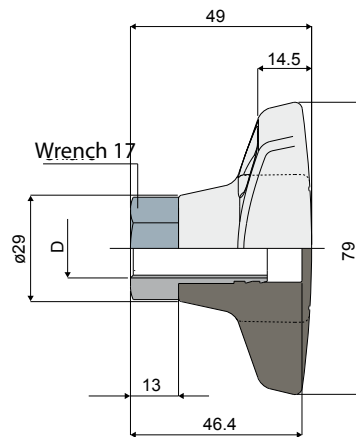

- Knobs: In reinforced polypropylene, other colours, with customized brand.
- Box Quantity: According to your request.


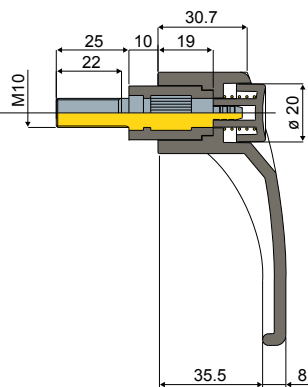


- **Handles:** With threaded inserts M8, M10, M12, with different lengths; also available in stainless steel AISI 304.
- **Box Quantity:** According to your request.

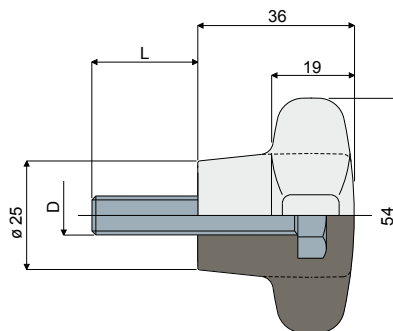



ON REQUEST: • Knobs: made of reinforced polypropylene, in other colours. • Box
Quantity: According to your request.

Hinge Type: D33

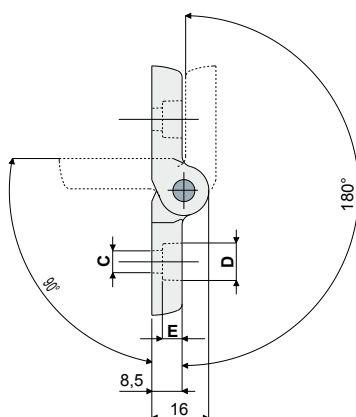

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Type	Code
34	50	5,5	10,5	3,5	34	D33A	CP000284
31	50	5,5	9	5	30	D33B	CP000285
40	70	6,5	10,5	6	30	D33C	CP000286
46	70	6,5	10,5	6	30	D33D	CP000287
46	70	8,5	13,5	5	30	D33E	CP000288

Hinge Type: D34

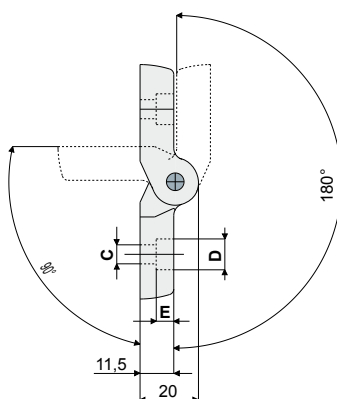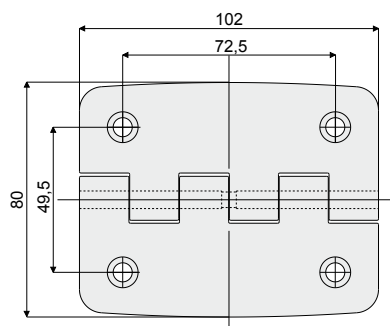

C (mm)	D (mm)	E (mm)	Type	Code
6,5	10,5	6	D34A	CP000289
8,5	13,5	8	D34B	CP000290

MATERIALS: Hinge made of reinforced polyamide black colour; pin made of stainless steel AISI 304.


FEATURES: Maximum rotation 270°

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Hinges: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Idler wheel for chain return Type: D68

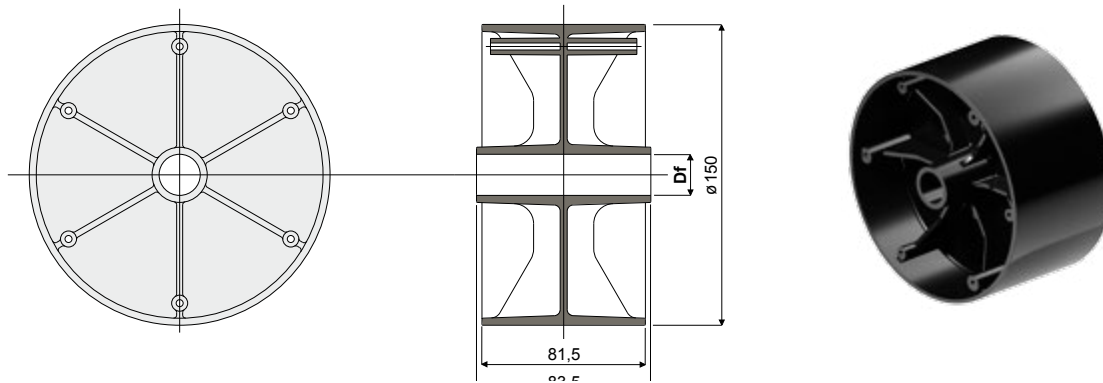

Df Bore for pin of (mm)	Type	Code
20	D68	CP000291

MATERIALS: Wheel in polyamide black colour.


FEATURES: To be assembled in the chain return near to the sprocket.

BOX QUANTITY: 12 pieces.

ON REQUEST:

- Wheels: Other bore sizes, materials and colours.
- Box Quantity: According to your request.

Flange for chain guide (for idler wheel D68) Type: D69

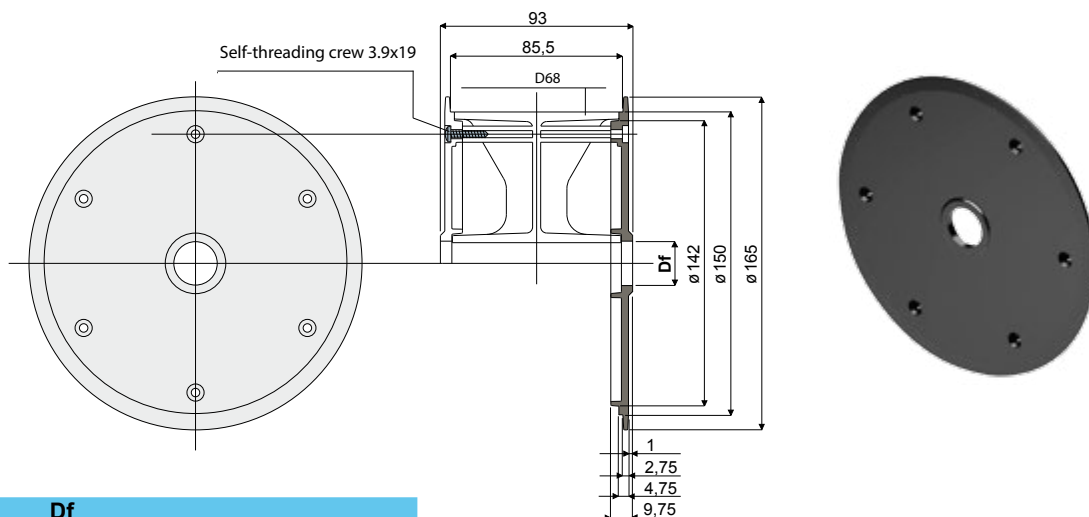

Df Bore for shaft of (mm)	Type	Code
20	D69	CP000292

MATERIALS: Flange is made of polyamide black colour; self-threading screws are made of stainless steel AISI 304.


FEATURES: To be assembled to our idler wheel D68 for chain guide. Supplied complete with blocking screws.

BOX QUANTITY: 24 pieces.

ON REQUEST:


- Flanges: Other bore sizes, materials and colours.
- Box Quantity: According to your request.

Split idler wheel 21 teeth (for chains series 812-815-820-831) Type: T11

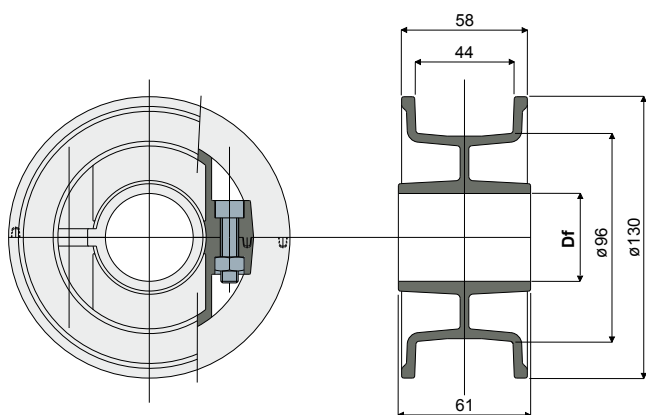

Df Bore for shaft of (mm)	Type	Code
25	T11A	CP000293
30	T11B	CP000294
35	T11C	CP000295
40	T11D	CP000296

Split idler wheel 25 teeth (for chains series 812-815-820-831) Type: D85

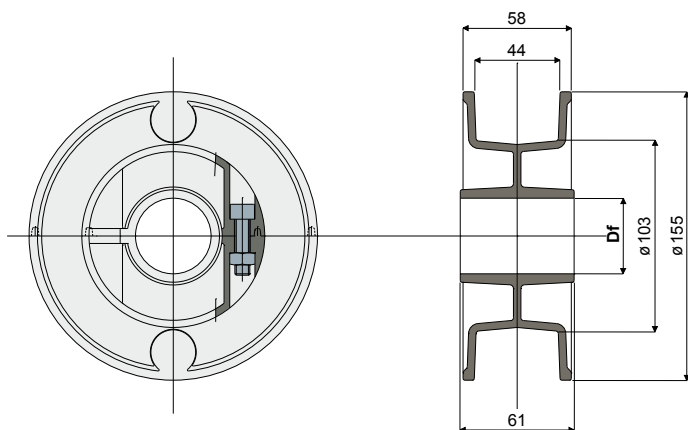

Df Bore for pin of (mm)	Type	Code
25	D85A	CP000297
30	D85B	CP000298
35	D85C	CP000299
40	D85D	CP000300

MATERIALS: Wheel made of polyamide black colour; bolts and nuts made of stainless steel AISI 304.


FEATURES: Supplied assembled. To be used for chain return in the series 812, 815, 820, 831.

BOX QUANTITY: 12 pieces.

ON REQUEST:

- Wheels: With special bores, other colours.
- Box Quantity: According to your request.

Split idler wheel 25 teeth (for chains series 879 Tab, 880 Tab, 881 Tab) Type: T10

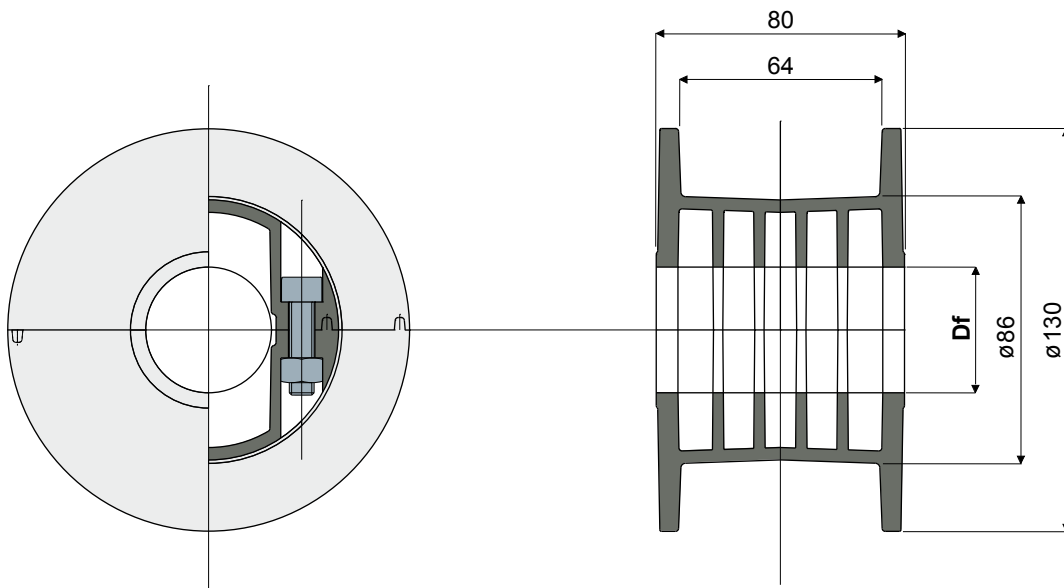

Df Bore for shaft of (mm)	Type	Code
20	T10A	CP000301
25	T10B	CP000302
30	T10C	CP000303
35	T10D	CP000304
40	T10E	CP000305

MATERIALS: Wheel made of polyamide black colour; bolts and nuts made of stainless steel AISI 304.


FEATURES: Supplied assembled. To be used for chain return in series 879 Tab, 880 Tab and 881 Tab.

BOX QUANTITY: 12 pieces.

ON REQUEST:


- Wheels: With special bores, other colours.
- Box Quantity: According to your request.

Bagues d'arret Type: D88

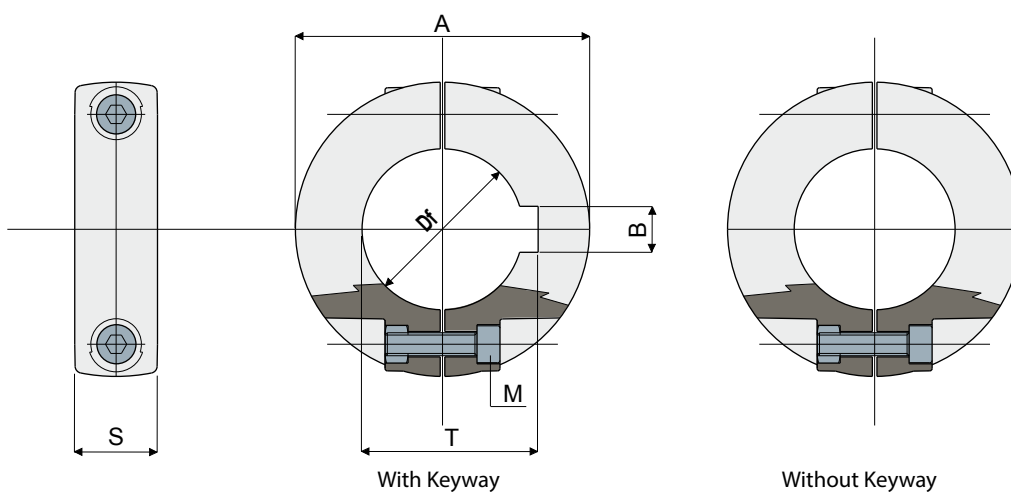


With Keyway							
Df (mm)	A (mm)	S (mm)	M (mm)	B (mm)	T (mm)	Type	Code
20	40	14	M4	6	22,8	D88A	CP000306
25	50	14	M5	8	28,3	D88B	CP000307
30	50	14	M5	8	33,3	D88C	CP000308
35	65	14	M5	10	38,3	D88D	CP000309
40	65	14	M5	12	43,3	D88E	CP000310


Without Keyway					
Df (mm)	A (mm)	S (mm)	M (mm)	Type	Code
12	35	13	M4	D88F	CP000311
14	35	13	M4	D88G	CP000312
16	35	13	M4	D88H	CP000313
18	40	14	M4	D88I	CP000314
20	40	14	M4	D88L	CP000315
25	50	14	M5	D88M	CP000316
30	50	14	M5	D88N	CP000317
35	65	14	M5	D88O	CP000318
40	65	14	M5	D88P	CP000319




Sprockets



Idler wheels



rollers for chain return



guide rail bracket

MATERIALS: Collars made out of reinforced polyamide black colour; bolt and nuts made out of stainless steel AISI 304.


FEATURES: Supplied assembled. To be assembled on the shaft to obtain wheels axial blocking; to be assembled on pins for guides supporting to adjust the position of guides according to the bottle size.

BOX QUANTITY: 96 pieces.

ON REQUEST: • Collars: With special bores, other colours. • Box Quantity: According to your request.


Example of applications

Roller for chain return (with flange) Type: D50

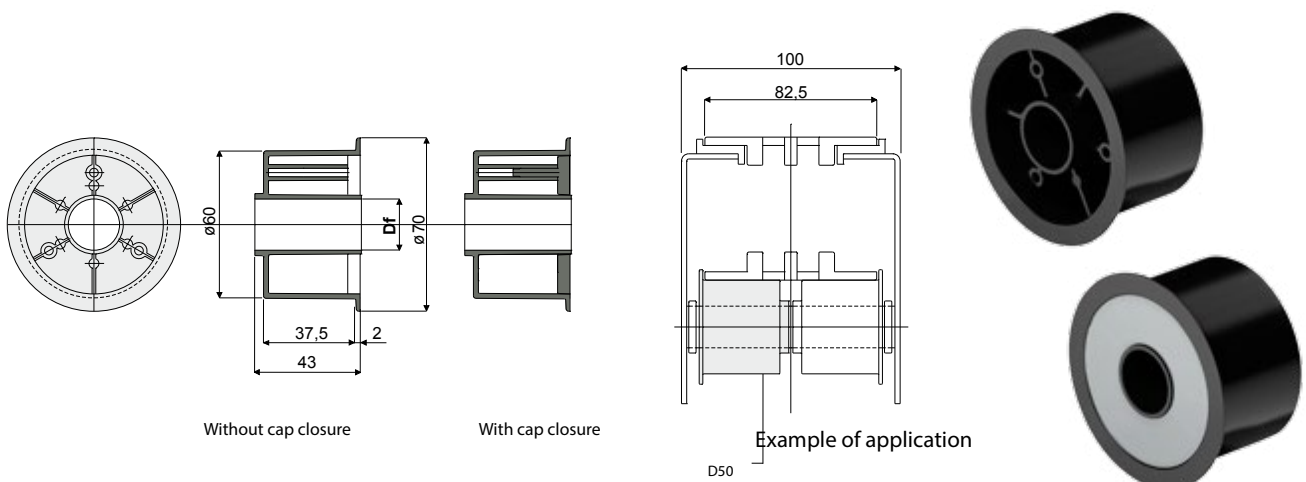

Df Bore for pin of (mm)	Without cap closure		With cap closure	
	Type	Code	Type	Code
15	D50A	CP000320	D50E	CP000324
16	D50B	CP000321	D50F	CP000325
18	D50C	CP000322	D50G	CP000326
20	D50D	CP000323	D50H	CP000327

Roller for chain return (without flange) Type: D51

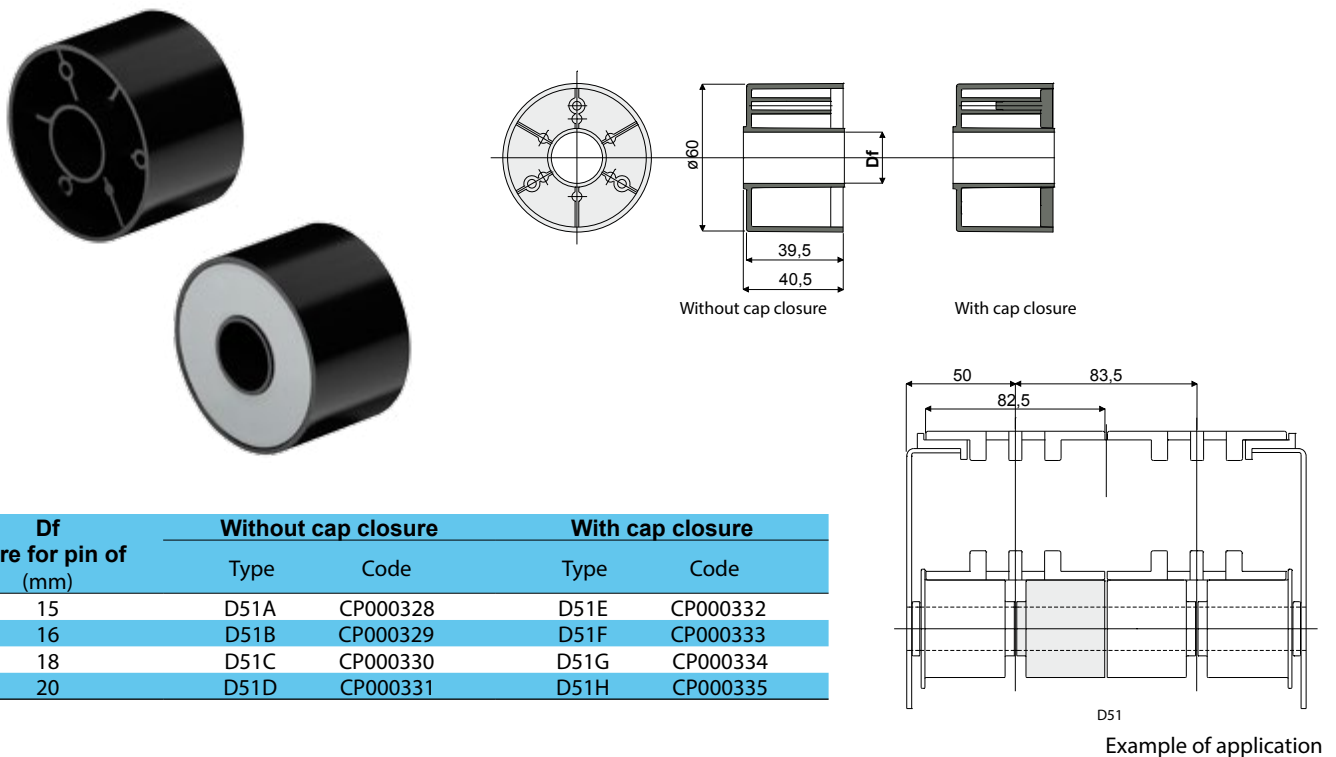

Df Bore for pin of (mm)	Without cap closure		With cap closure	
	Type	Code	Type	Code
15	D51A	CP000328	D51E	CP000332
16	D51B	CP000329	D51F	CP000333
18	D51C	CP000330	D51G	CP000334
20	D51D	CP000331	D51H	CP000335

MATERIALS: Roller made out of polyamide black colour; cap made out of polyamide grey colour.




FEATURES: To be assembled in the chain return.

BOX QUANTITY: 96 pieces.

ON REQUEST:


- Rollers: Special bores, other colours.
- Box Quantity: According to your request.

Roller for chain return (with flange) Type: D52



With cap closure




Without cap closure

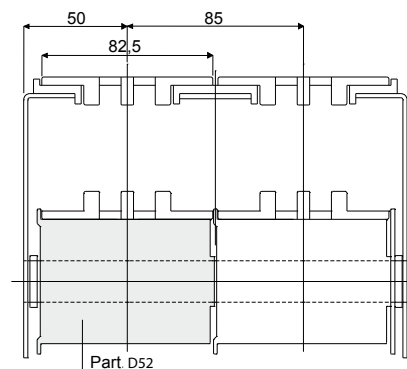

Example of application

Df Bore for pin of (mm)	Without cap closure		With cap closure	
	Type	Code	Type	Code
12	D52A	CP000336	D52I	CP000344
14	D52B	CP000337	D52L	CP000345
15	D52C	CP000338	D52M	CP000346
16	D52D	CP000339	D52N	CP000347
18	D52E	CP000340	D52O	CP000348
20	D52F	CP000341	D52P	CP000349
25	D52G	CP000342	-	-
30	D52H	CP000343	-	-


Roller for chain return (with double flange) Type: D96



With cap closure

Without cap closure

Example of application

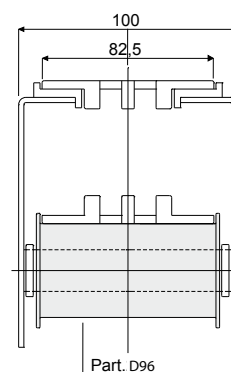

Df Bore for pin of (mm)	Without cap closure		With cap closure	
	Type	Code	Type	Code
12	D96A	CP000350	D96G	CP000356
14	D96B	CP000351	D96H	CP000357
15	D96C	CP000352	D96I	CP000358
16	D96D	CP000353	D96L	CP000359
18	D96E	CP000354	D96M	CP000360
20	D96F	CP000355	D96N	CP000361

MATERIALS: Roller made out of polyamide black colour; cap made out of polyamide grey colour.


FEATURES: To be assembled in the chain return.

BOX QUANTITY: 48 pieces.

ON REQUEST:


- Rollers: Special bores, other colours.
- Box Quantity: According to your request.

Roller for chain return (without flange) Type: D53

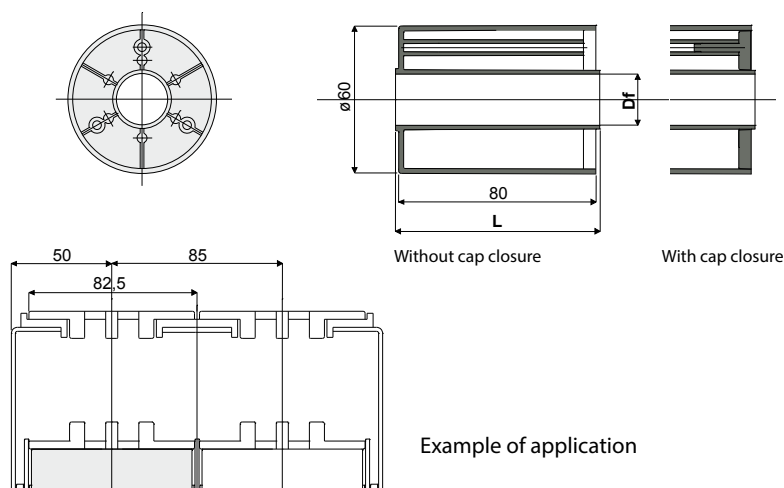

Df Bore for pin of (mm)	Without cap closure				With cap closure			
	L = 82 mm		L = 84 mm		L = 82 mm		L = 84 mm	
	Type	Code	Type	Code	Type	Code	Type	Code
12	D53A	CP000362	D53G	CP000368	D53Q	CP000376	D53Z	CP000382
14	D53B	CP000363	D53H	CP000369	D53R	CP000377	D53W	CP000383
15	D53C	CP000364	D53I	CP000370	D53S	CP000378	D53X	CP000384
16	D53D	CP000365	D53L	CP000371	D53T	CP000379	D53Y	CP000385
18	D53E	CP000366	D53M	CP000372	D53U	CP000380	D53J	CP000386
20	D53F	CP000367	D53N	CP000373	D53V	CP000381	D53K	CP000387
25	-	-	D53O	CP000374	-	-	-	-
30	-	-	D53P	CP000375	-	-	-	-

Roller for chain return (with flange) Type: D70

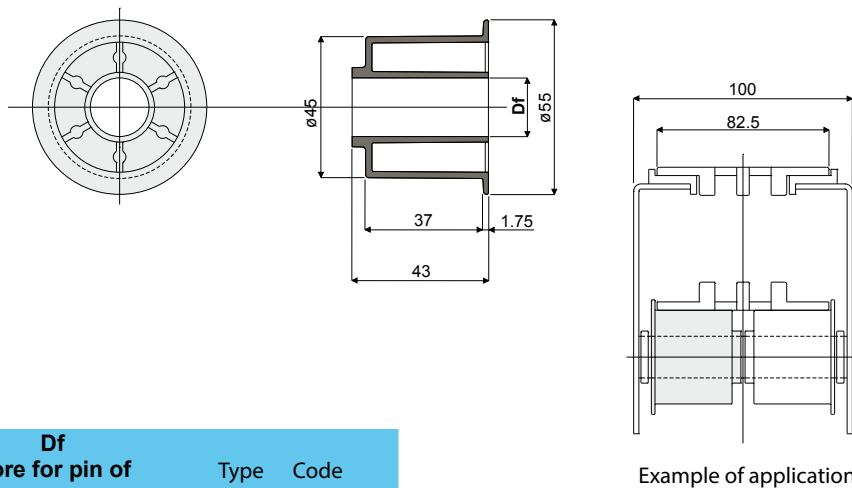

Df Bore for pin of (mm)	Type	Code
15	D70A	CP000388
20	D70B	CP000389

MATERIALS: Roller made out of polyamide black colour; cap made out of polyamide grey colour.


FEATURES: To be assembled in the chain return.

BOX QUANTITY: D53: 48 pieces. D70: 96 pieces.

ON REQUEST:

- Rollers: Special bores, other colours.
- Box Quantity: According to your request.


Roller for chain return (without flange) Type: D71

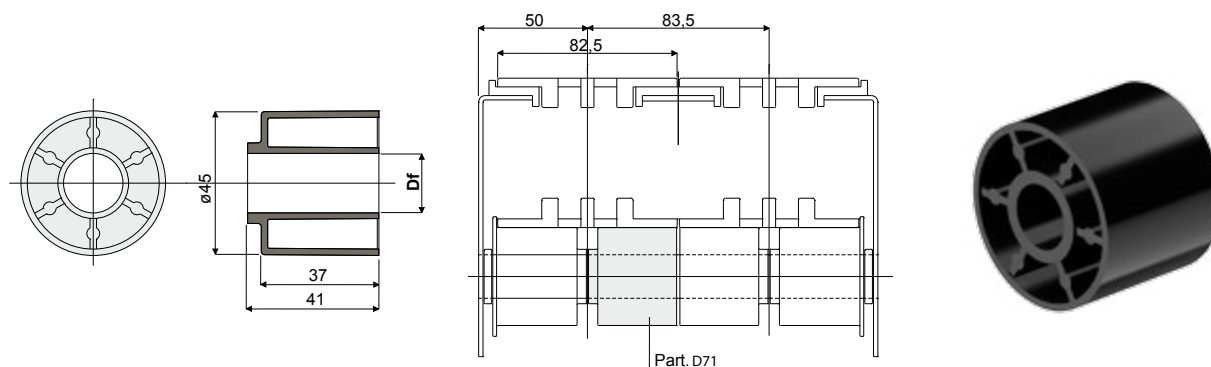

Example of application

Df Bore for pin of (mm)	Type	Code
15	D71A	CP000390
20	D71B	CP000391

Roller for chain return (with flange) Type: D73

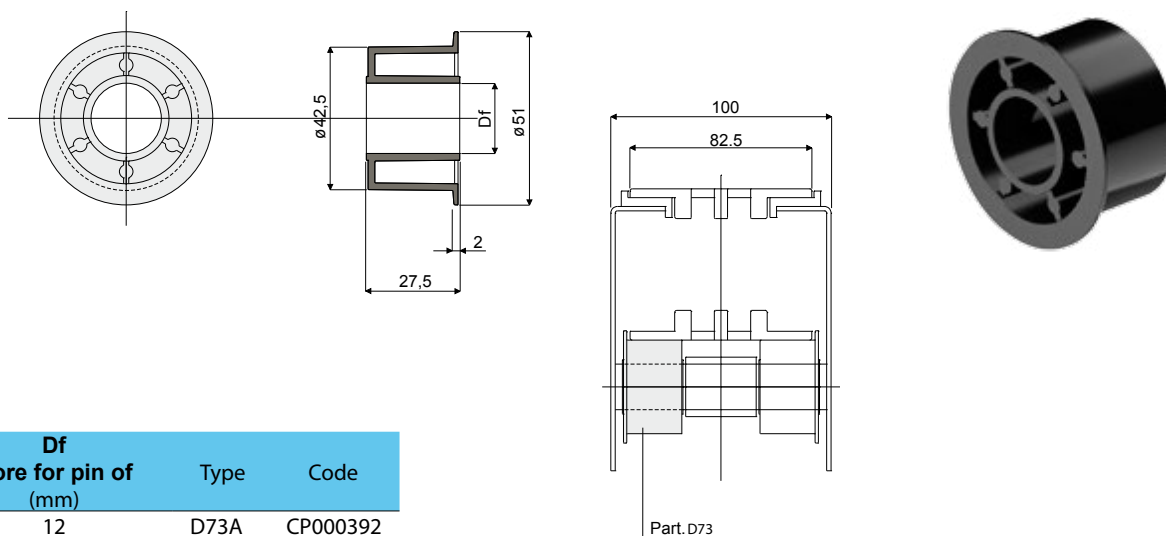

Example of application

Df Bore for pin of (mm)	Type	Code
12	D73A	CP000392
16	D73B	CP000393
18	D73C	CP000394
20	D73D	CP000395

MATERIALS: Roller made of polyamide black colour.



FEATURES: To be assembled in the chain return.

BOX QUANTITY: 96 pieces.


ON REQUEST:

- Rollers: Special bores, other colours.
- Box Quantity: According to your request.

Double roller for chain return (with central flange) Type: D74





Df Bore for pin of (mm)	Type	Code
12	D74A	CP000396
16	D74B	CP000397
18	D74C	CP000398
20	D74D	CP000399

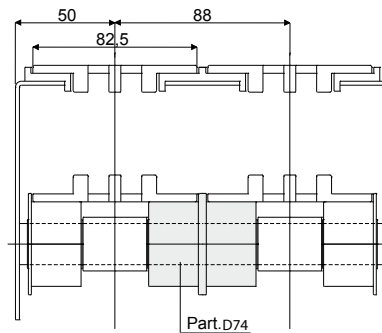


Example of application

Double roller for chain return (with central flange) Type: D87



Df Bore for pin of (mm)	Type	Code
12	D87A	CP000400
16	D87B	CP000401
18	D87C	CP000402
20	D87D	CP000403

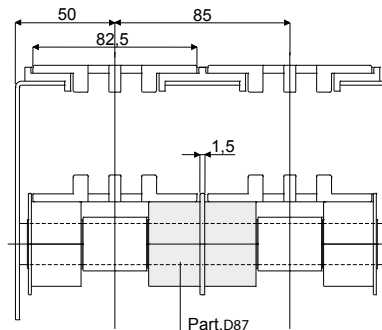

Example of application

MATERIALS: Roller made of polyamide black colour.


FEATURES: To be assembled in the chain return.

BOX QUANTITY: 96 pieces.


ON REQUEST:

- Rollers: Special bores, other colours.
- Box Quantity: According to your request.

Double roller for chain return (without central flange) Type: D86

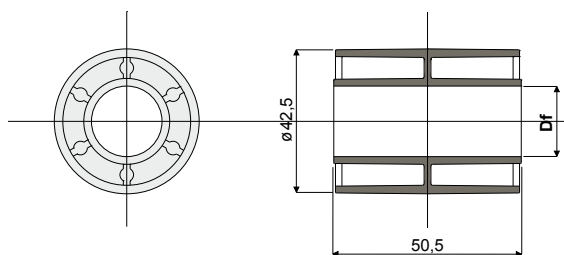


Df Bore for pin of (mm)	Type	Code
12	D86A	CP000404
16	D86B	CP000405
18	D86C	CP000406
20	D86D	CP000407

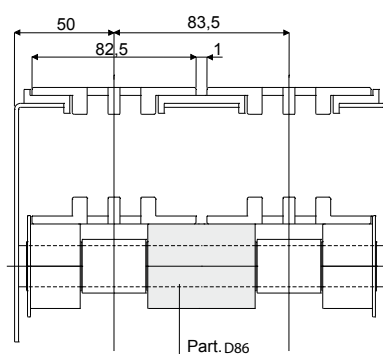


Example of application

Spacer for rollers for chain return Type: D75

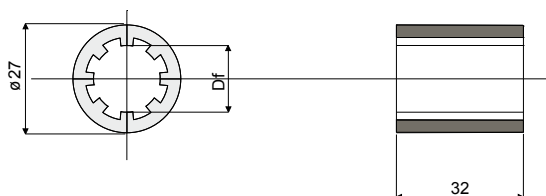

Df Bore for pin of (mm)	Type	Code
12	D75A	CP000408
16	D75B	CP000409
18	D75C	CP000410
20	D75D	CP000411

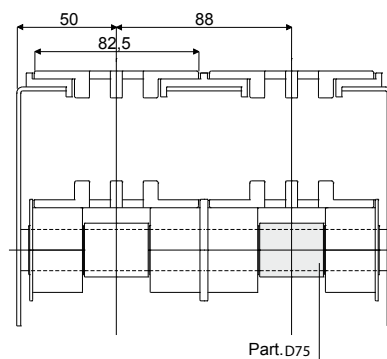

Example of application

MATERIALS: Roller made of polyamide black colour.


FEATURES: D86 is used in the chain return, while D75 is used like roller's spacer.

BOX QUANTITY: 96 pieces.

ON REQUEST:

- Rollers: Special bores, other colours.
- Box Quantity: According to your request.

Spacer for rollers for chain return Type: D72

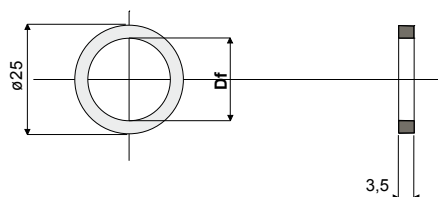

Df Bore for pin of (mm)	Type	Code
15	D72A	CP000412
20	D72B	CP000413


MATERIALS: Spacer made of polyamide black colour.

FEATURES: To be assembled in the chain return.

BOX QUANTITY: 96 pieces.

ON REQUEST:




- Spacers: Special bores, other colours.
- Box Quantity: According to your request.

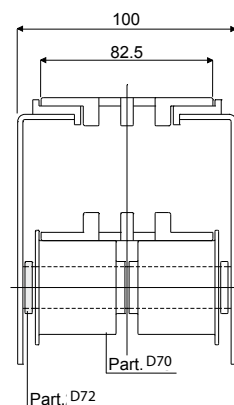

Example of application



Self-adjusting sliding shoe for chain return Type: D67

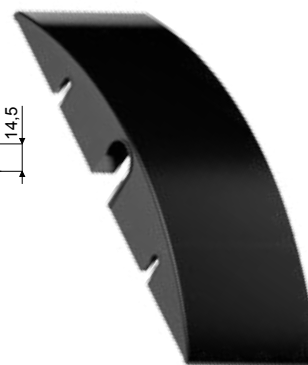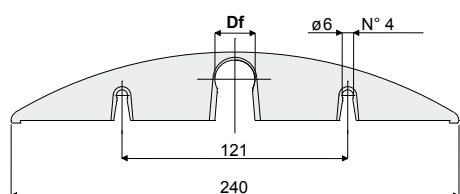

Df Bore for pin of (mm)	Polyamide (black colour)		Polyethylene (green colour)	
	Type	Code	Type	Code
18	D67A	CP000414	D67C	CP000416
20	D67B	CP000415	D67D	CP000417

MATERIALS: Sliding shoe is made of polyamide black colour or of polyethylene green colour.



FEATURES: To be assembled in the chain return near to the sprocket. Snap-on assembly.

BOX QUANTITY: 12 pieces.

ON REQUEST:

- Sliding shoes: Other bore sizes, and colours.
- Box Quantity: According to your request.



Roller with rubber for chain return (with flange) Type: D49

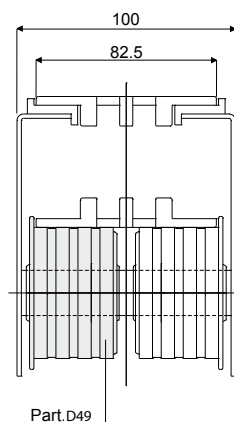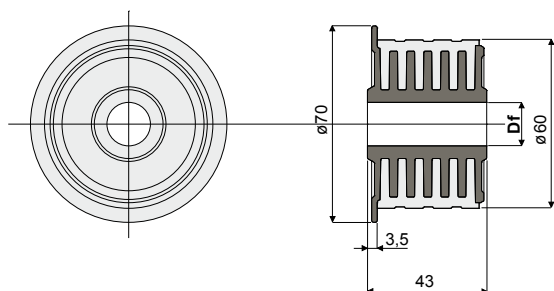

Example of application

Df Bore for pin of (mm)	Type	Code
15	D49A	CP000418
16	D49B	CP000419
18	D49C	CP000420
20	D49D	CP000421

Roller with rubber for chain return (without flange) Type: D45

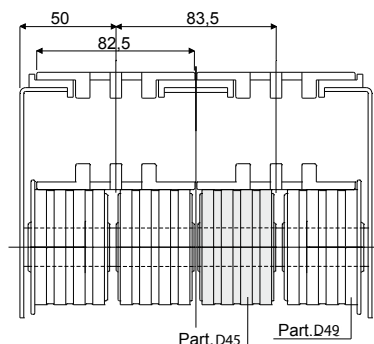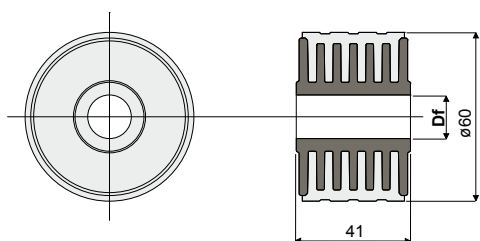

Example of application

Df Bore for pin of (mm)	Type	Code
15	D45A	CP000422
16	D45B	CP000423
18	D45C	CP000424
20	D45D	CP000425

MATERIALS: Internal part is made of polyamide black colour; external rubber is made of PVC grey colour 65 shore.


FEATURES: This roller is completely closed, total lack of internal cavities to obtain the maximum level of cleanability and noiselessness during working operations.

BOX QUANTITY: 48 pieces.

ON REQUEST:

- Rollers: Special bores, other colours.
- Box Quantity: According to your request.


Roller with rubber for chain return (without flange) Type: D93

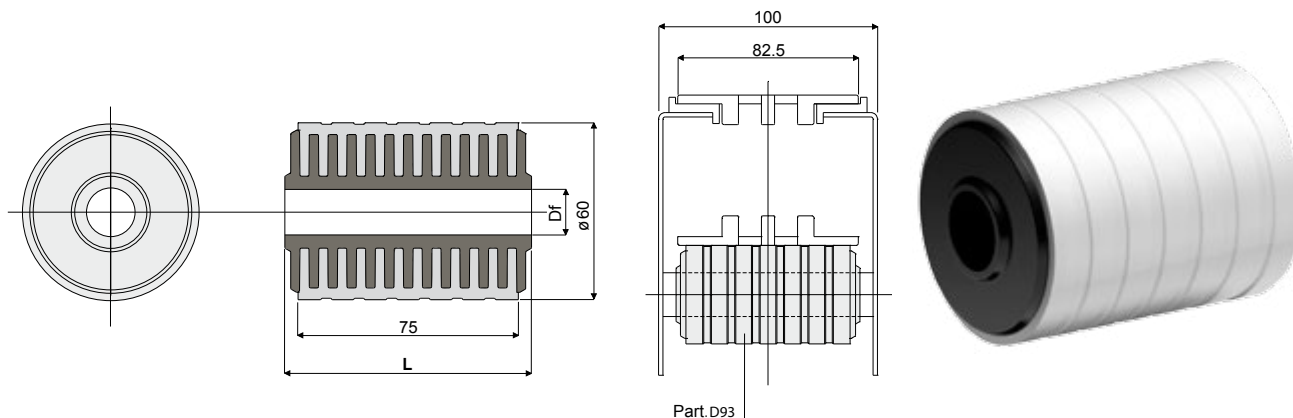

Example of application

Df Bore for pin of (mm)	L = 82 mm		L = 84 mm	
	Type	Code	Type	Code
12	D93A	CP000426	D93G	CP000431
15	D93B	CP000427	D93H	CP000432
16	D93C	CP000428	D93I	CP000433
18	D93D	CP000429	D93L	CP000434
20	D93E	CP000430	D93M	CP000435

Roller with rubber for chain return (without flange) Type: D76

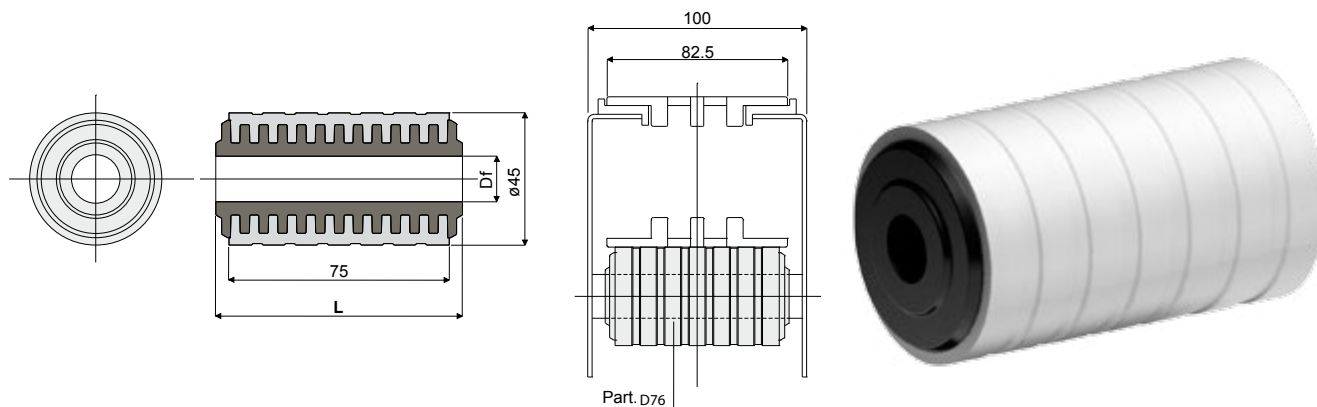

Example of application

Df Bore for pin of (mm)	L = 82 mm		L = 84 mm	
	Type	Code	Type	Code
12	D76A	CP000436	D76G	CP000441
15	D76B	CP000437	D76H	CP000442
16	D76C	CP000438	D76I	CP000443
18	D76D	CP000439	D76L	CP000444
20	D76E	CP000440	D76M	CP000445

MATERIALS: Internal part is made of polyamide black colour; external rubber is made of PVC grey colour 65 shore.



FEATURES: This roller is completely closed, total lack of internal cavities to obtain the maximum level of cleanability and noiselessness during working operations.

BOX QUANTITY: 48 pieces.

ON REQUEST:

- Rollers: Special bores, other colours.
- Box Quantity: According to your request.

Flange for chain guide (for roller D51, D52, D53, D45, D93, D50, D49) Type: D54

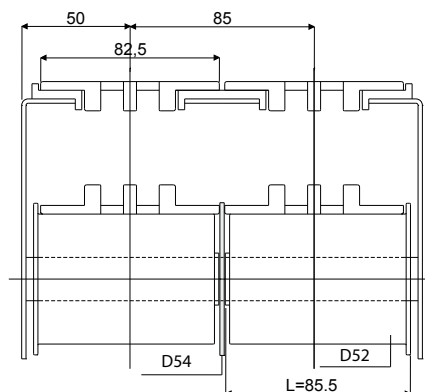
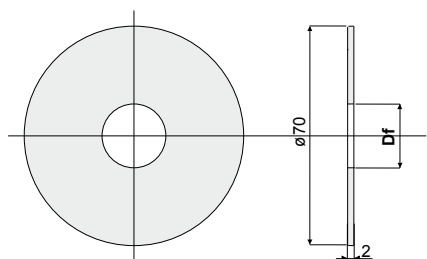


Example of application



Df Bore for pin of (mm)	Type	Code
12	D54A	CP000446
14	D54B	CP000447
15	D54C	CP000448
16	D54E	CP000449
18	D54F	CP000450
20	D54G	CP000451

Flange for chain guide (for roller D76, D71, D70) Type: D82

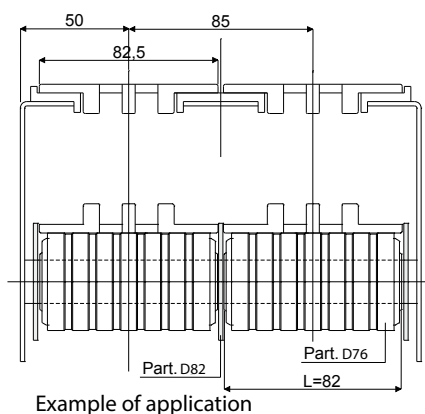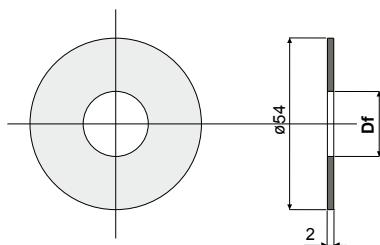

Example of application



Df Bore for pin of (mm)	Type	Code
15	D82A	CP000452
16	D82B	CP000453
18	D82C	CP000454
20	D82E	CP000455

MATERIALS: Flange is made of polypropylene black colour.


FEATURES: D54 is assembled to our roller for chain return D51, D52, D53, D45, D93, D50, D49. D82 is assembled to rollers D76, D71 and D70.

BOX QUANTITY: 96 pieces.

ON REQUEST:


- Flanges: Special bores, other colours.
- Box Quantity: According to your request.

Threaded bushings (for conveyor flanks) Type: T36

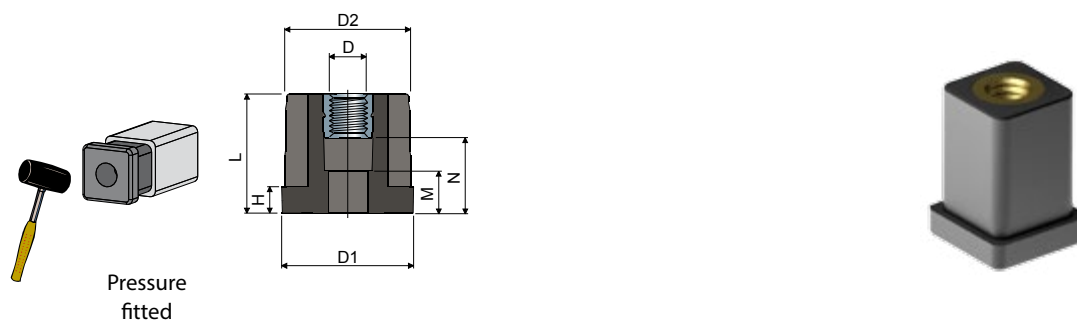


Dimensions du tube										Type	Code
Externe	Épaisseur	Interne	Filetage	D1	D2	H	L	M	N		
(mm)	(mm)	(mm)	D	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		
20x20	1,5	17x17	M8	20x20	17x17	5	28	13	18	T36	CP000456

Embouts filetés (pour le côté du convoyeur) Type: T35

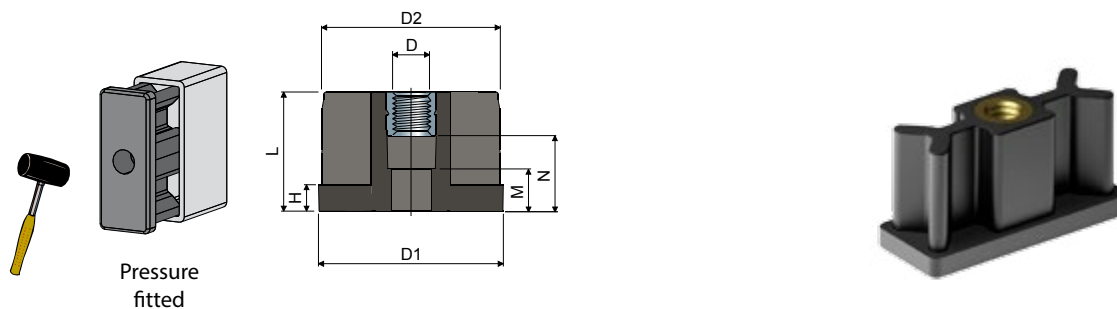

Tube dimensions										Type	Code
Outside	Thickness	Inside	Thread	D1	D2	H	L	M	N		
(mm)	(mm)	(mm)	D	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		
20x50	2	16x46	M8	20x50	16x46	5	28	13	18	T35	CP000457

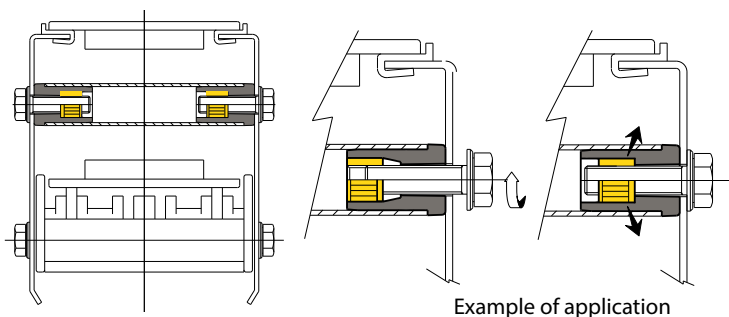

MATERIALS: Bush in reinforced polyamide black colour; threaded insert in brass.



FEATURES: Supplied assembled. To be assembled in the conveyor flanks.

BOX QUANTITY: 48 pieces.


ON REQUEST:

- Bushes: Special thickness tube.
- Box Quantity: According to your request.

Expansion plugs Type: D83

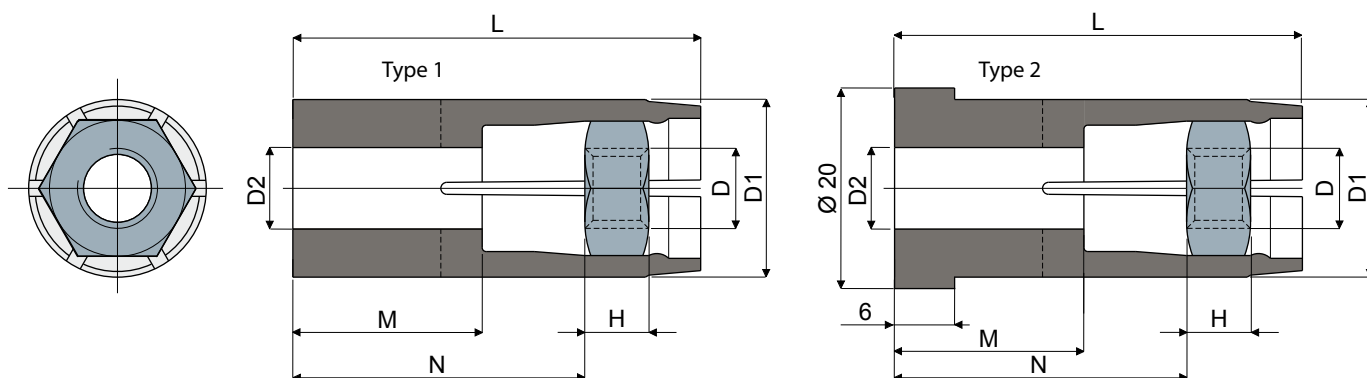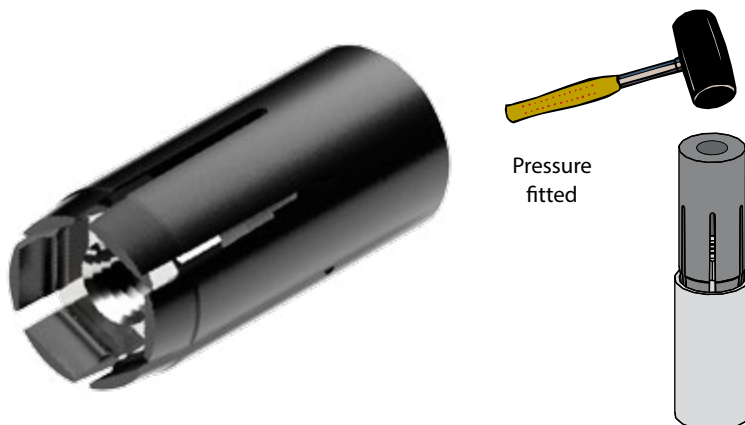

Example of application

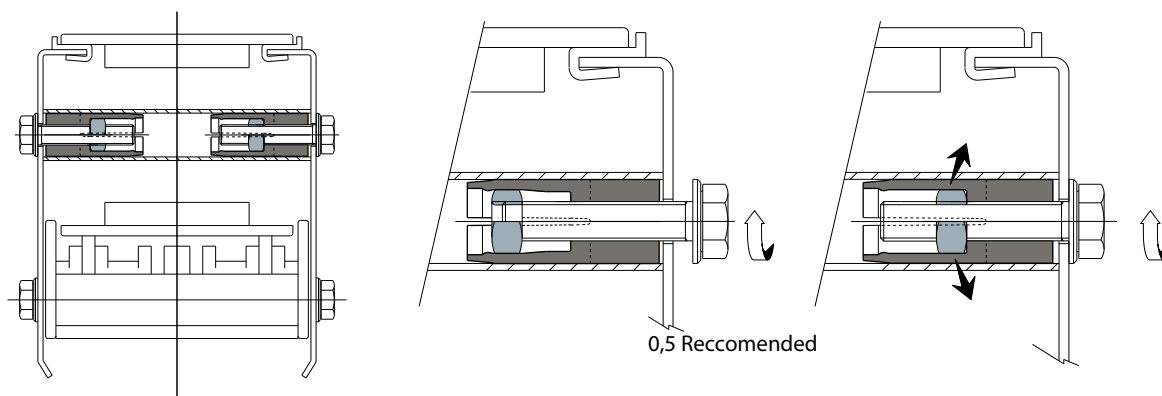

Tube dimensions										Type 1	
Outside (mm)	Thickness (mm)	Inside (mm)	D (mm)	D1 (mm)	D2 (mm)	H (mm)	L (mm)	M (mm)	N (mm)	Type	Code
20	1,5	17	M8	17	8,5	6,5	40	18	28	D83A	CP000458
25	1,5	22	M10	22	10,5	8	51	23	36	D83B	CP000459

Tube dimensions										Type 2	
Outside (mm)	Thickness (mm)	Inside (mm)	D (mm)	D1 (mm)	D2 (mm)	H (mm)	L (mm)	M (mm)	N (mm)	Type	Code
20	1,5	17	M8	17	8,5	6,5	40	19	29	D83C	CP000460

MATERIALS: Bush in reinforced polyamide black colour; threaded insert in brass.








FEATURES: Supplied assembled. To be assembled in the conveyor flanks.

BOX QUANTITY: 48 pieces.

ON REQUEST:

- Bushes: Special thickness tube.
- Box Quantity: According to your request.

Bushing for eyebolt Type: T33

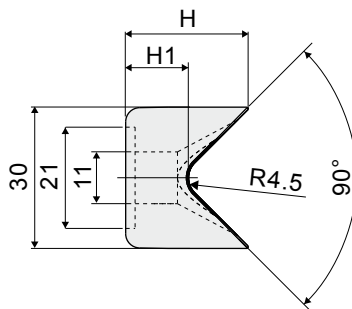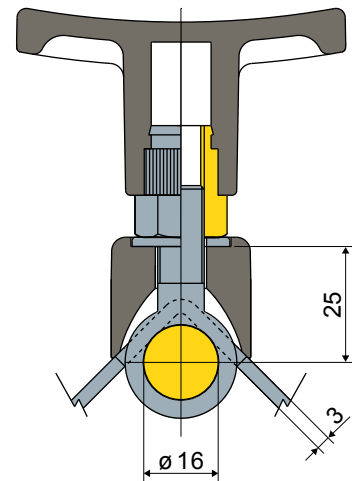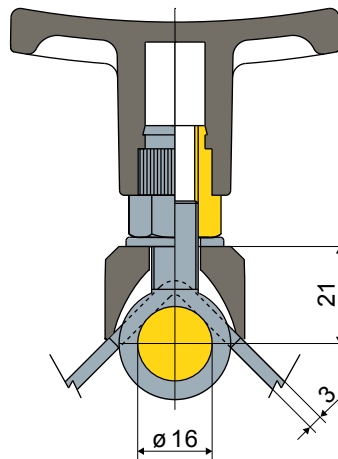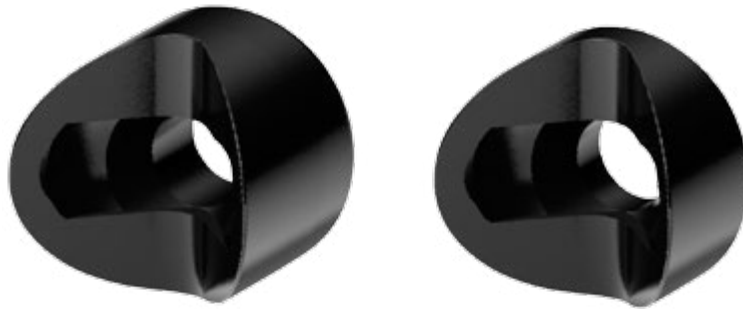

H	H1	Low type	
(mm)	(mm)	Type	Code
20	7,3	T33A	CP000461

H	H1	High type	
(mm)	(mm)	Type	Code
26	13,3	T33B	CP000462


MATERIALS: Bushing made of reinforced polyamide black colour.

FEATURES: To be used with the eyebolts to block the pins holding the transport guides.

BOX QUANTITY: 24 pieces.


ON REQUEST:

- Bushings: With different heights, in reinforced polypropylene, other colours.
- Box Quantity: According to your request.

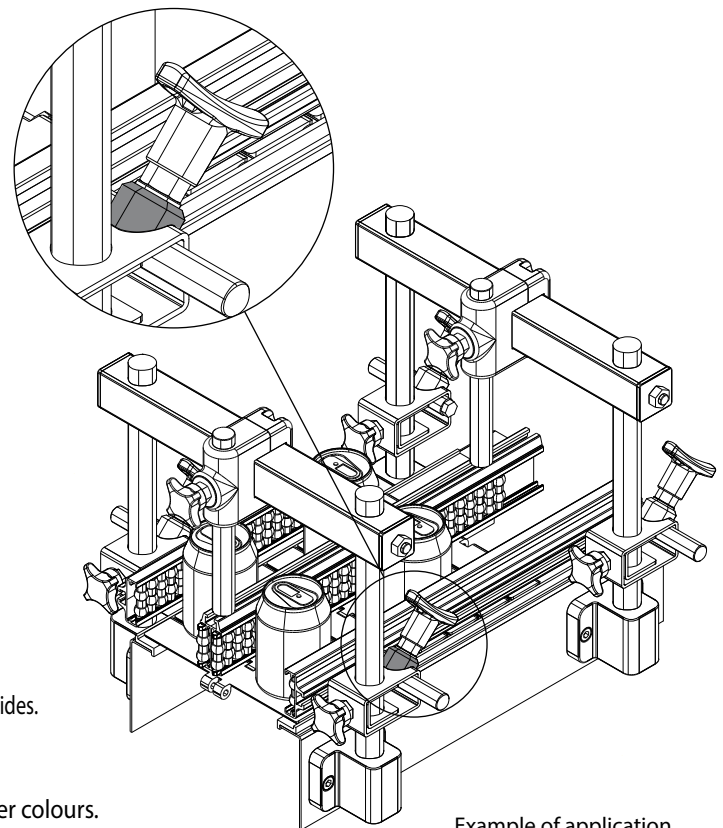

Example of application

Bearing-holder flange Type: T00

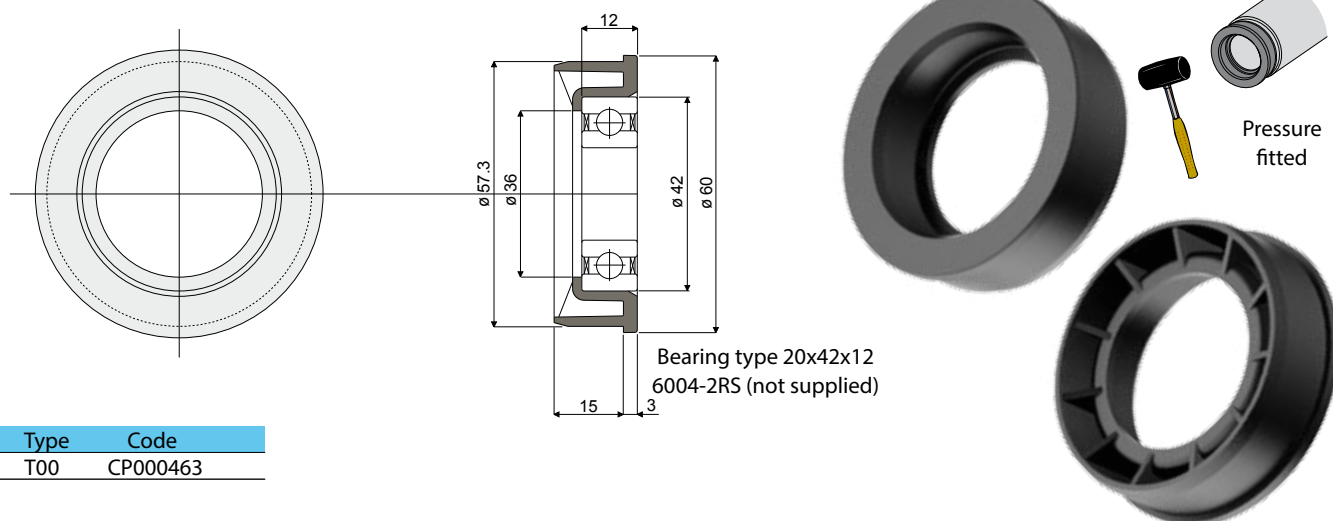

MATERIALS: Flange is made of polyamide black colour.


FEATURES: To be inserted in the tube sides $D=60,3$ thickness 1,5 mm to build a roller conveyor or rollers for chain return. Supplied without bearing.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Flanges: Supplied assembled with bearings.
- Box Quantity: According to your request.

14 teeth sprocket (for bearing support D64) Type: D65

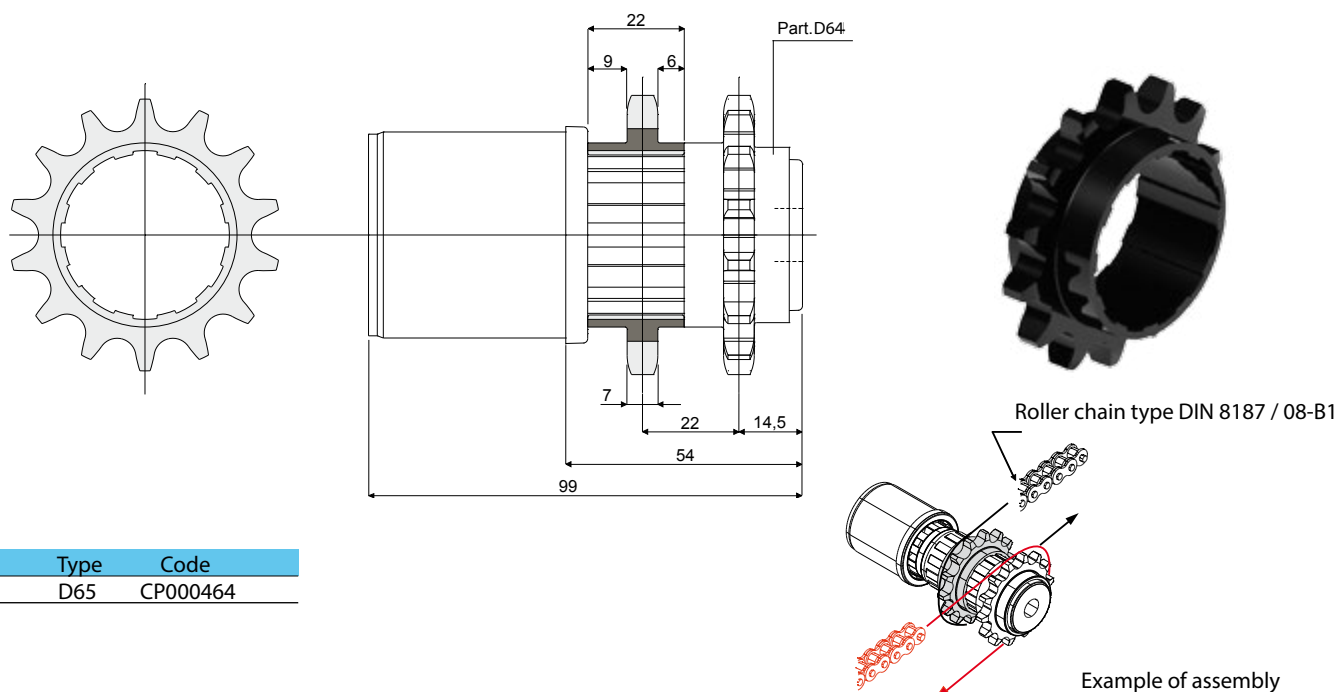

MATERIALS: Drive sprocket is made of polyamide black colour.


FEATURES: Accessory to be used with bearing support D64 to make the drive roller to roller. This drive type allows a greater torque.

BOX QUANTITY: 24 pieces.

ON REQUEST:


- Sprockets: other colours.
- Box Quantity: According to your request.

Bearing support for conveyor rollers (for idler roller) Type: D63

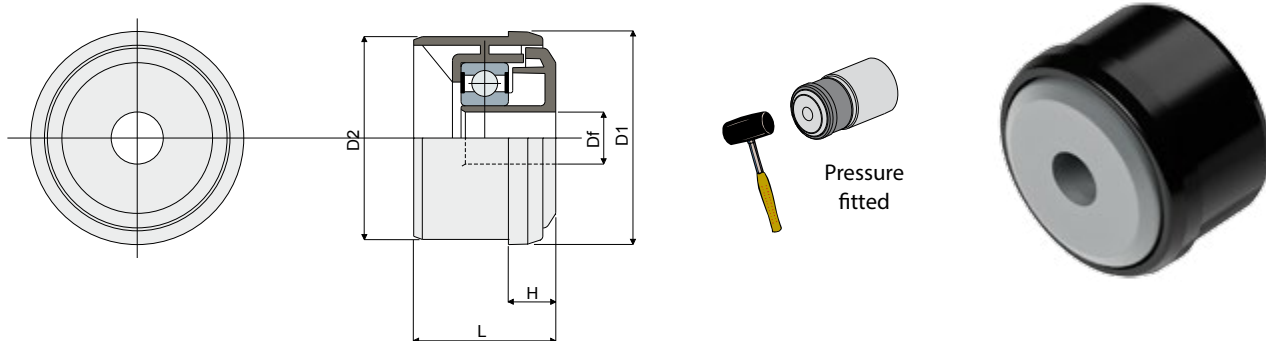

Tube dimensions							Bore for pin of	Type	Code	Bearing type
ø outside	Thickness	ø inside	D1	D2	H	L	Df			
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)			
50	1,5	47	50	47	11	30	12	D63A	CP000465	6202-2RS
50	1,5	47	50	47	11	30	14	D63B	CP000466	6202-2RS

Bearing support for conveyor rollers (with protective shield) Type: T17

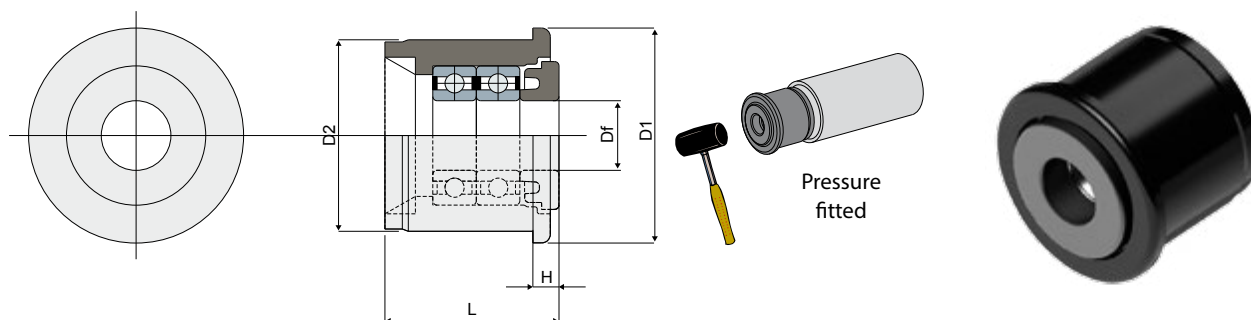

tube dimensions							Bore for pin of	Type	Code	Bearing type
ø outside	Thickness	ø inside	D1	D2	H	L	Df			
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)			
25	1,5	22	25	22	3	20	8	T17A	CP000467	688/8-2RS
25	1.5	22	25	22	3	20	8	T17B	CP000468	Fourni sans roulements

MATERIALS: Bearing support with internal part and external bushing made of polyamide black colour; bearing made of chrome steel.


FEATURES: To be inserted in the tube sides to build a roller conveyor.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Bearing supports: other colours.
- Box Quantity: According to your request.

Bearing support for conveyor rollers (for drive roller) Type: D64

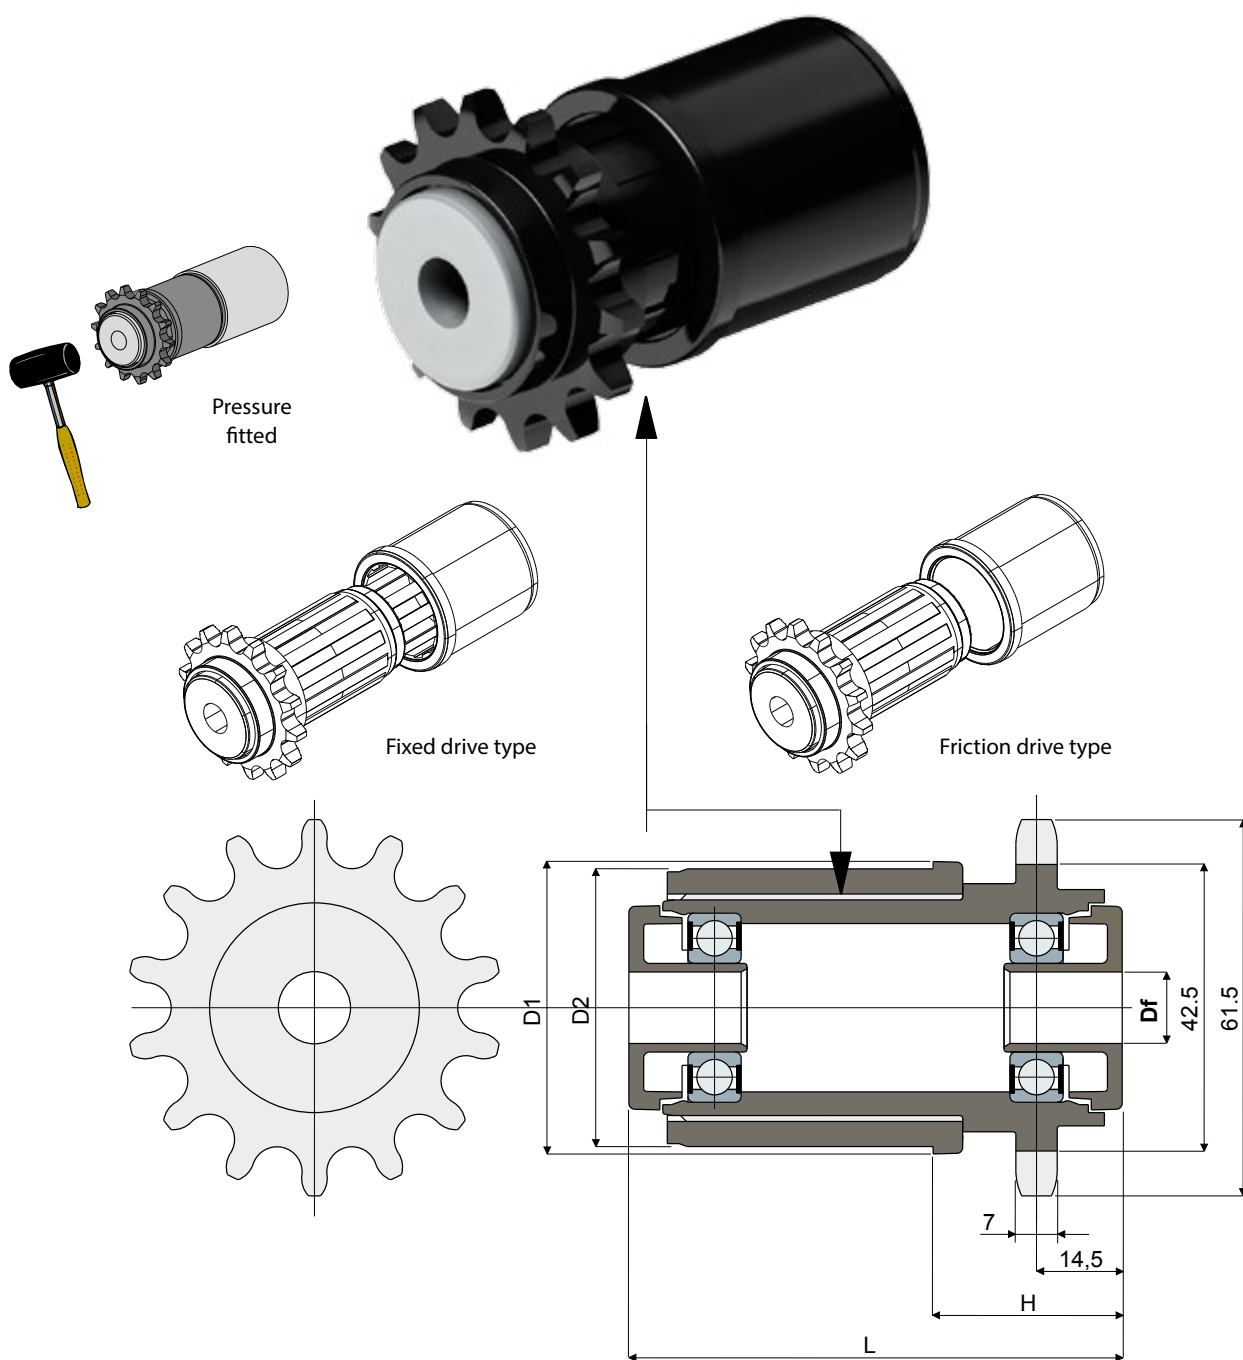

Tube dimensions							Bore for pin of	Fixed drive type		Friction drive type		Bearing type
ø outside (mm)	Thickness (mm)	ø inside (mm)	D1 (mm)	D2 (mm)	H (mm)	L (mm)	Df (mm)	Type	Code	Type	Code	
50	1,5	47	50	47	32	83	12	D64A	CP000469	D64C	CP000471	6002-2RS
50	1,5	47	50	47	32	83	14	D64B	CP000470	D64D	CP000472	6002-2RS

MATERIALS: Bearing support with protective shield made of polyamide grey colour; external bushing made of polyamide black colour; bearing made of chrome steel.




FEATURES: To be inserted in the tube sides to build a roller conveyor. Drive sprocket with 14 teeth for roller chain type DIN 8187-08-b1.

BOX QUANTITY: 24 pieces.

ON REQUEST:



- Bearing supports: other colours, bores with different sizes.
- Box Quantity: According to your request.

Modular transfer plates with rollers (width 115 mm 5 rows of rollers) Type: D57

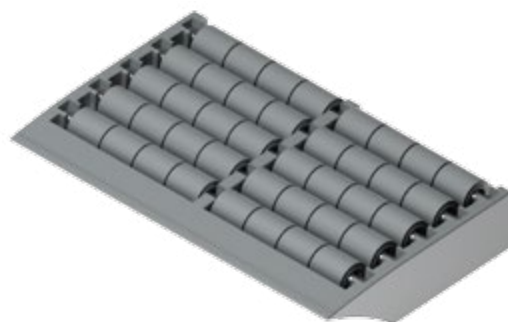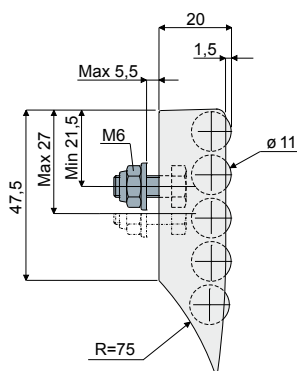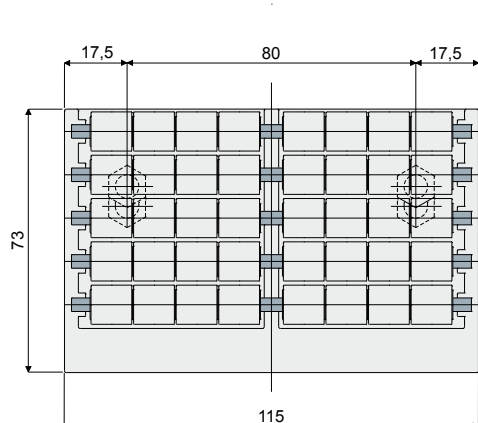



Type	Code
D57	CP000473

Modular transfer plates with rollers (width 115 mm 3 rows of rollers) Type: D58

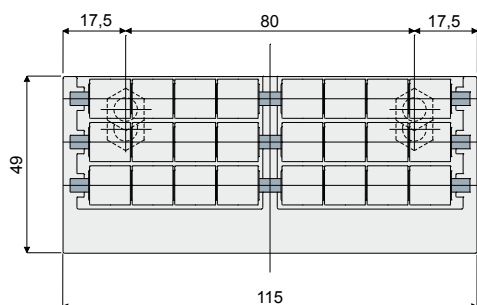

Type	Code
D58	CP000474

Modular transfer plates with rollers (width 115 mm 2 rows of rollers) Type: D59

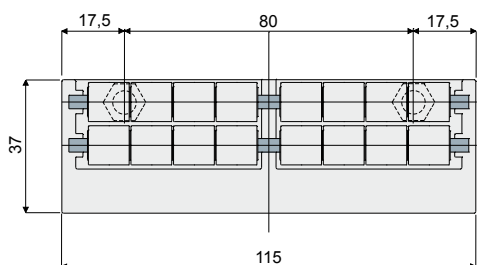

Type	Code
D59	CP000475

MATERIALS: Modular transfer plate with external module and rollers made of acetal grey colour; pins and fixing bolts and nuts made of stainless steel AISI 304.



FEATURES: To be assembled at the end of your conveyor to help the products transfer. Easy to assemble, low friction coefficient, minimum noise level, extremely cleanable.

BOX QUANTITY: 8 pieces.

ON REQUEST:



- External module and rollers: Can be produced in other colours.

Modular transfer plates with rollers (width 85 mm 5 rows of rollers) Type: D60

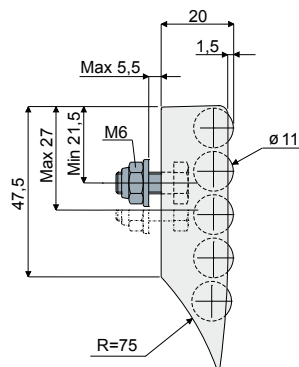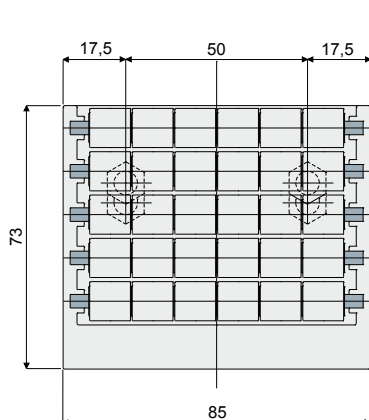



Type	Code
D60	CP000476

Modular transfer plates with rollers (width 85 mm 3 rows of rollers) Type: D61

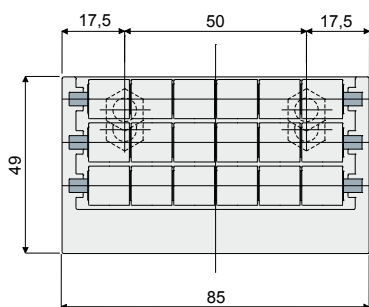

Type	Code
D61	CP000477

Modular transfer plates with rollers (width 85 mm 2 rows of rollers) Type: D62

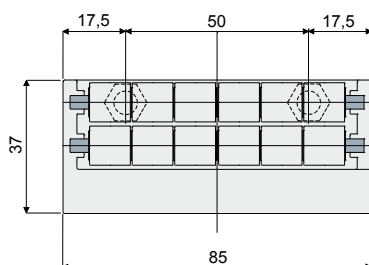

Type	Code
D62	CP000478

MATERIALS: Modular transfer plate with external module and rollers made of acetal grey colour; pins and fixing bolts and nuts made of stainless steel AISI 304.



FEATURES: To be assembled at the end of your conveyor to help the products transfer. Easy to assemble, low friction coefficient, minimum noise level, extremely cleanable.

BOX QUANTITY: 8 pieces.

ON REQUEST:

- External module and rollers: Can be produced in other colours.
- Box Quantity: According to your request.

Roller side guide (single type, with pearls) Type: T06

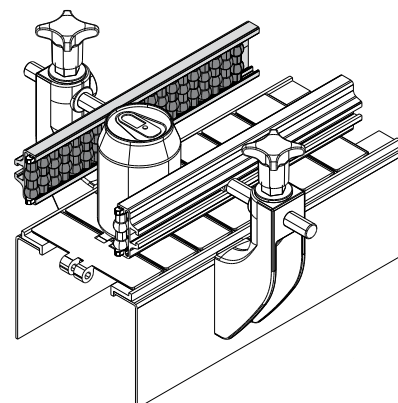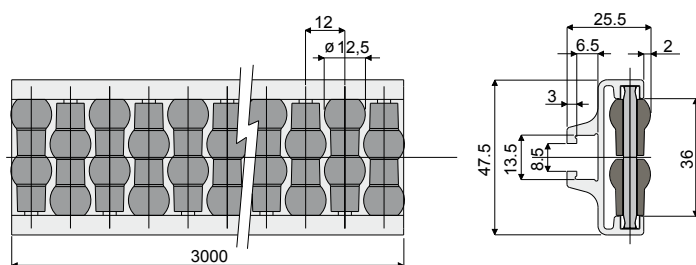

Example of application

Type	Code
T06	CP000479

MATERIALS: Roller side guide with metal profile in anodized aluminium;
rollers in polyamide grey colour; support pins in acetal resin white colour.

FEATURES: Supplied already assembled, in bars of 3 meters length.



Min. curvature radius: 250 mm.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).

ON REQUEST:

- Roller side guide: Other colours.

Roller side guide (double type, with pearls) Type: T07

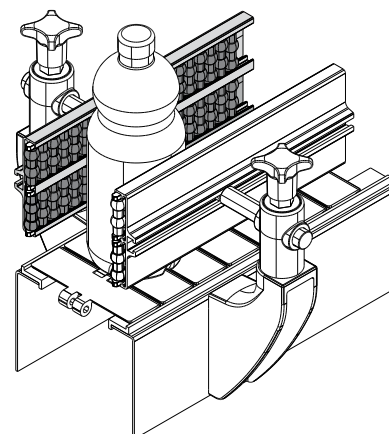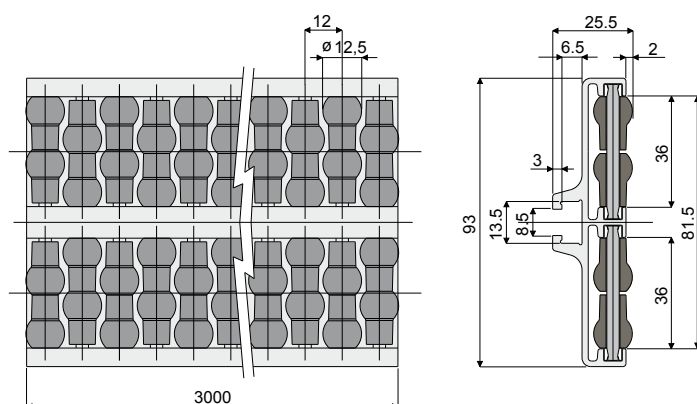

Example of application

Type	Code
T07	CP000480

MATERIALS: Roller side guide with metal profile in anodized aluminium;
rollers in polyamide grey colour; support pins in acetal resin white colour.

FEATURES: Supplied already assembled, in bars of 3 meters length.



Min. curvature radius: 500 mm.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).

ON REQUEST:

- Roller side guide: Other colours.

Roller central guide (single type, with pearls) Type: T08

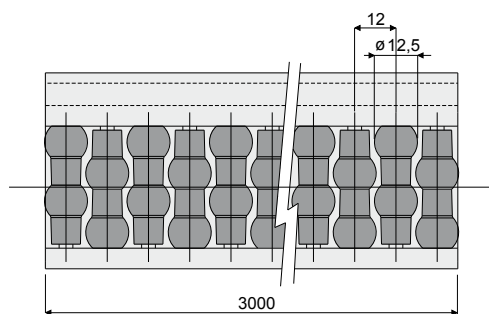

Type	Code
T08	CP000481

MATERIALS: Roller central guide with metal profile in anodized aluminium; rollers in polyamide grey colour; support pins in acetal resin white colour.


FEATURES: Supplied already assembled, in bars of 3 meters length.

Min. curvature radius: 500 mm.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).



ON REQUEST:

- Roller central guide: Other colours.

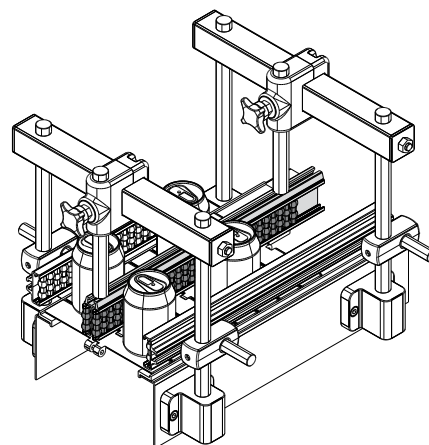

Example of application

Roller central guide (double type, with pearls) Type: T19

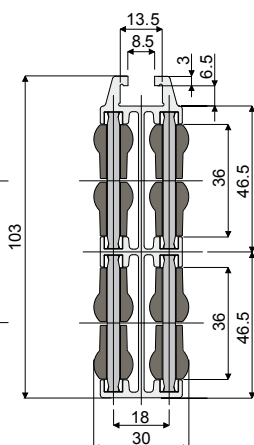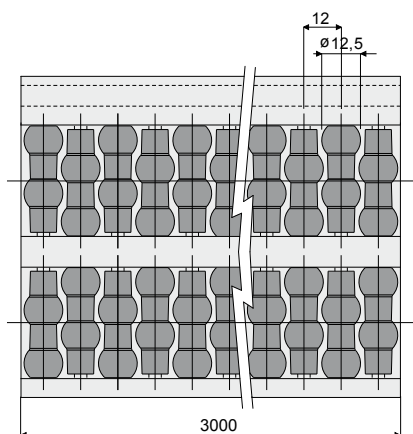

Type	Code
T19	CP000482

MATERIALS: Roller central guide with metal profile in anodized aluminium; rollers in polyamide grey colour; support pins in acetal resin white colour.


FEATURES: Supplied already assembled, in bars of 3 meters length.

Min. curvature radius: 750 mm.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).




ON REQUEST:

- Roller central guide: Other colours.

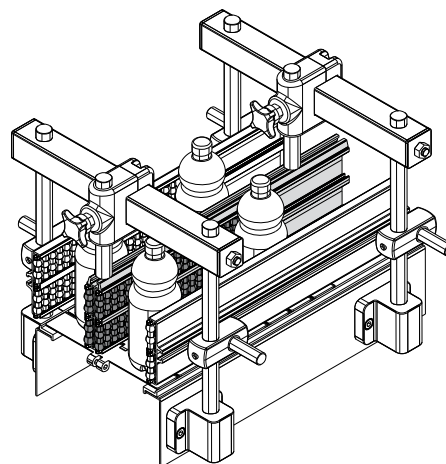

Example of application

Roller side guide (single type, with cylinders) Type: T25

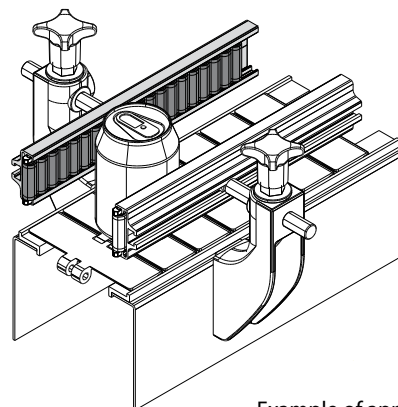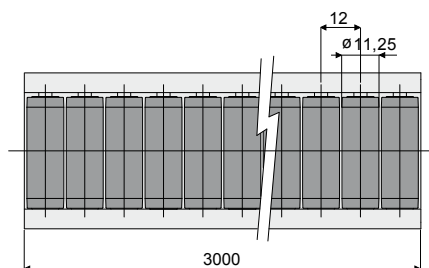

Example of application

Type	Code
T25	CP000483

MATERIALS: Roller side guide with metal profile in anodized aluminium; rollers in polyamide grey colour; support pins in acetal resin white colour.

FEATURES: Supplied already assembled, in bars of 3 meters length.




Min. curvature radius: 250 mm.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).

ON REQUEST:

- Roller side guide: Other colours.

Roller side guide (double type, with cylinders) Type: T26

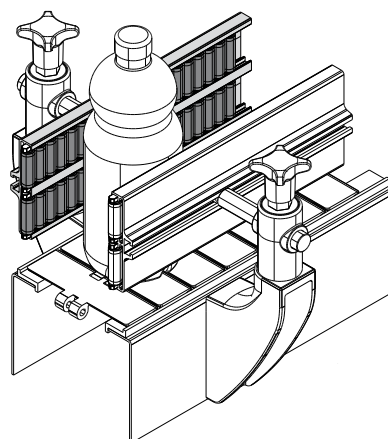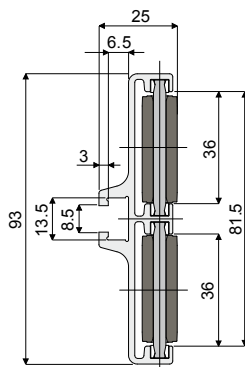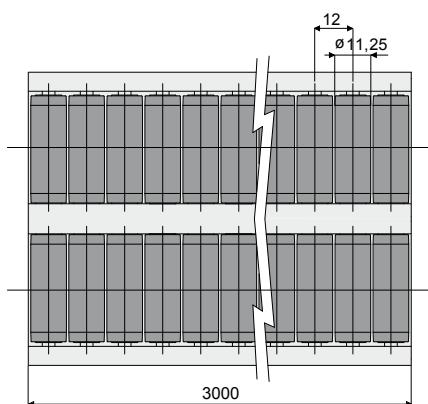

Example of application

Type	Code
T26	CP000484

MATERIALS: Roller side guide with metal profile in anodized aluminium; rollers in polyamide grey colour; support pins in acetal resin white colour.

FEATURES: Supplied already assembled, in bars of 3 meters length.



Min. curvature radius: 500 mm.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).

ON REQUEST:

- Roller side guide: Other colours

Roller central guide (single type, with cylinders) Type: T27

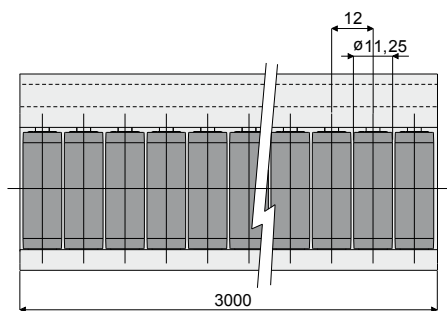

Type	Code
T27	CP000485

MATERIALS: Roller central guide with metal profile in anodized aluminium; rollers in polyamide grey colour; support pins in acetal resin white colour.


FEATURES: Supplied already assembled, in bars of 3 meters length.

Min. curvature radius: 500 mm.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).




ON REQUEST:

- Roller central guide: Other colours.

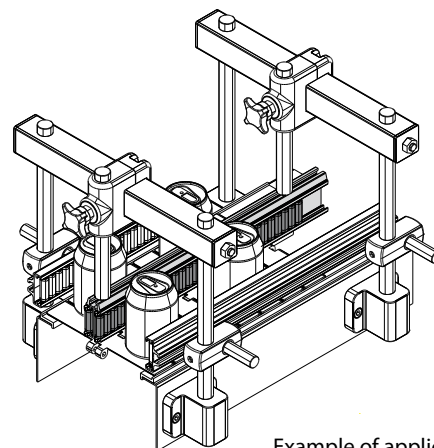

Example of application

Roller central guide (double type, with cylinders) Type: T28

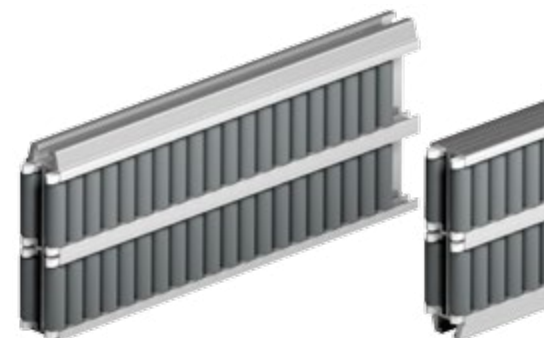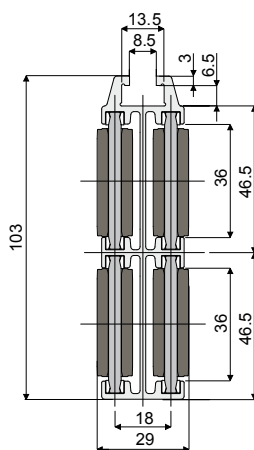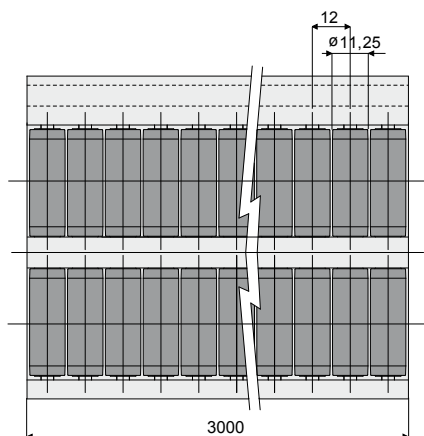

Type	Code
T28	CP000486

MATERIALS: Roller central guide with metal profile in anodized aluminium; rollers in polyamide grey colour; support pins in acetal resin white colour.


FEATURES: Supplied already assembled, in bars of 3 meters length.

Min. curvature radius: 750 mm.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).



ON REQUEST:

- Roller central guide: Other colours.

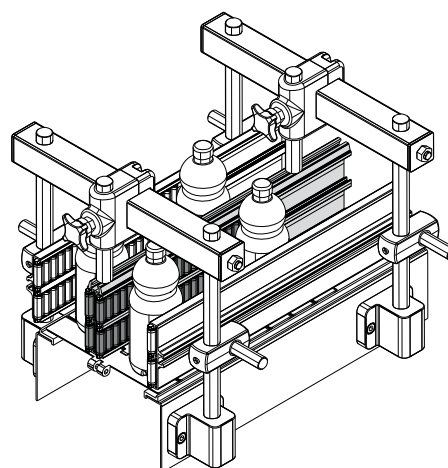

Example of application

Roller side guides (single type, with small cylinders) Type: T55

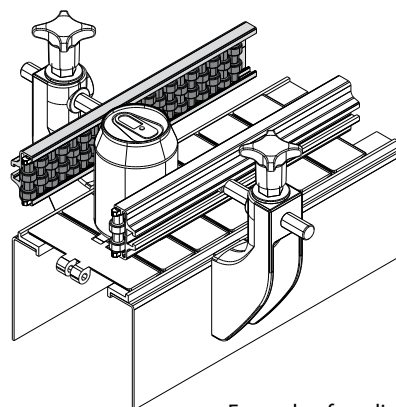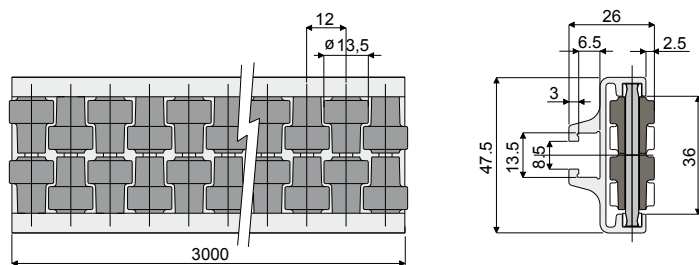

Example of application

Type	Code
T55	CP000487

MATERIALS: Roller side guide with metal profile in anodized aluminium;
rollers in polyamide grey colour; support pins in acetal resin white colour.

FEATURES: Supplied already assembled, in bars of 3 meters length.




Min. curvature radius: 250 mm.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).

ON REQUEST:

- Roller side guide: Other colours.

Roller side guides (double type, with small cylinders) Type: T56

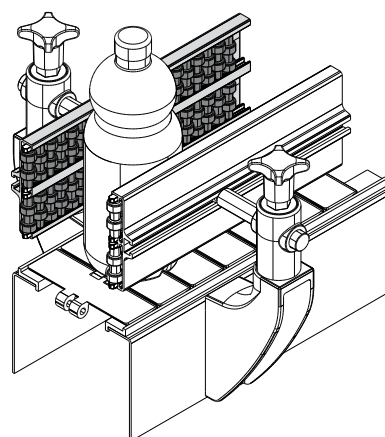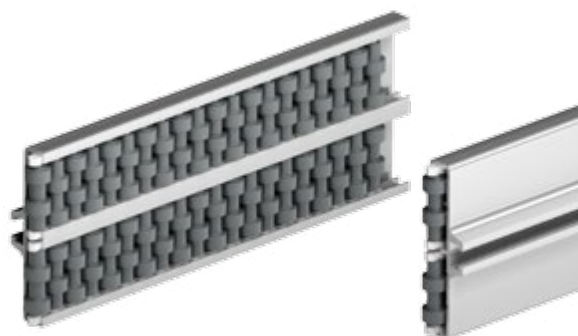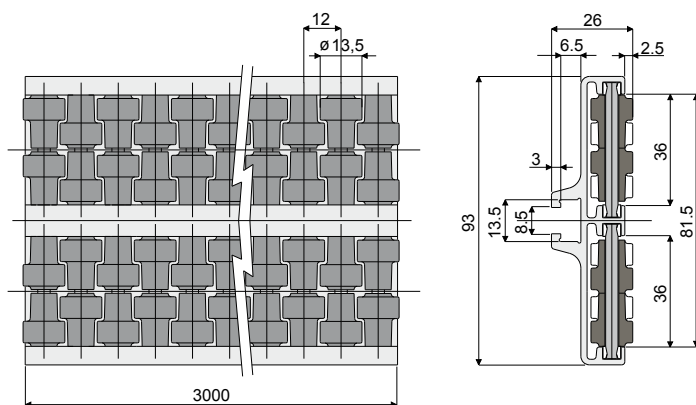

Example of application

Type	Code
T56	CP000488

MATERIALS: Roller side guide with metal profile in anodized aluminium;
rollers in polyamide grey colour; support pins in acetal resin white colour.

FEATURES: Supplied already assembled, in bars of 3 meters length.



Min. curvature radius: 500 mm.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).

ON REQUEST:

- Roller side guide: Other colours.

Roller central guides (single type, with small cylinders) Type: T57

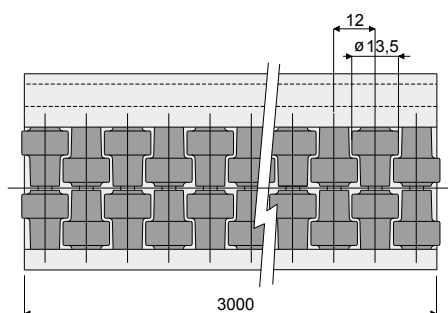

Type	Code
T57	CP000489

MATERIALS: Roller side guide with metal profile in anodized aluminium; rollers in polyamide grey colour; support pins in acetal resin white colour.


FEATURES: Supplied already assembled, in bars of 3 meters length.

Min. curvature radius: 500 mm.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).



ON REQUEST:

- Roller side guide: Other colours.

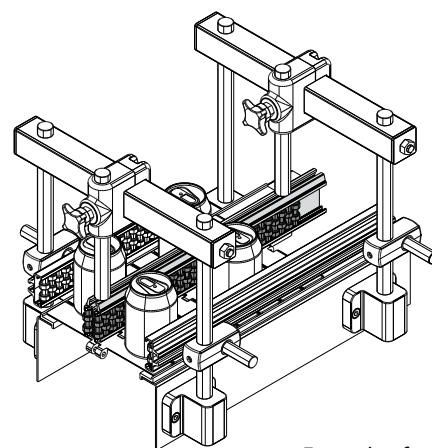

Example of application

Roller central guides (double type, with small cylinders) Type: T58

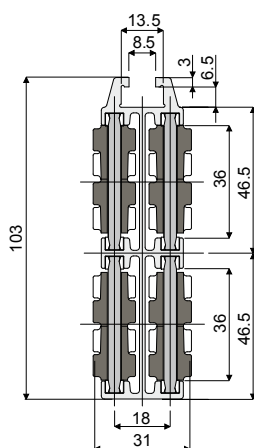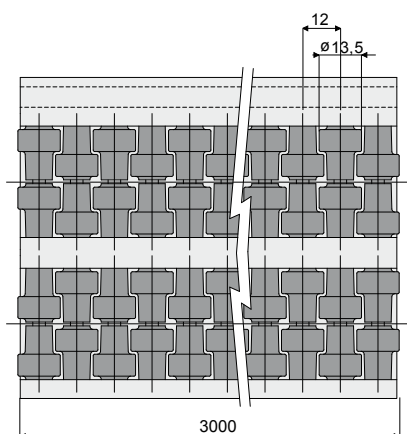

Type	Code
T58	CP000490

MATERIALS: Roller side guide with metal profile in anodized aluminium; rollers in polyamide grey colour; support pins in acetal resin white colour.


FEATURES: Supplied already assembled, in bars of 3 meters length.

Min. curvature radius: 750 mm.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).



ON REQUEST:

- Roller side guide: Other colours.

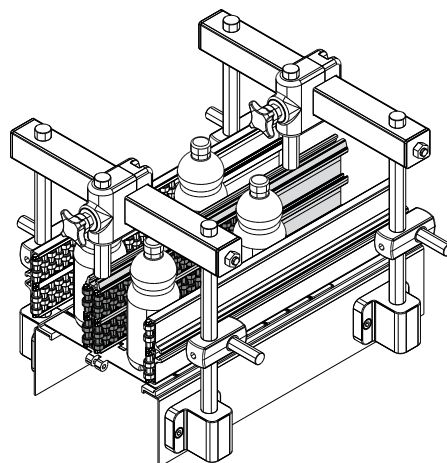

Example of application

Profiles for guides Type: T20, T21, T22 e T23

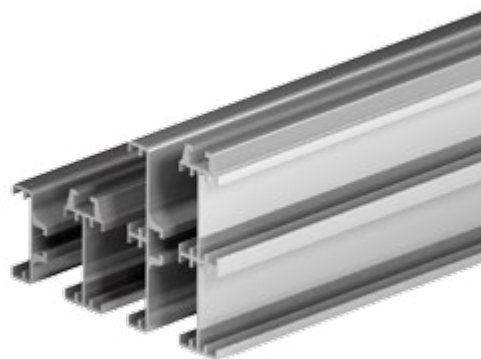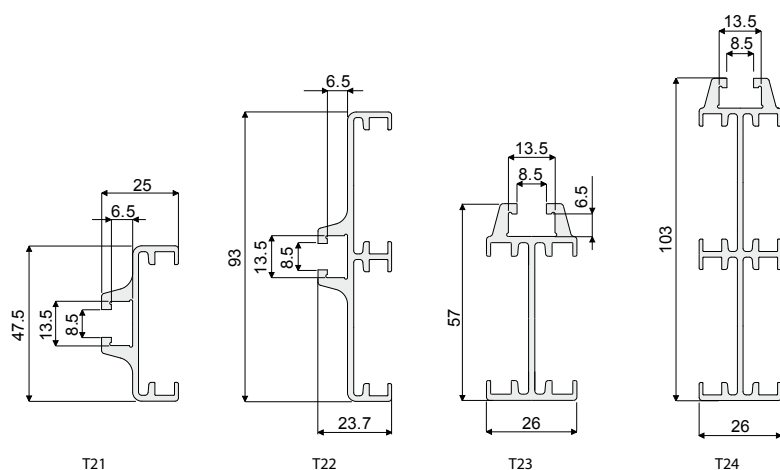

Type	Version	Type	Code	Length
Side	Single	T20	CP000491	3000
	Double	T21	CP000492	3000
Central	Single	T22	CP000493	3000
	Double	T23	CP000494	3000




MATERIALS: Metal profile in anodized aluminium.

FEATURES: Supplied in bars of 3 meters length.

To be used with roller guides T06, T07, T08, T19, T25, T26, T27, T28.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).

Separation block for roller side guide (single type) Type: T40

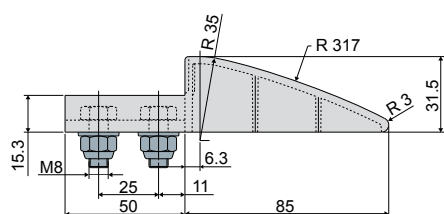

Example of application



Type	Code
T40	CP000495

MATERIALS: Separation block is made of polyethylene, grey colour; bolts and nuts in stainless steel AISI 304.


FEATURES: Supplied complete with bolts and nuts.

To be used at the end of the roller side guides, to help the arrival of the products.

BOX QUANTITY: 8 pieces.



ON REQUEST:

- Separation blocks: Other colours.
- Box Quantity: According to your request

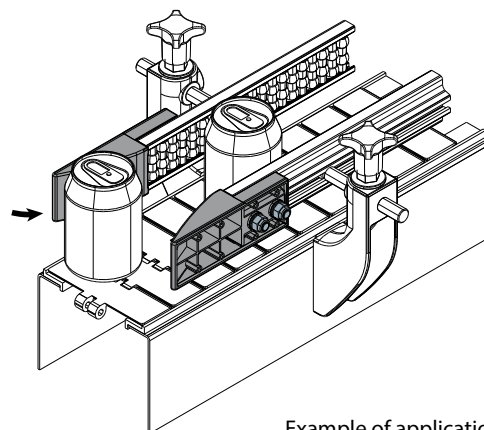

Example of application

Separation block for roller central guide (single type) Type: T41

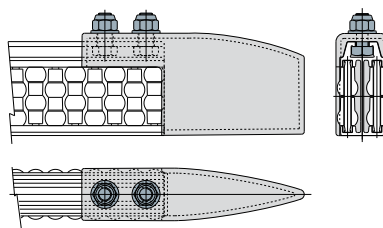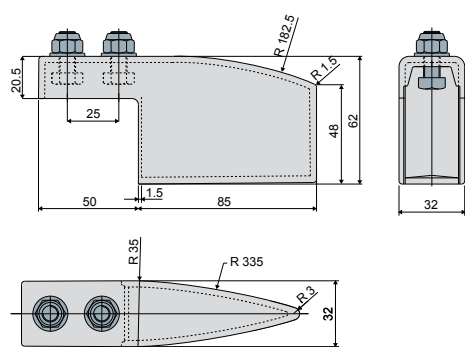

Example of application



Type	Code
T41	CP000496


MATERIALS: Separation block is made of polyethylene, grey colour; bolts and nuts in stainless steel AISI 304.

FEATURES: Supplied complete with bolts and nuts. To be used at the end of the roller side guides, to help the arrival of the products.

BOX QUANTITY: 8 pieces.




ON REQUEST:

- Separation blocks: Other colours.
- Box Quantity: According to your request.

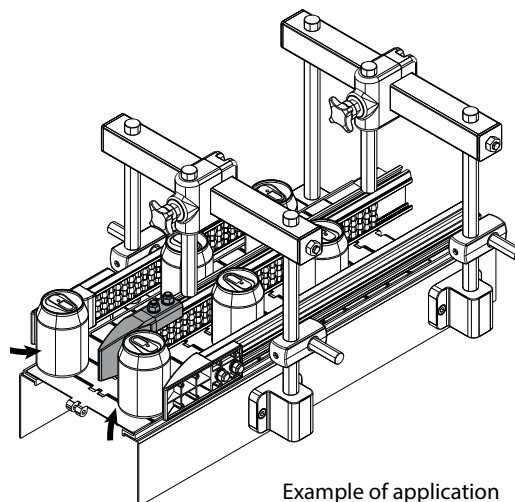

Example of application

Separation block for roller side guide (double type) Type: T42

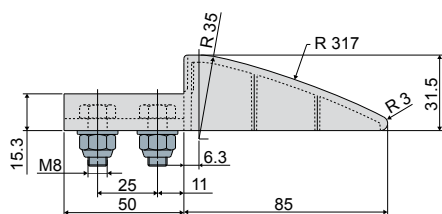

Example of application



Type	Code
T42	CP000497


MATERIALS: Separation block is made of polyethylene, grey colour; bolts and nuts in stainless steel AISI 304.

FEATURES: Supplied complete with bolts and nuts. To be used at the end of the roller side guides, to help the arrival of the products.

BOX QUANTITY: 8 pieces.




ON REQUEST:

- Separation blocks: Other colours.
- Box Quantity: According to your request


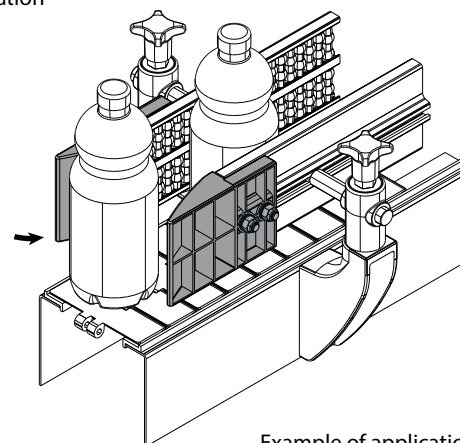


Example of application

Separation block for roller central guide (double type) Type: T43

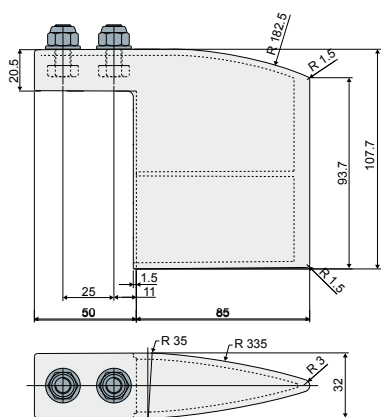

Example of application

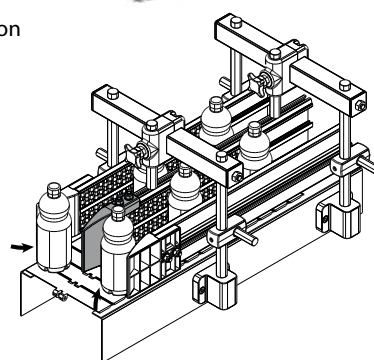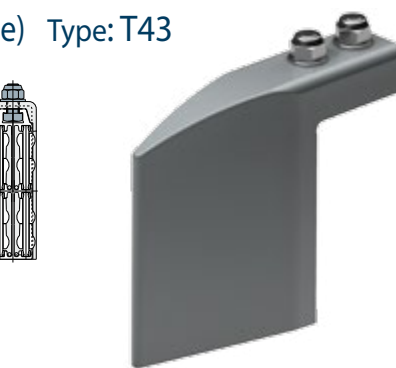

Type	Code
T43	CP000498

MATERIALS: Separation block is made of polyethylene, grey colour; bolts and nuts in stainless steel AISI 304.
FEATURES: Supplied complete with bolts and nuts. To be used at the end of the roller side guides, to help the arrival of the products. **BOX QUANTITY:** 8 pieces.
ON REQUEST: • Separation blocks: Other colours. • Box Quantity: According to your request



Guide profile for products Type: T29

Type	Code
T29	CP000499

MATERIALS: Profile made of natural polyethylene white colour.
FEATURES: Supplied in bars of 3 meters length. To be used with side guides T20, T21, T22, T23.
BOX QUANTITY: 2 bars of 3 meters (total 6 meters).



ON REQUEST:

- Box Quantity: According to your request.

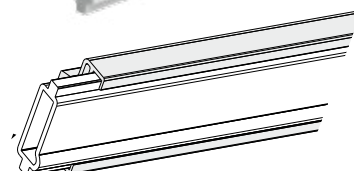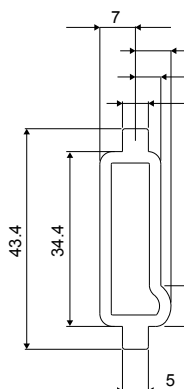

Example of application


Guide rail (with metal profile) Type: T53

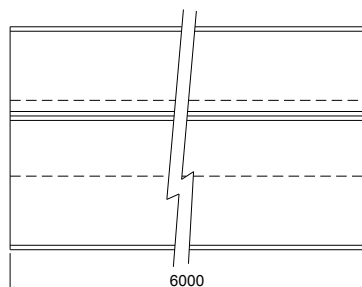

Type	Code
T53	CP000500


MATERIALS: Plastic profile in polyethylene natural colour; metal profile in stainless steel AISI 304.
FEATURES: Supplied already assembled in lengths of 6 meters.
BOX QUANTITY: 2 bars of 6 meters (total 12 meters).

ON REQUEST:



Example of application

Guide rail (round, with metal profile) Type: T54

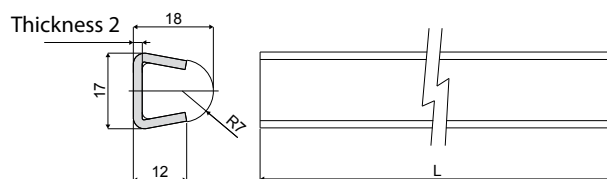

Type	Code	L
T54A	CP000501	6000
T54B	CP000502	3000


MATERIALS: Plastic profile in polyethylene natural colour;
metal profile in stainless steel AISI 304.

FEATURES: Supplied already assembled in lengths of 3 or 6 meters.

BOX QUANTITY: 2 bars of 6 mts. (total 12 mts.), or 2 bars of 3 mts. (total 6 mts.).



ON REQUEST:

- Box Quantity: According to your request.

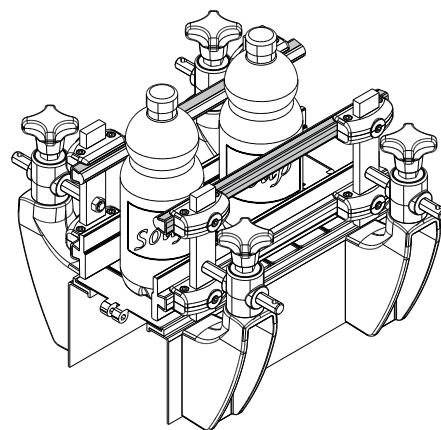


Example of application

Connecting bar for roller guides Type: T18



Type	Code
T18	CP000503

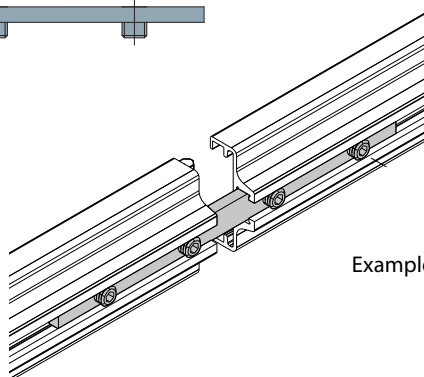

Example of application

MATERIALS: Bar is made of zinc plated steel supplied with 4 screws M8x10.



FEATURES: To be used for connecting the metal profiles of T06, T07, T08, T19, T25, T26, T27, T28, T20, T21, T22, T23.

BOX QUANTITY: 8 pieces.

ON REQUEST:

- Box Quantity: According to your request.

Roller side guide (375 mm modules, with cylinders) Type: T39

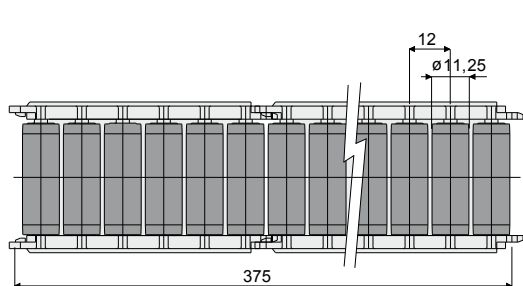


Type	Code
T39	CP000504

MATERIALS: Rollers in polyamide grey colour;
support pins and modules in acetal resin black colour.
FEATURES: Supplied already assembled, in modules of 375 mm length, for 40x8 mm plate.
Min. curvature radius: ext = 500 mm; int. = 350 mm.
BOX QUANTITY: 12 pieces.



ON REQUEST:

- Module and rollers: Can be produced in other colours.
- Box Quantity: According to your request.

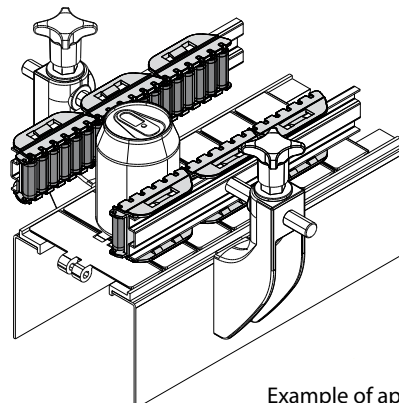

Example of application

Roller side guide (375 mm modules with small cylinders) Type: T44

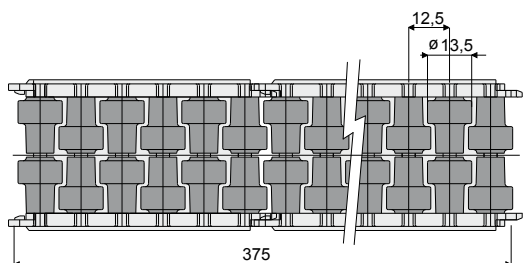


Type	Code
T44	CP000505

MATERIALS: Rollers in polyamide grey colour;
support pins and modules in acetal resin black colour.
FEATURES: Supplied already assembled, in modules of 375 mm length, for 40x8 mm plate.
Min. curvature radius: ext = 500 mm; int. = 350 mm.
BOX QUANTITY: 12 pieces.



ON REQUEST:

- Module and rollers: can be produced in other colours
- Box quantity: According to your request.

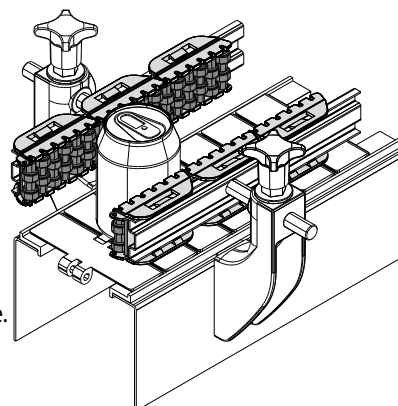

Example of application

Roller side guide (375 mm modules with pearls) Type: T45

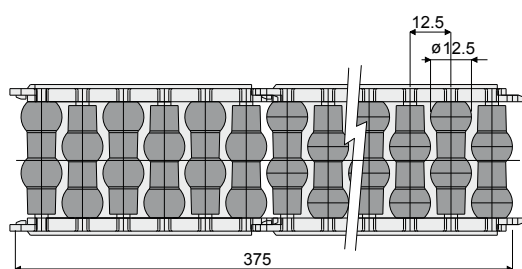

Type	Code
T45	CP000506


MATERIALS: Rollers in polyamide grey colour; support pins and modules in acetal resin black colour.

FEATURES: Supplied already assembled, in modules of 375 mm length, for 40x8 mm plate. Min. curvature radius: ext = 500 mm; int. = 350 mm.

BOX QUANTITY: 12 pieces.



ON REQUEST:

- Module and rollers: can be produced in other colours
- Box quantity: According to your request.

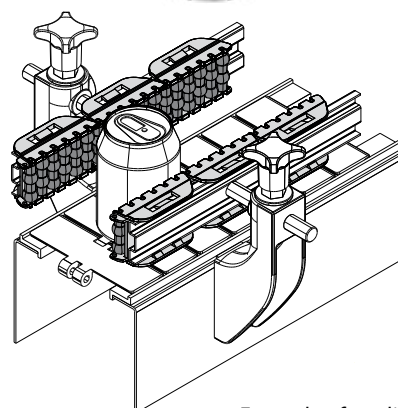


Example of application

Profiles for side guides Type: T30

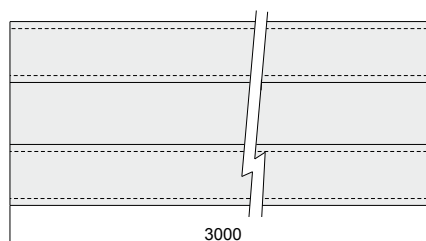

Stainless steel AISI 430		Stainless steel AISI 304	
Type	Code	Type	Code
T30	CP000507	TX30	CP000508



Example of application


MATERIALS: Profiles in stainless steel AISI 430 or AISI 304.

FEATURES: Supplied in bars of 3 meters length. To be used with side guide T39.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).



ON REQUEST:

- Box Quantity: According to your request.

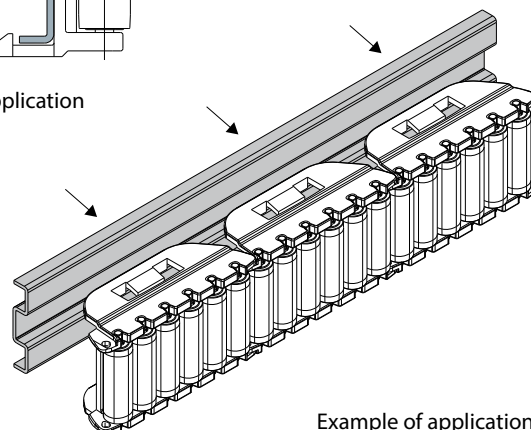

Example of application

Shoe for chain return (for raised rib chains) Type: T59

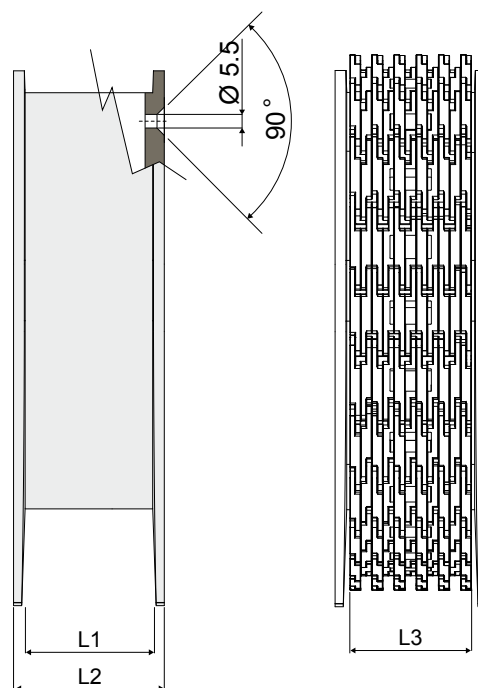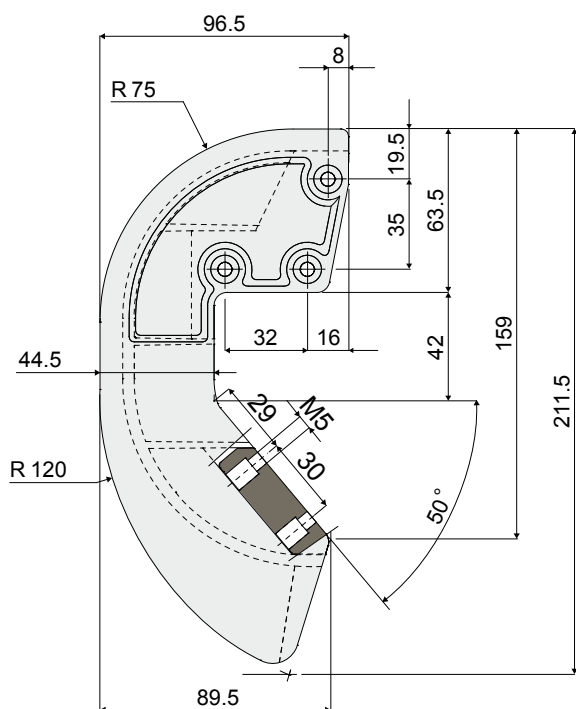

Type	Code	L1	L2	L3 (Chain width)
T59A	CP000509	41	50	38.5
T59B	CP000510	49	58.5	47


MATERIALS: Shoe in black polyethylene;
screws in stainless steel AISI 304.

FEATURES: Supplied complete with screws.
To be used in the idler part of the conveyor.

BOX QUANTITY: 8 pieces.



ON REQUEST:

- Shoes: Other colours.
- Box Quantity: According to your request

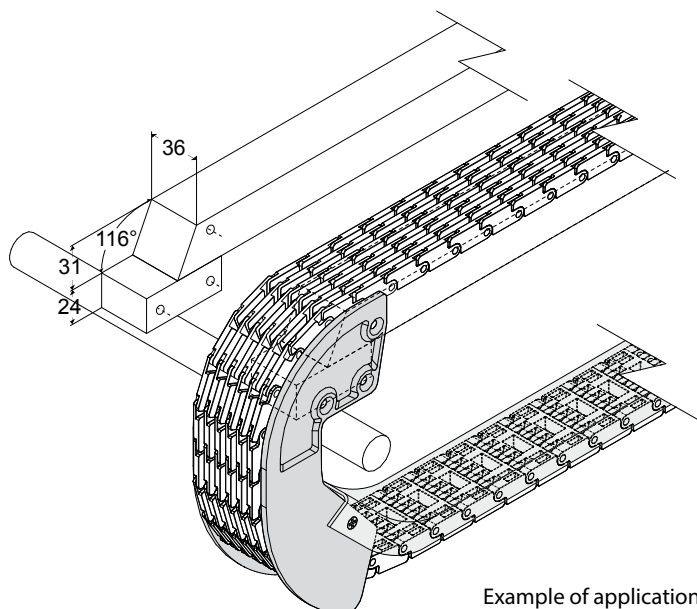

Example of application

Scanning lever Type: T60

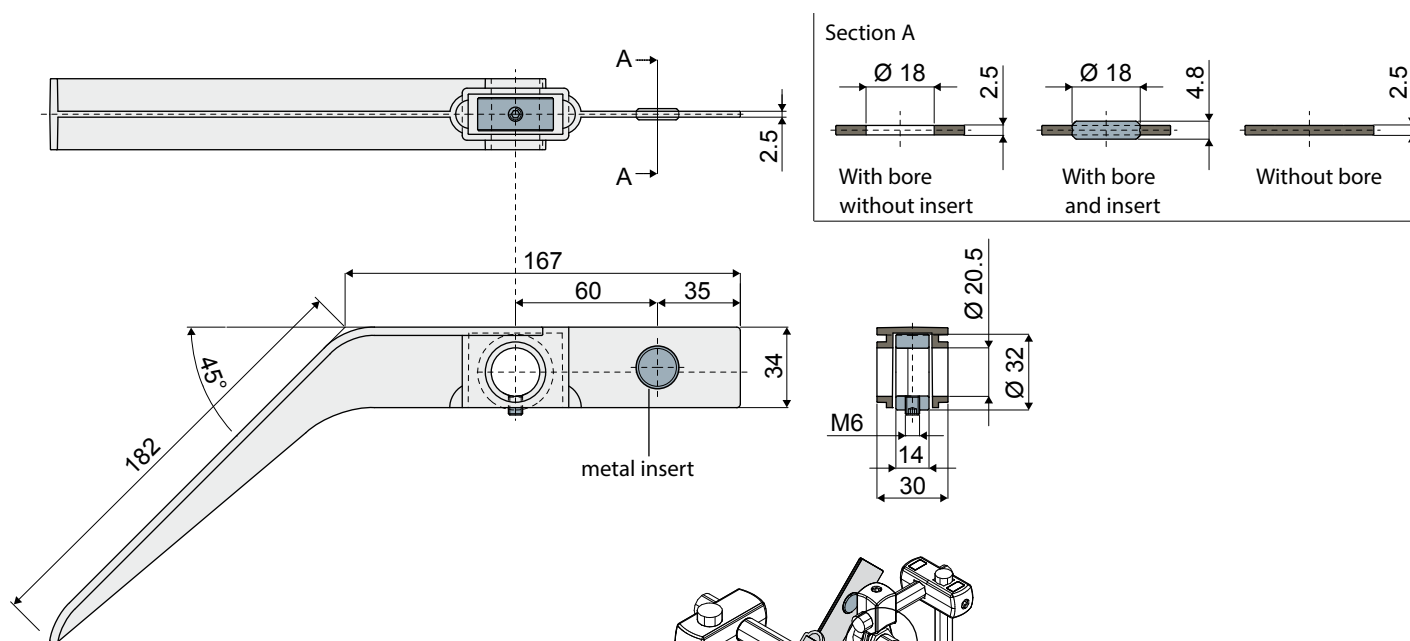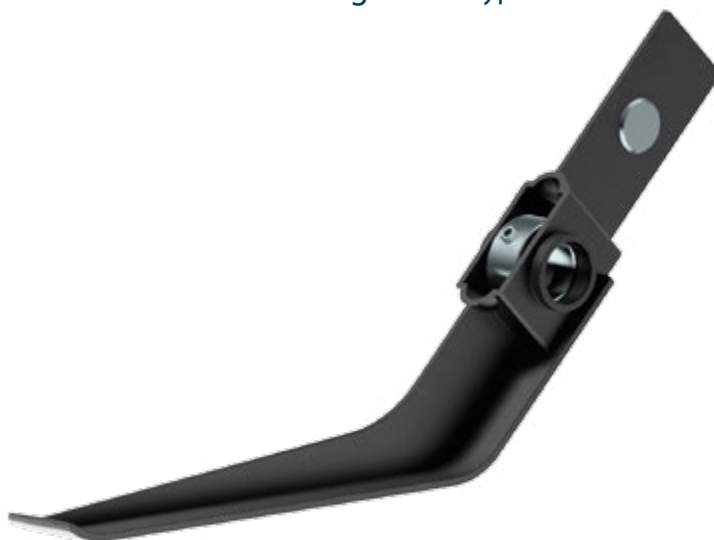

Without bore		With bore, without sensor insert		With bore and sensor insert	
Type	Code	Type	Code	Type	Code
T60A	CP000511	T60B	CP000512	T60C	CP000513

MATERIALS: Scanning lever in reinforced Polyamide black colour; grain and collar in zinc-plated steel.


FEATURES: Supplied assembled.

To be used in the surveying of the packaged products, to help the arrival of the products.



BOX QUANTITY: 24 pieces.

ON REQUEST:





- Scanning lever: Other colours.
- Box Quantity: According to your request.

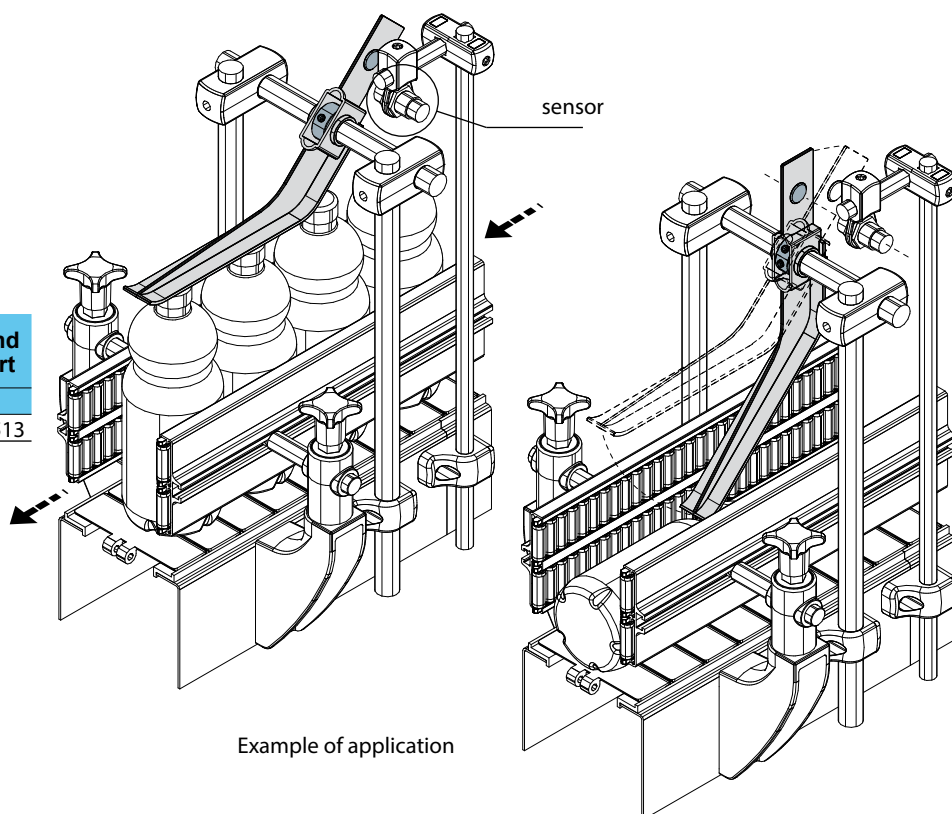

Spacer for guide rail pin Type: T52

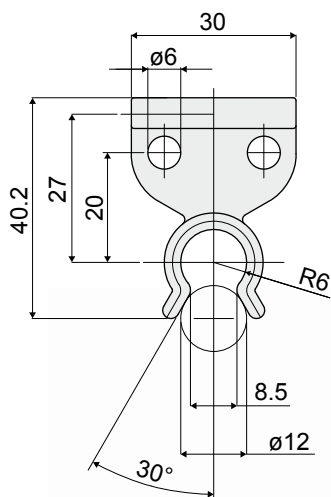

Example of application

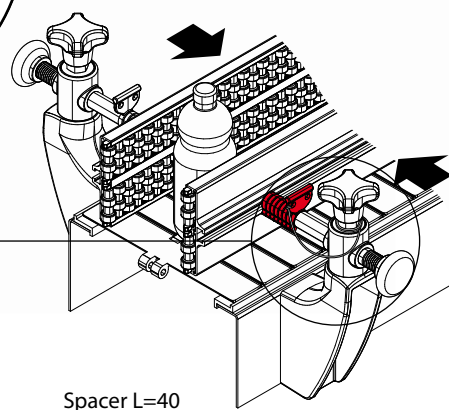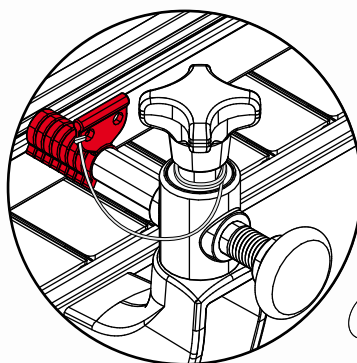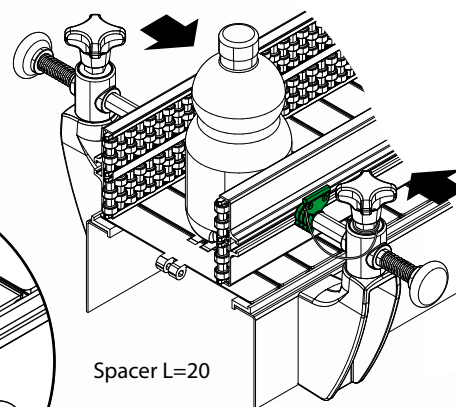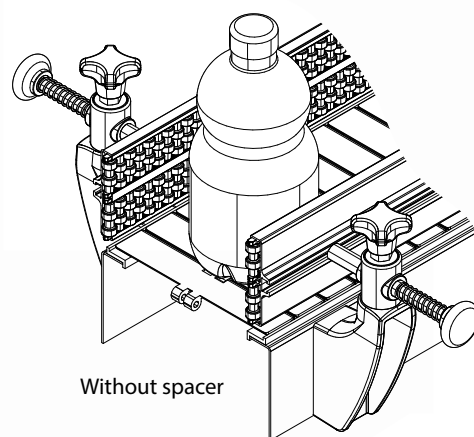

L	Couleur	Type	Code
5	Blanc RAL 9001	T52A	CP000514
10	Rouge RAL 3000	T52B	CP000515
15	Noir RAL 9005	T52C	CP000516
20	Vert RAL 6029	T52D	CP000517
25	Jaune RAL 1021	T52E	CP000518
30	Orange RAL 2004	T52F	CP000519
35	Bleu RAL 5015	T52G	CP000520
40	Blanc RAL 9001	T52H	CP000521
	Rouge RAL 3000	T52I	CP000522
	Noir RAL 9005	T52L	CP000523
	Vert RAL 6029	T52M	CP000524
	Jaune RAL 1021	T52N	CP000525
	Orange RAL 2004	T52O	CP000526
	Bleu RAL 5015	T52P	CP000527
	Gris RAL 7035	T52Q	CP000528

MATERIALS: Spacer in polypropylene.

FEATURES: To be used to adjust the distance between the side guides.


Snap-on assembly. Available in different lengths and colours.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Spacers: Other colours.
- Box Quantity: according to your request.

Reference peg for size changing Type: T31

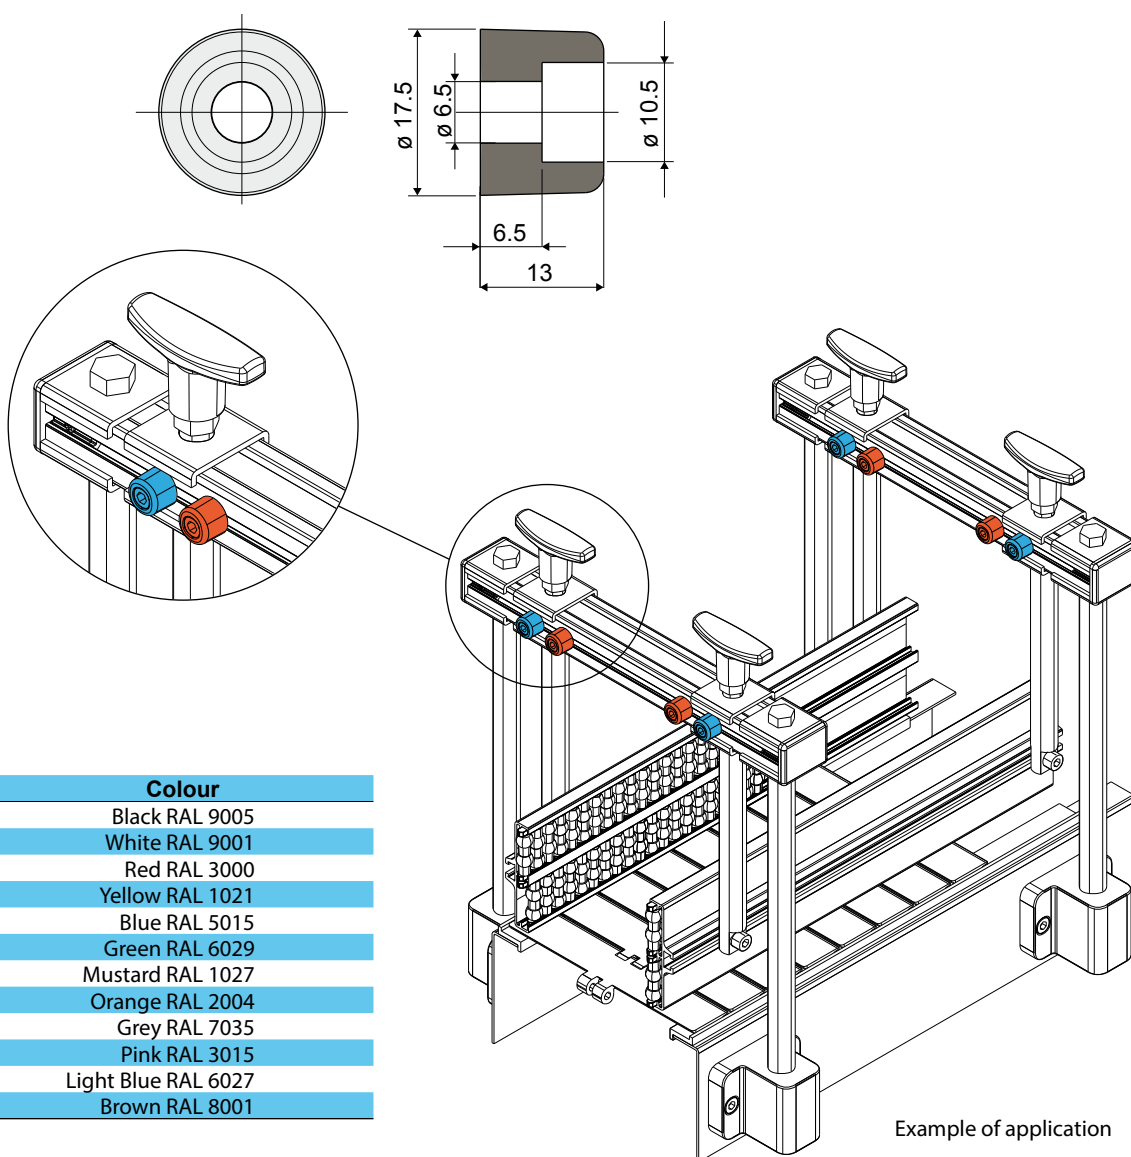

Type	Code	Colour
T31A	CP000529	Black RAL 9005
T31B	CP000530	White RAL 9001
T31C	CP000531	Red RAL 3000
T31D	CP000532	Yellow RAL 1021
T31E	CP000533	Blue RAL 5015
T31F	CP000534	Green RAL 6029
T31G	CP000535	Mustard RAL 1027
T31H	CP000536	Orange RAL 2004
T31I	CP000537	Grey RAL 7035
T31L	CP000538	Pink RAL 3015
T31M	CP000539	Light Blue RAL 6027
T31N	CP000540	Brown RAL 8001

MATERIALS: Peg in reinforced polypropylene.

FEATURES: To be used as a reference on the transport guides for size changing.




BOX QUANTITY: 96 pieces.

ON REQUEST:

- Pegs: Can be produced in other colours.
- Box Quantity: According to your request.

Example of application

Reducer for racks (for the cross adjustment of the side guides) Type: D99

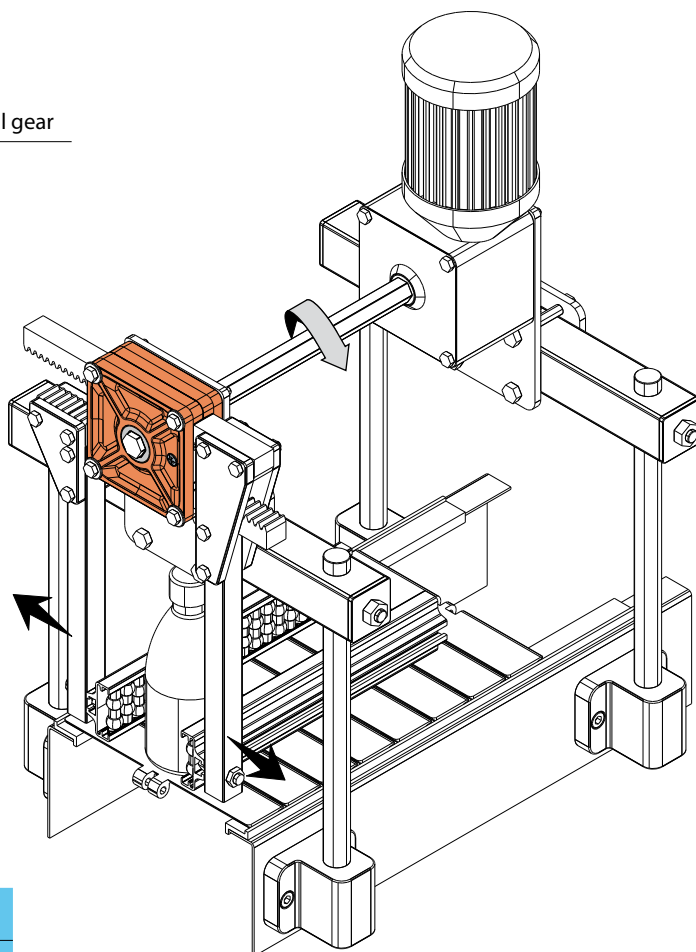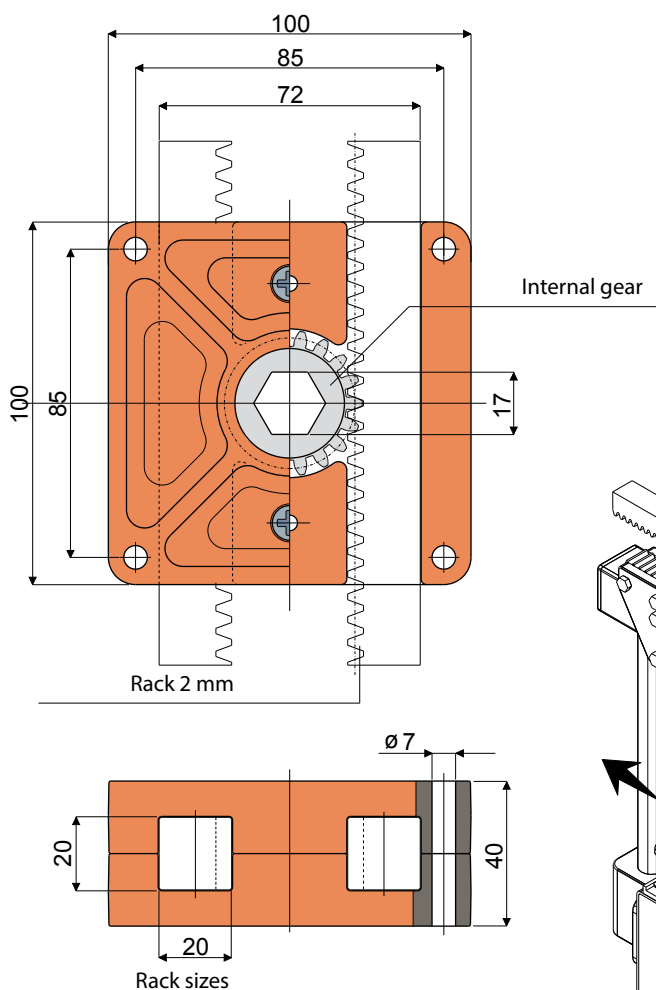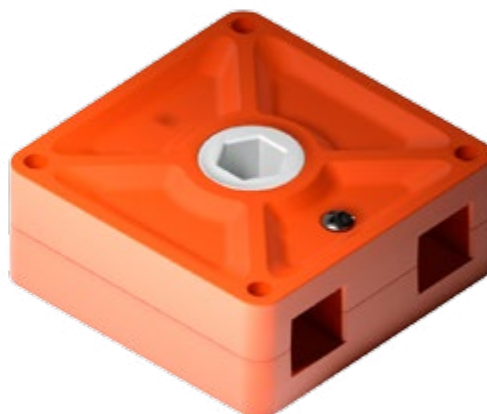

Example of application

Internal gear made of acetal		Internal gear made of brass		Without internal gear	
Type	Code	Type	Code	Type	Code
D99A	CP000541	D99B	CP000542	D99C	CP000543

MATERIALS: External body of reducer is made of reinforced polyamide orange colour; self-threading screw is made of stainless steel AISI 304. Available: without internal gear; with internal gear made of acetal, white color; with internal gear made of brass.

FEATURES: To be used for the cross adjustment of the side guides while changing the size of the conveyed product.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Reducers: In different colours.
- Box Quantity: According to your request.

SUPPORTS OF POLYAMIDE

Serie SF/C
Serie MSF/Cpage 83
page 83Serie SF/CX
Serie MSF/CXpage 84
page 84Serie SF
Serie MSFpage 85
page 85Serie SF/CS
Serie MSF/CSpage 86
page 86

Serie UCF/CA

page 87



Serie SF/CXA

page 88



Serie SFL/C

page 89



Serie SFL/CX

page 90



SerieSFL

page 91



Serie SFL/CS

page 92



Serie MSFL/C

page 93



Serie MSFL/CX

page 94



Serie MSFL

page 95



Serie SFB/C

page 96



Serie SFB/CX


page 97




Serie SFB

page 98

Square flanged bearing supports Type: SF/C (SX/C) and MSF/C (MSX/C)

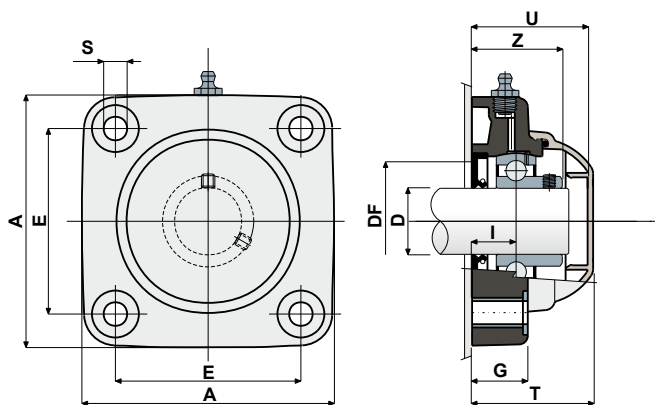

CLOSED TYPE

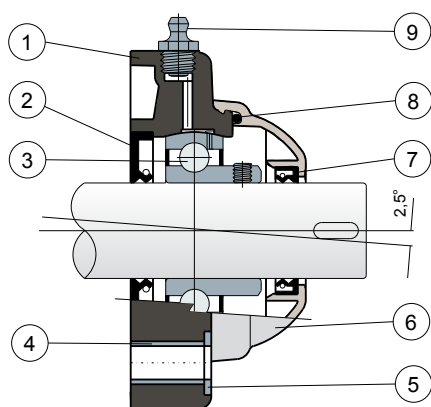

OPEN TYPE

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Protection cover made out of polypropylene (grey colour Ral 7042).
- 7) Front gasket made out of NBR rubber for turning shaft seal.
- 8) OR gasket made out of NBR rubber
- 9) Greaser for relubrication made out of nickel-plated brass.

Support dimensions respect ISO 3228 set of rules

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																		
D	CLOSED Type	OPEN Type	CODES		DIMENSIONS (mm)										Bearing load (N)		Support load	
			Closed Code	Open Code	E	A	S	G	I	Z	U	T	DF		C	C0	(N)	
													Max	Min				
20	SF/C 204	SF/C 204 A	CP000544	CP000551	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	16500	
25	SF/C 205	SF/C 205 A	CP000545	CP000552	70	99	10,5	22	17	36	47	49	50	45	14000	7800	17000	
30	SF/C 206	SF/C 206 A	CP000546	CP000553	83	113	10,5	26	20	41	54	56	60	50	19500	11300	17500	
35	SF/C 207	SF/C 207A	CP000547	CP000554	92	122	10,5	26	20	45	57	59	70	55	25500	15300	18000	
35	MSF/C 207	MSF/C 207A	CP000548	CP000555	83	113	10,5	26	19,5	45	65	68	70	55	16600	15300	18000	
40	SF/C 208	SF/C 208 A	CP000549	CP000556	102	133	10,5	26	19,5	48,5	65	68	78	65	32500	19800	18000	
40	MSF/C 208	MSF/C 208A	CP000550	CP000557	83	113	10,5	26	19,5	48,5	65	68	78	65	32500	19800	18000	

STAINLESS STEEL BEARING AISI 440C																	
D	CLOSED Type	OPEN Type	CODES		DIMENSIONS (mm)										Bearing load (N)		Support load
			Closed Code	Open Code	E	A	S	G	I	Z	U	T	DF		C	C0	(N)
													Max	Min			
20	SX/C 204	SX/C 204 A	CP000558	CP000565	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	8300	6550	16500
25	SX/C 205	SX/C 205 A	CP000559	CP000566	70	99	10,5	22	17	36	47	49	50	45	9150	7800	17000
30	SX/C 206	SX/C 206 A	CP000560	CP000567	83	113	10,5	26	20	41	54	56	60	50	12500	11200	17500
35	SX/C 207	SX/C 207 A	CP000561	CP000568	92	122	10,5	26	20	45	57	59	70	55	16600	15300	18000
35	MSX/C 207	MSX/C 206A	CP000562	CP000569	83	113	10,5	26	19,5	45	65	68	70	55	16600	15300	18000
40	SX/C 208	SX/C 208 A	CP000563	CP000570	102	133	10,5	26	19,5	48,5	65	68	78	65	20000	19000	18000
40	MSX/C 208	MSX/C 208A	CP000564	CP000571	83	113	10,5	26	19,5	48,5	65	68	78	65	20000	19000	18000




MATERIALS: Support made of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made of nickel plated brass; reinforcement bushings and washers made of stainless steel AISI 304; gaskets made of NBR rubber; cover made of polypropylene, grey colour RAL 7042.

FEATURES: Full protection of bearing against external agents. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; box quantity according to your request.

Square flanged bearing support Type: SF/CX (SX/CX) and MSF/CX (MSX/CX)

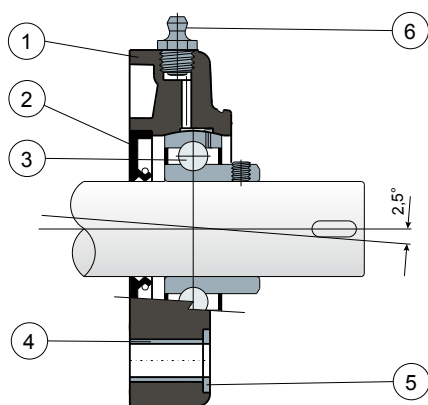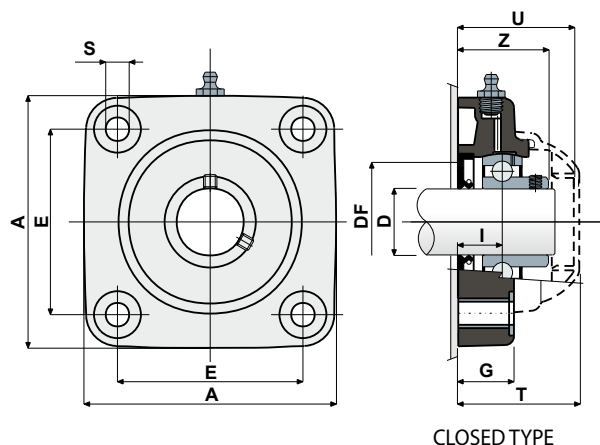

Without cover

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from SF/C (SX/C), MSF/C (MSX/C) series is lack of protection cover, which can be ordered separately as an accessory.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING

CHROME STEEL BEARING																			
D	Type	Support CODES	DIMENSIONS (mm)										Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	S	G	I	Z	U	T	DF		C	C0	(N)			Closed Code	Open Code
											Max	Min							
20	SF/CX 204	CP000572	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	16500	CF 204	CF 204 A	CP002004	CP002014
25	SF/CX 205	CP000573	70	99	10,5	22	17	36	47	49	50	45	14000	7800	17000	CF 205	CF 205 A	CP002005	CP002015
30	SF/CX 206	CP000574	83	113	10,5	26	20	41	54	56	60	50	19500	11300	17500	CF 206	CF 206 A	CP002006	CP002016
35	SF/CX 207	CP000575	92	122	10,5	26	20	45	57	59	70	55	25500	15300	18000	CF 207	CF 207 A	CP002007	CP002017
35	MSF/CX 207	CP000576	83	113	10,5	26	19,5	45	65	68	70	55	25500	15300	18000	CF 207	CF 207 A	CP002007	CP002017
40	SF/CX 208	CP000577	102	133	10,5	26	19,5	48,5	65	68	78	65	32500	19800	18000	CF 208	CF 208 A	CP002008	CP002018
40	MSF/CX 208	CP000578	83	113	10,5	26	19,5	48,5	65	68	78	65	32500	19800	18000	CF 208	CF 208 A	CP002008	CP002018

STAINLESS STEEL BEARING AISI 440C

STAINLESS STEEL BEARING AISI 440C																			
D	Type	Support CODES	DIMENSIONS (mm)										Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	S	G	I	Z	U	T	DF		C	C0	(N)			Closed Code	Open Code
											Max	Min							
20	SX/CX 204	CP000579	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	8300	6550	16500	CF 204	CF 204 A	CP002004	CP002014
25	SX/CX 205	CP000580	70	99	10,5	22	17	36	47	49	50	45	9150	7800	17000	CF 205	CF 205 A	CP002005	CP002015
30	SX/CX 206	CP000581	83	113	10,5	26	20	41	54	56	60	50	12500	11200	17500	CF 206	CF 206 A	CP002006	CP002016
35	SX/CX 207	CP000582	92	122	10,5	26	20	45	57	59	70	55	16600	15300	18000	CF 207	CF 207 A	CP002007	CP002017
35	MSX/CX 207	CP000583	83	113	10,5	26	19,5	45	65	68	70	55	16600	15300	18000	CF 207	CF 207 A	CP002007	CP002017
40	SX/CX 208	CP000584	102	133	10,5	26	19,5	48,5	65	68	78	65	20000	19000	18000	CF 208	CF 208 A	CP002008	CP002018
40	MSX/CX 208	CP000585	83	113	10,5	26	19,5	48,5	65	68	78	65	20000	19000	18000	CF 208	CF 208 A	CP002008	CP002018



MATERIALS: Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: The difference from SF/C (SX/C), MSF/C (MSX/C) series is lack of protection cover which can be ordered separately as an accessory. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; box quantity according to your request..

Square flanged bearing support Type: SF (SX) et MSF (MSX)

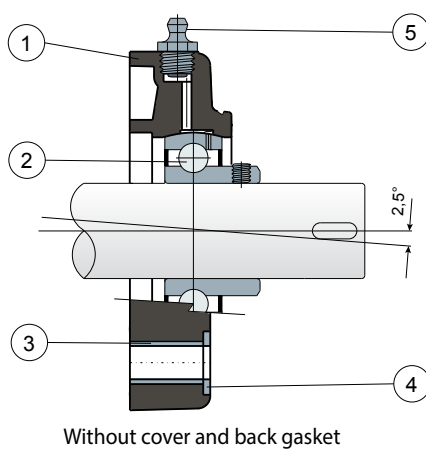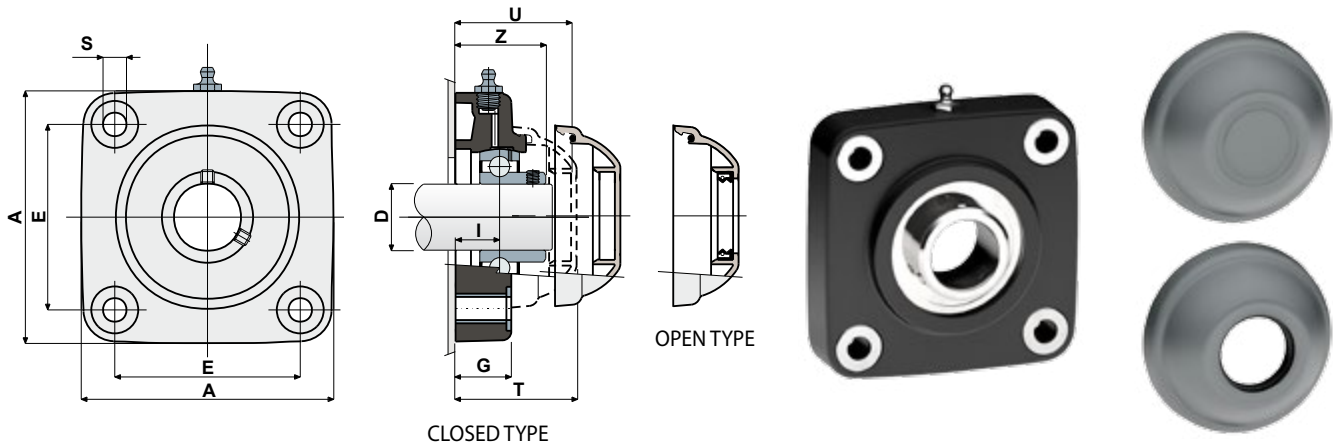

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Chrome steel or stainless steel bearing AISI 440C.
- 3) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 4) UNI 6592 support washer made out of stainless steel AISI 304.
- 5) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from SF/C (SX/C), MSF/C (MSX/C) series is lack of back gasket and protection cover, which can be ordered separately as accessories.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																	
D	Type	Support CODES	DIMENSIONS (mm)								Bearing load (N)		Support load (N)	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	S	G	I	Z	U	T	C	C0				Closed Code	Open Codet
20	SF 204	CP000588	63,5	90	10,5	19	15,5	33,5	44	46,5	12800	6600	16500	CF 204	CF 204 A	CP002004	CP002014
25	SF 205	CP000587	70	99	10,5	22	17	36	47	49	14000	7800	17000	CF 205	CF 205 A	CP002005	CP002015
30	SF 206	CP000588	83	113	10,5	26	20	41	54	56	19500	11300	17500	CF 206	CF 206 A	CP002006	CP002016
35	SF 207	CP000589	92	122	10,5	26	20	45	57	59	25500	15300	18000	CF 207	CF 207 A	CP002007	CP002017
35	MSF 207	CP000590	83	113	10,5	26	19,5	45	65	68	25500	15300	18000	CF 207	CF 207 A	CP002007	CP002017
40	SF 208	CP000591	102	133	10,5	26	19,5	48,5	65	68	32500	19800	18000	CF 208	CF 208 A	CP002008	CP002018
40	MSF 208	CP000592	83	113	10,5	26	19,5	48,5	65	68	32500	19800	18000	CF 208	CF 208 A	CP002008	CP002018

STAINLESS STEEL BEARING AISI 440C																	
D	Type	Support CODES	DIMENSIONS (mm)								Bearing load (N)		Support load (N)	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	S	G	I	Z	U	T	C	C0				Closed Code	Open Codet
20	SX 204	CP000593	63,5	90	10,5	19	15,5	33,5	44	46,5	8300	6550	16500	CF 204	CF 204 A	CP002004	CP002014
25	SX 205	CP000594	70	99	10,5	22	17	36	47	49	9150	7800	17000	CF 205	CF 205 A	CP002005	CP002015
30	SX 206	CP000595	83	113	10,5	26	20	41	54	56	12500	11200	17500	CF 206	CF 206 A	CP002006	CP002016
35	SX 207	CP000596	92	122	10,5	26	20	45	57	59	16600	15300	18000	CF 207	CF 207 A	CP002007	CP002017
35	MSX 207	CP000597	83	113	10,5	26	19,5	45	65	68	16600	15300	18000	CF 207	CF 207 A	CP002007	CP002017
40	SX 208	CP000598	102	133	10,5	26	19,5	48,5	65	68	20000	19000	18000	CF 208	CF 208 A	CP002008	CP002018
40	MSX 208	CP000599	83	113	10,5	26	19,5	48,5	65	68	20000	19000	18000	CF 208	CF 208 A	CP002008	CP002018



MATERIALS: Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: The difference from SF/C (SX/C), MSF/C (MSX/C) series is lack of back gasket and protection cover, which can be ordered separately as accessories. Assembly with shouldered and not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; box quantity according to your request..couleur différente et avec logo personnalisé; conditionnement hors standard.

Square flanged bearing supports Type: SF/CS et MSF/CS

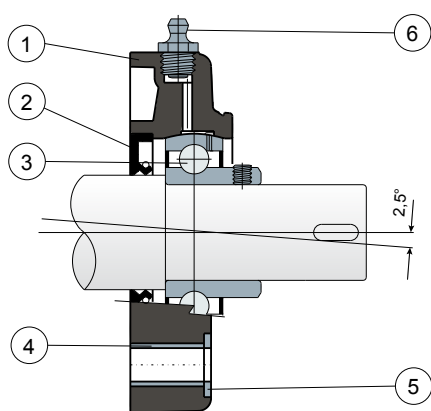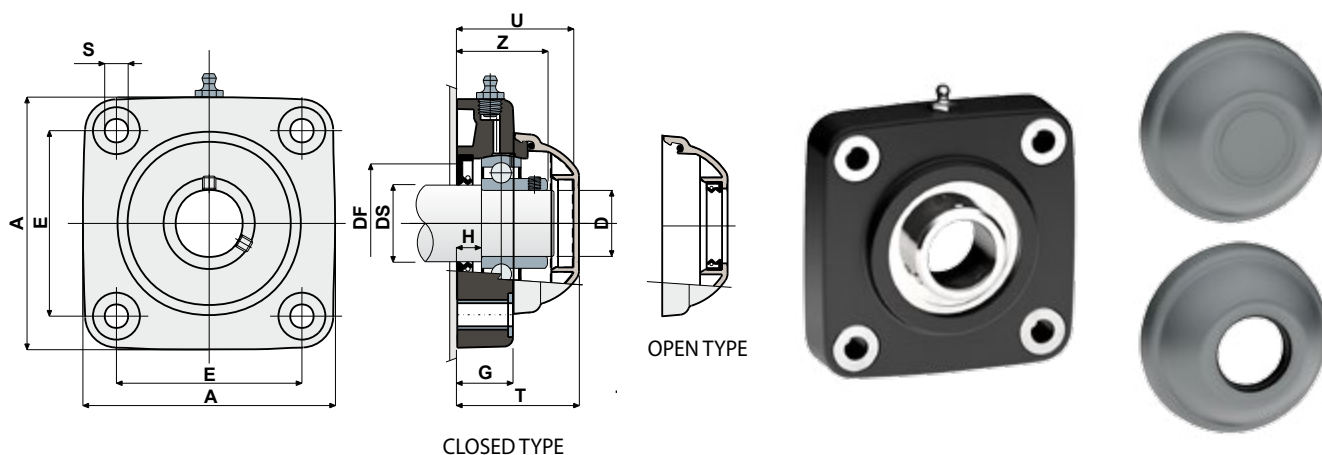

Back gasket for shouldered shaft

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser for relubrication made out of nickel-plated brass.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																				
DS	D	Type	CODES Support	DIMENSIONS (mm)										Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES	
				E	A	S	G	H	Z	U	T	DF		C	C0				(N)	Closed Code
												Max	Min							
25	20	SF/CS 204	CP000600	63,5	90	10,5	19	8,5	33,5	44	46,5	45	40	12800	6600	16500	CF 204	CF 204 A	CP002004	CP002014
30	25	SF/CS 205	CP000601	70	99	10,5	22	10	36	47	49	50	45	14000	7800	17000	CF 205	CF 205 A	CP002005	CP002015
35	30	SF/CS 206	CP000602	83	113	10,5	26	11,5	41	54	56	60	50	19500	11300	17500	CF 206	CF 206 A	CP002006	CP002016
40	35	SF/CS 207	CP000603	92	122	10,5	26	10,5	45	57	59	70	55	25500	15300	18000	CF 207	CF 207 A	CP002007	CP002017
45	40	SF/CS 208	CP000604	102	133	10,5	26	9	48,5	65	68	78	65	32500	19800	18000	CF 208	CF 208 A	CP002008	CP002018
45	40	MSF/CS 208	CP000605	83	113	10,5	26	9	48,5	65	68	78	65	32500	19800	18000	CF 208	CF 208 A	CP002008	CP002018


MATERIALS: Support made out of PA + glass fiber black colour; chrome steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: Back gasket for shouldered shafts. Use of shouldered shafts allows a higher capability of axial load. Maximum shaft alignment error 2.5°.


BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; bearing made out of AISI 440C stainless steel; box quantity according to your request.

Square flanged bearing supports Type: SF/CA (SX/CA)

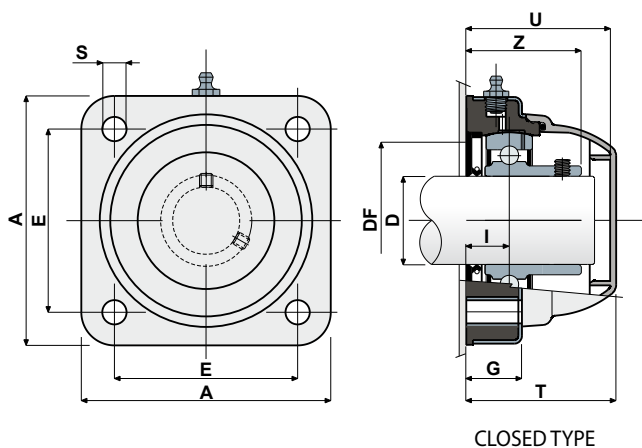

CLOSED TYPE

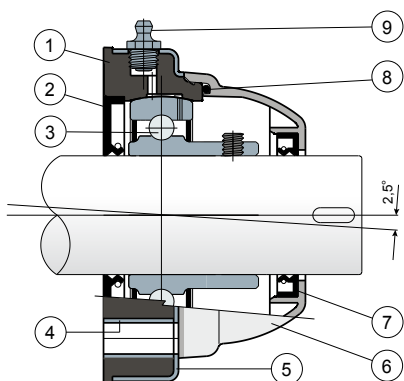

External cover made out of stainless steel AISI 304

OPEN TYPE

- 1) Internal body of support made out of polypropylene reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) External cover of support made out of AISI 304 stainless steel.
- 6) Protection cover made out of polypropylene (grey colour Ral 7042).
- 7) Front gasket made out of NBR rubber for turning shaft seal.
- 8) OR gasket made out of NBR rubber
- 9) Greaser for relubrication made out of nickel-plated brass.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																	
D	CLOSED Type	OPEN Type	CODES		DIMENSIONS (mm)								DF		Bearing load (N)		Support load
			Closed Code	Open Code	E	A	S	G	I	Z	U	T	Max	Min	C	C0	(N)
30	SF/CA 206	SF/CA 206A	CP000606	CP000609	83	113	11	27	20	41	65	68	60	50	19500	11300	17500
35	SF/CA 207	SF/CA 207A	CP000607	CP000610	83	113	11	27	19,5	45	65	68	70	55	25500	15300	18000
40	SF/CA 208	SF/CA 208A	CP000608	CP000611	83	113	11	27	19,5	48,5	65	68	78	65	32500	19800	18000

STAINLESS STEEL BEARING AISI 440C																	
D	CLOSED Type	OPEN Type	CODES		DIMENSIONS (mm)								DF		Charge roulement (N)		Charge support
			Closed Code	Open Code	E	A	S	G	I	Z	U	T	Max	Min	C	C0	(N)
30	SX/CA 206	SX/CA 206A	CP000612	CP000615	83	113	11	27	20	41	65	68	60	50	12500	11200	17500
35	SX/CA 207	SX/CA 207A	CP000613	CP000616	83	113	11	27	19,5	45	65	68	70	55	16600	15300	18000
40	SX/CA 208	SX/CA 208A	CP000614	CP000617	83	113	11	27	19,5	48,5	65	68	78	65	20000	19000	18000


MATERIALS: Support made out of PP + glass fiber; external cover of support made out of AISI 304 stainless steel; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings made out of AISI 304 stainless steel; gaskets made out of NBR rubber; protection cover made out of polypropylene grey colour RAL 7042.

FEATURES: Full protection of bearing against external agents. Support body made out of polypropylene covered by an AISI 304 stainless steel later, to obtain the maximum chemical resistance to antibacterial detergents used in food processing field. More over this part is moulded without internal cavities in order to obtain the best sanification. Assembly with not shouldered shaft. Maximum shaft alignment error 2.5°.


BOX QUANTITY: 8 pieces.

ON REQUEST: Protection cover in different colours and with personalized brand; box quantity according to your request.


Square flanged bearing supports Type: SF/CXA (SX/CXA)

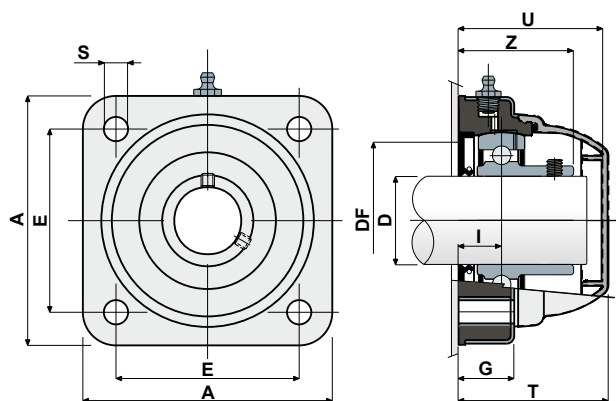

CLOSED TYPE



OPEN TYPE

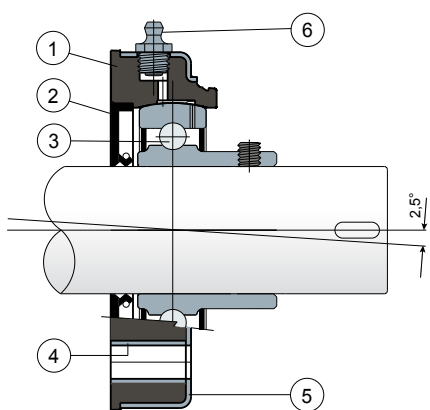

External cover made out of stainless steel AISI 304,
without protection cover.

- 1) Internal body of support made out of polypropylene reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) External cover of support made out of AISI 304 stainless steel.
- 6) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from SF/CA (SX/CA) series is lack of protection cover, which can be ordered separately as an accessory.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																			
D	Type	Support CODES	DIMENSIONS (mm)									Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES		
			E	A	S	G	I	Z	U	T	DF		C	C0			(N)	Closed Code	Open Code
											Max	Min							
30	SF/CXA 206	CP000618	83	113	11	27	20	41	65	68	60	50	19500	11300	17500		CF 206 A	CP002016	
35	SF/CXA 207	CP000619	83	113	11	27	19,5	45	65	68	70	55	25500	15300	18000	CF 207	CF 207 A	CP002017	
40	SF/CXA 208	CP000620	83	113	11	27	19,5	48,5	65	68	78	65	32500	19800	18000		CF 208 A	CP002018	

STAINLESS STEEL BEARING AISI 440C																			
D	Type	Support CODES	DIMENSIONS (mm)									Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES		
			E	A	S	G	I	Z	U	T	DF		C	C0			(N)	Closed Code	Open Code
											Max	Min							
30	SX/CXA 206	CP000621	83	113	11	27	20	41	65	68	60	50	12500	11200	17500		CF 206 A	CP002016	
35	SX/CXA 207	CP000622	83	113	11	27	19,5	45	65	68	70	55	16600	15300	18000	CF 207	CF 207 A	CP002017	
40	SX/CXA 208	CP000623	83	113	11	27	19,5	48,5	65	68	78	65	20000	19000	18000		CF 208 A	CP002018	



MATERIALS: Support made out of PP + glass fiber; external cover of support made out of AISI 304 stainless steel; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings made out of AISI 304 stainless steel; gaskets made out of NBR rubber; protection cover made out of polypropylene grey colour RAL 7042.

FEATURES: The only difference from SF/CA (SX/CA) series is lack of protection cover, which can be ordered separately as an accessory. Support body made out of polypropylene covered by an AISI 304 stainless steel layer, to obtain the maximum chemical resistance to antibacterial detergents used in food processing field. Moreover this part is moulded without internal cavities in order to obtain the best sanitification. Assembly with not shouldered shaft. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Protection cover in different colours and with personalized brand; box quantity according to your request.

Oval flanged bearing supports Type: SFL/C (SXL/C)

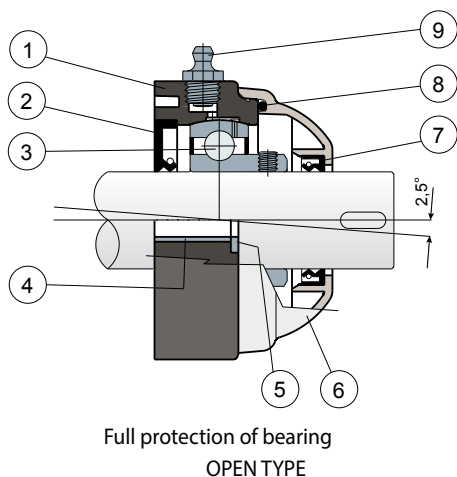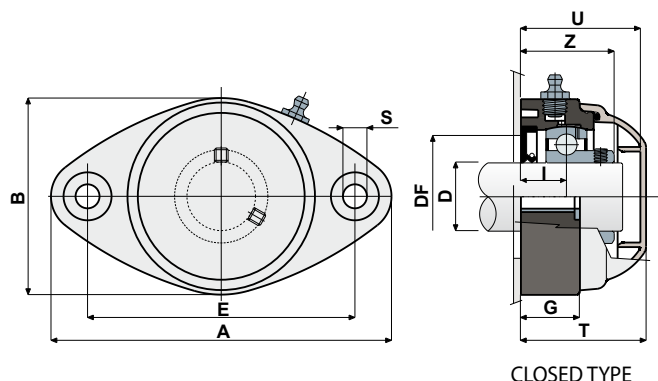

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Protection cover made out of polypropylene (grey colour Ral 7042).
- 7) Front gasket made out of NBR rubber for turning shaft seal.
- 8) OR gasket made out of NBR rubber
- 9) Greaser for relubrication made out of nickel-plated brass.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																		
D	CLOSED Type	OPEN Type	CODES		DIMENSIONS (mm)										Bearing load (N)		Support load	
			Closed Code	Open Code	E	A	B	S	G	I	Z	U	T	DF Max Min	C	C0	(N)	
20	SFL/C 204	SFL/C 204A	CP000624	CP000628	90	118	64	10,5	19	15,5	33,5	44	46,5	45 40	12800	6600	8500	
25	SFL/C 205	SFL/C 205A	CP000625	CP000629	99	131	72	10,5	22	17	36	47	49	50 45	14000	7800	10000	
30	SFL/C 206	SFL/C 206A	CP000626	CP000630	117	149	86	10,5	26	20	41	54	56	60 50	19500	11300	13000	
35	SFL/C 207	SFL/C 207A	CP000627	CP000631	130	163	94	10,5	26	20	45	57	59	70 55	25500	15300	14000	

STAINLESS STEEL BEARING AISI 440C																		
D	CLOSED Type	OPEN Type	CODES		DIMENSIONS (mm)										Bearing load (N)		Support load	
			Closed Code	Open Code	E	A	B	S	G	I	Z	U	T	DF Max Min	C	C0	(N)	
20	SXL/C 204	SXL/C 204A	CP000632	CP000636	90	118	64	10,5	19	15,5	33,5	44	46,5	45 40	8300	6550	8500	
25	SXL/C 205	SXL/C 205A	CP000633	CP000637	99	131	72	10,5	22	17	36	47	49	50 45	9150	7800	10000	
30	SXL/C 206	SXL/C 206A	CP000634	CP000638	117	149	86	10,5	26	20	41	54	56	60 50	12500	11200	13000	
35	SXL/C 207	SXL/C 207A	CP000635	CP000639	130	163	94	10,5	26	20	45	57	59	70 55	16600	15300	14000	



MATERIALS: Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: Full protection of bearing against external agents. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; box quantity according to your request.

Oval flanged bearing supports Type: SFL/CX (SXL/CX)

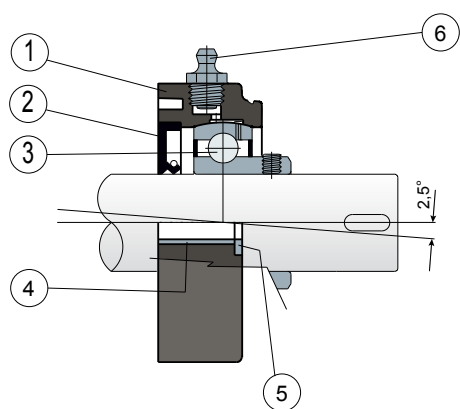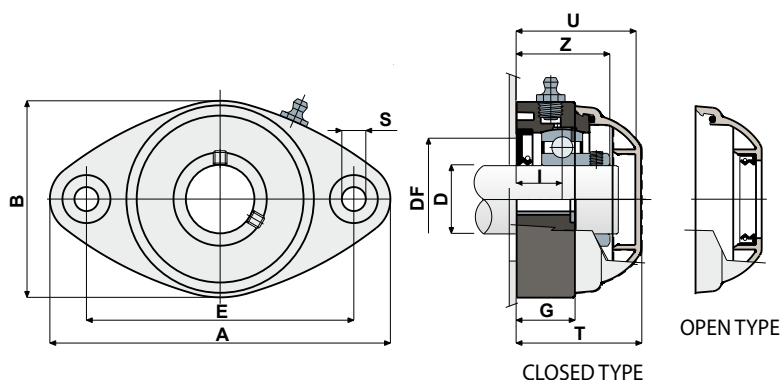

Without protection cover

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from SFL/C (SXL/C) series is lack of protection cover, which can be ordered separately as an accessory.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																				
D	Type	CODES Support	DIMENSIONS (mm)											Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)			Closed Code	Open Code
												Max	Min							
20	SFL/CX 204	CP000640	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	8500	CF 204	CF 204 A	CP002004	CP002014
25	SFL/CX 205	CP000641	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000	CF 205	CF 205 A	CP002005	CP002015
30	SFL/CX 206	CP000642	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000	CF 206	CF 206 A	CP002006	CP002016
35	SFL/CX 207	CP000643	130	163	94	10,5	26	20	45	57	59	70	55	25500	15300	14000	CF 207	CF 207 A	CP002007	CP002017

STAINLESS STEEL BEARING AISI 440C																				
D	Type	CODES Support	DIMENSIONS (mm)										Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES		
			E	A	B	S	G	I	Z	U	T	DF		C	C0			(N)	Closed Code	Open Code
												Max	Min							
20	SXL/CX 204	CP000644	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	8300	6550	8500	CF 204	CF 204 A	CP002004	CP002014
25	SXL/CX 205	CP000645	99	131	72	10,5	22	17	36	47	49	50	45	9150	7800	10000	CF 205	CF 205 A	CP002005	CP002015
30	SXL/CX 206	CP000646	117	149	86	10,5	26	20	41	54	56	60	50	12500	11200	13000	CF 206	CF 206 A	CP002006	CP002016
35	SXL/CX 207	CP000647	130	163	94	10,5	26	20	45	57	59	70	55	16600	15300	14000	CF 207	CF 207 A	CP002007	CP002017

MATERIALS: Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.


FEATURES: The difference from SFL/C (SXL/C) series is lack of protection cover which can be ordered separately as an accessory.

Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.


BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; box quantity according to your request.

Oval flanged bearing supports Type: SFL (SXL)

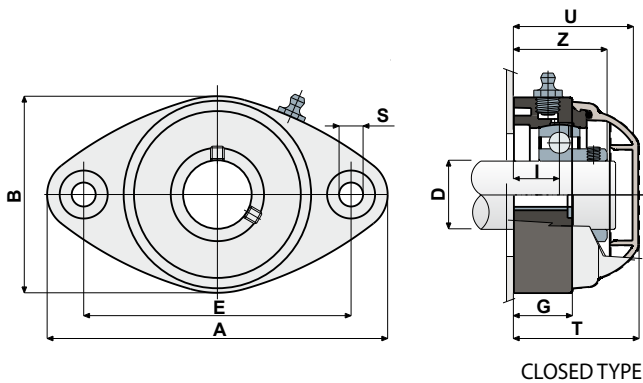

OPEN TYPE

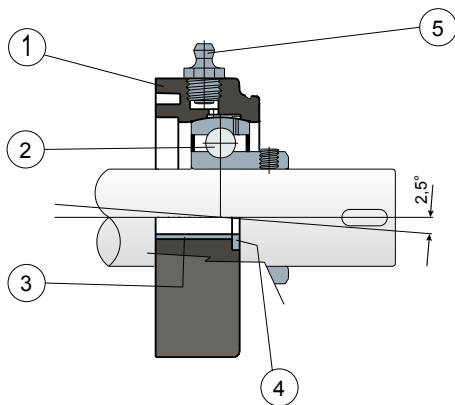

Without cover and back gasket

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Chrome steel or stainless steel bearing AISI 440C.
- 3) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 4) UNI 6592 support washer made out of stainless steel AISI 304.
- 5) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from SFL/C (SXL/C) series is lack of back gasket and protection cover, which can be ordered separately as accessories.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																		
D	Type	Support CODES	DIMENSIONS (mm)									Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	B	S	G	I	Z	U	T	C	C0	(N)			Closed Code	Open Codet
20	SFL 204	CP000648	90	118	64	10,5	19	15,5	33,5	44	46,5	12800	6600	8500	SF 204	SF 204 A	CP002004	CP002014
25	SFL 205	CP000649	99	131	72	10,5	22	17	36	47	49	14000	7800	10000	SF 205	SF 205 A	CP002005	CP002015
30	SFL 206	CP000650	117	149	86	10,5	26	20	41	54	56	19500	11300	13000	SF 206	SF 206 A	CP002006	CP002016
35	SFL 207	CP000651	130	163	94	10,5	26	20	45	57	59	25500	15300	14000	SF 207	SF 206 A	CP002007	CP002017

STAINLESS STEEL BEARING AISI 440C																		
D	Type	Support CODES	DIMENSIONS (mm)									Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	B	S	G	I	Z	U	T	C	C0	(N)			Closed Code	Open Codet
20	SXL 204	CP000652	90	118	64	10,5	19	15,5	33,5	44	46,5	8500	6550	8500	SF 204	SF 204 A	CP002004	CP002014
25	SXL 205	CP000653	99	131	72	10,5	22	17	36	47	49	9150	7800	10000	SF 205	SF 205 A	CP002005	CP002015
30	SXL 206	CP000654	117	149	86	10,5	26	20	41	54	56	12500	11200	13000	SF 206	SF 206 A	CP002006	CP002016
35	SXL 207	CP000655	130	163	94	10,5	26	20	45	57	59	16600	15300	14000	SF 207	SF 206 A	CP002007	CP002017



MATERIALS: Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: The difference from SFL/C (SXL/C) series is lack of back gasket and protection cover, which can be ordered separately as accessories. Assembly with shouldered and not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; box quantity according to your request. couleur différente et avec logo personnalisé; conditionnement hors standard.

Oval flanged bearing supports Type: SFL/CS

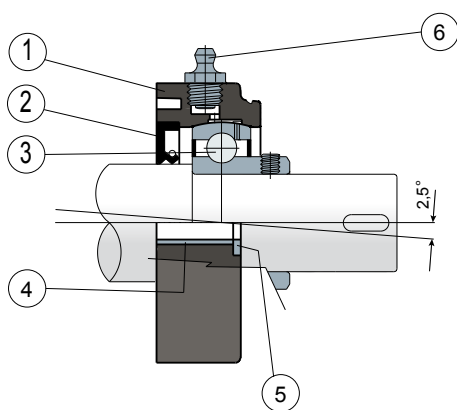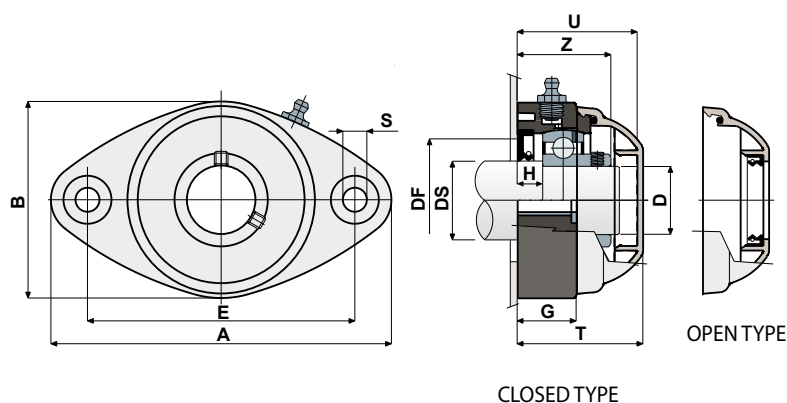

Back gasket for shouldered shaft

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser for relubrication made out of nickel-plated brass.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																					
DS	D	Type	Support CODES	DIMENSIONS (mm)										Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES		
				E	A	B	S	G	H	Z	U	T	DF		C	C0			(N)	Closed Code	Open Code
													Max	Min							
25	20	SFL/CS 204	CP000656	90	118	64	10,5	19	8,5	33,5	44	46,5	45	40	12800	6600	8500	CF 204	CF 204 A	CP002004	CP002014
30	25	SFL/CS 205	CP000657	99	131	72	10,5	22	10	36	47	49	50	45	14000	7800	10000	CF 205	CF 205 A	CP002005	CP002015
35	30	SFL/CS 206	CP000658	117	149	86	10,5	26	11,5	41	54	56	60	50	19500	11300	13000	CF 206	CF 206 A	CP002006	CP002016
40	35	SFL/CS 207	CP000659	130	163	94	10,5	26	10,5	45	57	59	70	55	25500	15300	14000	CF 207	CF 207 A	CP002007	CP002017


MATERIALS: Support made out of PA + glass fiber black colour; chrome steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: Back gasket for shouldered shafts. Use of shouldered shafts allows a higher capability of axial load. Maximum shaft alignment error 2,5°.


BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; bearing made out of AISI 440C stainless steel; box quantity according to your request.

Oval flanged bearing supports Type: MSFL/C (MSXL/C)

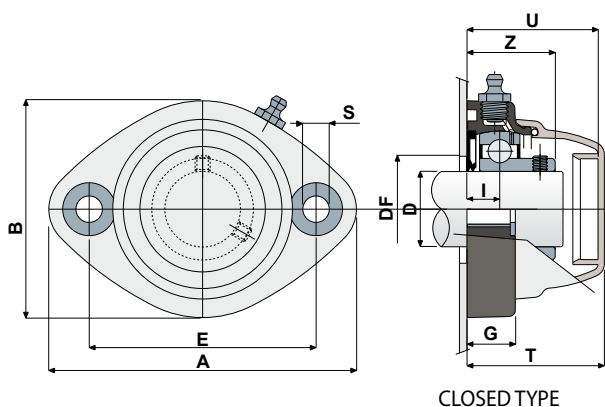

CLOSED TYPE

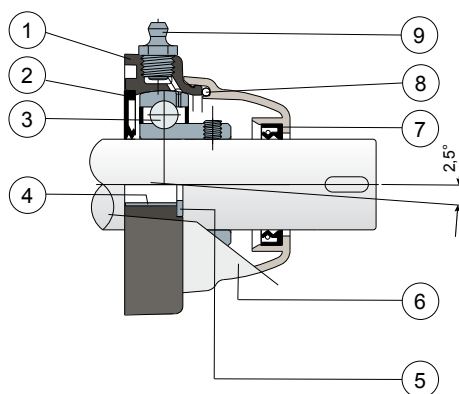

Full protection of bearing

OPEN TYPE

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Protection cover made out of polypropylene (grey colour Ral 7042).
- 7) Front gasket made out of NBR rubber for turning shaft seal.
- 8) OR gasket made out of NBR rubber
- 9) Greaser for relubrication made out of nickel-plated brass.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																		
D	CLOSED Type	OPEN Type	CODES		DIMENSIONS (mm)										Bearing load (N)		Support load	
			Closed Code	Open Code	E	A	B	S	G	I	Z	U	T	DF Max Min	C	C0	(N)	
20	MSFL/C 204	MSFL/C 204 A	CP000660	CP000663	90	122	86	10,5	19	16	34	44	46,5	45 40	12800	6600	8500	
25	MSFL/C 205	MSFL/C 205 A	CP000661	CP000664	90	122	86	10,5	19	15,5	35	44	46,5	50 45	14000	7800	10000	
30	MSFL/C 20	MSFL/C 206 A	CP000662	CP000665	90	122	86	10,5	19	13	35	52	54,5	60 50	19500	11300	13000	

STAINLESS STEEL BEARING AISI 440C																		
D	CLOSED Type	OPEN Type	CODES		DIMENSIONS (mm)										Bearing load (N)		Support load	
			Closed Code	Open Code	E	A	B	S	G	I	Z	U	T	DF Max Min	C	C0	(N)	
20	MSXL/C 204	MSXL/C 204 A	CP000666	CP000669	90	122	86	10,5	19	16	34	44	46,5	45 40	12800	6600	8500	
25	MSXL/C 205	MSXL/C 205 A	CP000667	CP000670	90	122	86	10,5	19	15,5	35	44	46,5	50 45	14000	7800	10000	
30	MSXL/C 206	MSXL/C 206 A	CP000668	CP000671	90	122	86	10,5	19	13	35	52	54,5	60 50	19500	11300	13000	



MATERIALS: Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing, greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: Full protection of bearing against external agents. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; box quantity according to your request.

Oval flanged bearing supports Type: MSFL/CX (MSXL/CX)

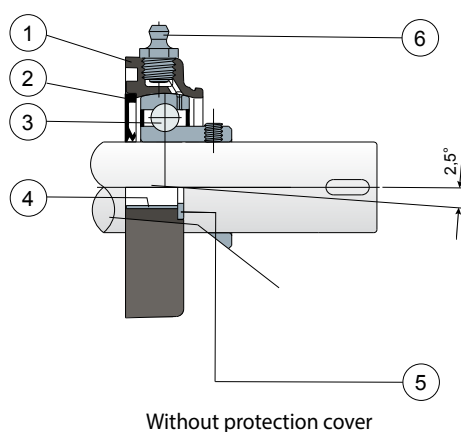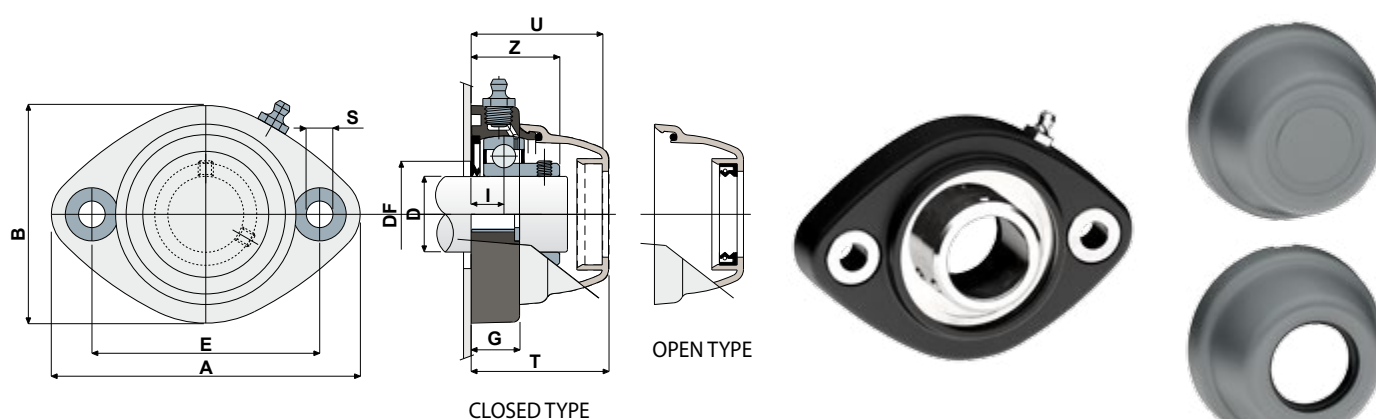

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from MSFL/C (MSXL/C) series is lack of protection cover, which can be ordered separately as an accessory.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																			
D	Type	Support CODES	DIMENSIONS (mm)										Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	B	S	G	I	Z	U	T	DF Max Min	C	C0	(N)			Closed Code	Open Code
20	MSFL/CX 204	CP000672	90	122	86	10,5	19	16	34	44	46,5	45 40	12800	6600	8500	SF 204	SF 204 A	CP002004	CP002014
25	MSFL/CX 205	CP000673	90	122	86	10,5	19	15,5	35	44	46,5	50 45	14000	7800	10000	SF 205	SF 205 A	CP002005	CP002015
30	MSFL/CX 206	CP000674	90	122	86	10,5	19	13	35	52	54,5	60 50	19500	11300	13000	SF 206	SF 206 A	CP002006	CP002016

STAINLESS STEEL BEARING AISI 440C																			
D	Type	Support CODES	DIMENSIONS (mm)										Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	B	S	G	I	Z	U	T	DF Max Min	C	C0	(N)			Closed Code	Open Code
20	MSXL/CX 204	CP000675	90	122	86	10,5	19	16	34	44	46,5	45 40	12800	6600	8500	SF 204	SF 204 A	CP002004	CP002014
25	MSXL/CX 205	CP000676	90	122	86	10,5	19	15,5	35	44	46,5	50 45	14000	7800	10000	SF 205	SF 205 A	CP002005	CP002015
30	MSXL/CX 206	CP000677	90	122	86	10,5	19	13	35	52	54,5	60 50	19500	11300	13000	SF 206	SF 206 A	CP002006	CP002016



MATERIALS: Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: The difference from MSFL/C (MSXL/C) series is lack of protection cover which can be ordered separately as an accessory. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; box quantity according to your request.

Oval flanged bearing supports Type: MSFL (MSXL)

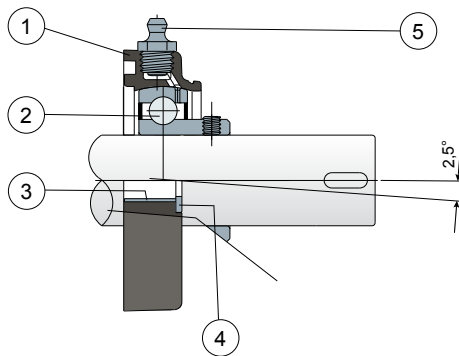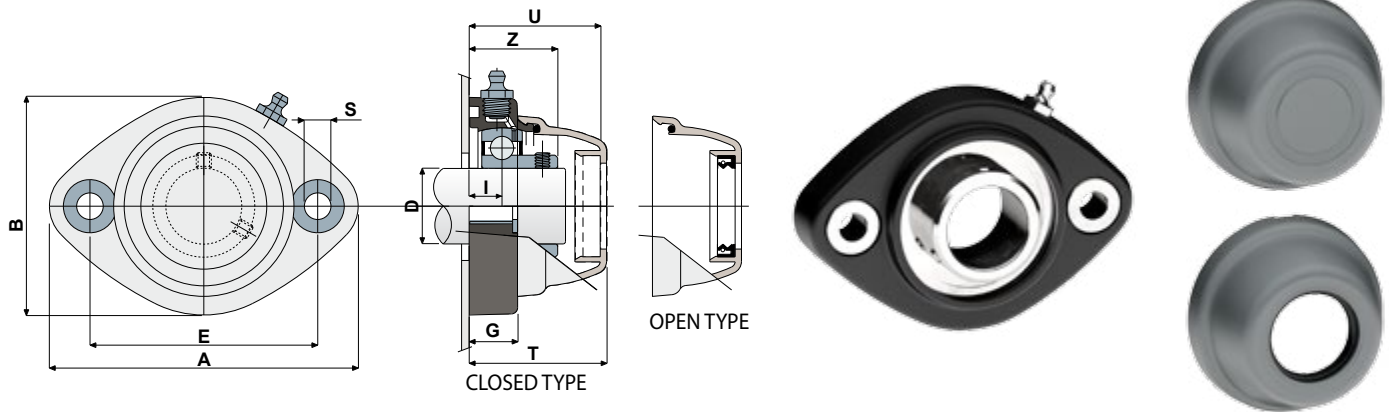

Without cover and back gasket

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Chrome steel or stainless steel bearing AISI 440C.
- 3) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 4) UNI 6592 support washer made out of stainless steel AISI 304.
- 5) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from MSFL/C (MSXL/C) series is lack of back gasket and protection cover, which can be ordered separately as accessories.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																		
D	Type	Support CODES	DIMENSIONS (mm)									Bearing load (N)		Support load (N)	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	B	S	G	I	Z	U	T	C	C0				Closed Code	Open Codet
20	MSFL 204	CP000678	90	122	86	10,5	19	16	34	44	46,5	12800	6600	8500	SF 204	SF 204 A	CP002004	CP002014
25	MSFL 205	CP000679	90	122	86	10,5	19	15,5	35	44	46,5	14000	7800	10000	SF 205	SF 205 A	CP002005	CP002015
30	MSFL 206	CP000680	90	122	86	10,5	19	13	35	52	54,5	19500	11300	13000	SF 206	SF 206 A	CP002006	CP002016

STAINLESS STEEL BEARING AISI 440C																		
D	Type	Support CODES	DIMENSIONS (mm)									Bearing load (N)		Support load (N)	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	B	S	G	I	Z	U	T	C	C0				Closed Code	Open Codet
20	MSXL 204	CP000681	90	122	86	10,5	19	16	34	44	46,5	12800	6600	8500	SF 204	SF 204 A	CP002004	CP002014
25	MSXL 205	CP000682	90	122	86	10,5	19	15,5	35	44	46,5	14000	7800	10000	SF 205	SF 205 A	CP002005	CP002015
30	MSXL 206	CP000683	90	122	86	10,5	19	13	35	52	54,5	19500	11300	13000	SF 206	SF 206 A	CP002006	CP002016



MATERIALS: Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: The difference from MSFL/C (MSXL/C) series is lack of back gasket and protection cover, which can be ordered separately as accessories. Assembly with shouldered and not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; box quantity according to your request.

Side flanged bearing supports Type: SFB/C (SXB/C)

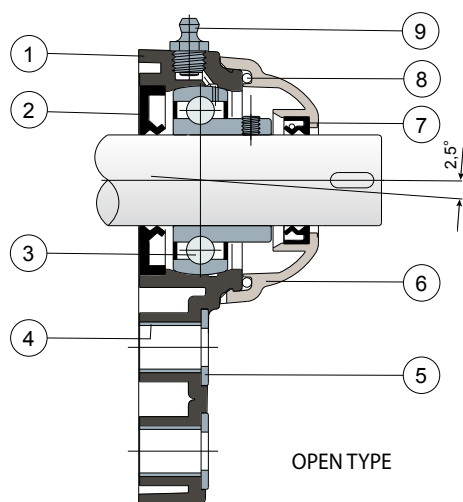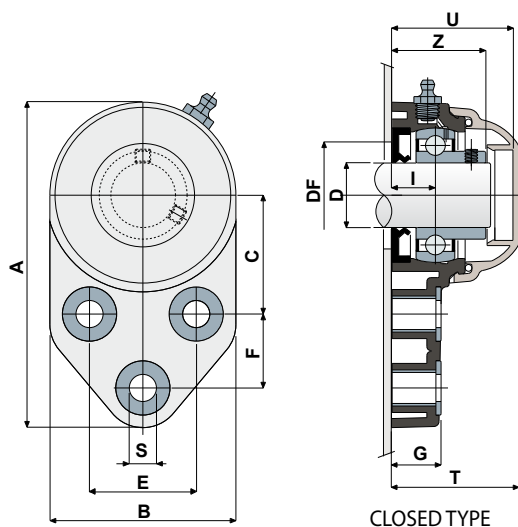

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Protection cover made out of polypropylene (grey colour Ral 7042).
- 7) Front gasket made out of NBR rubber for turning shaft seal.
- 8) OR gasket made out of NBR rubber
- 9) Greaser for relubrication made out of nickel-plated brass.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																				
D	CLOSED Type	OPEN Type	CODES		DIMENSIONS (mm)													Bearing load (N)		Support load
			Closed Code	Open Code	E	A	B	C	F	S	G	I	Z	U	T	DF		C	C0	(N)
																Max	Min			
20	SFB/C 204	SFB/C 204 A	CP000684	CP000687	41,3	125	72	46	28,6	10,5	19	18	36	47	49,5	45	40	12800	6600	8500
25	SFB/C 205	SFB/C 205 A	CP000685	CP000688	41,3	125	72	46	28,6	10,5	19	17	36,5	47	49,5	50	45	14000	7800	9000
40	SFB/C 208	SFB/C 208 A	CP000686	CP000689	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	78	65	32500	19800	18000

STAINLESS STEEL BEARING AISI 440C																				
D	CLOSED Type	OPEN Type	CODES		DIMENSIONS (mm)													Bearing load (N)		Support load
			Code Fermé	Code Ouvert	E	A	B	C	F	S	G	I	Z	U	T	DF		C	C0	(N)
																Max	Min			
20	SXB/C 204	SXB/C 204 A	CP000690	CP000693	41,3	125	72	46	28,6	10,5	19	17,5	35,5	47	49,5	45	40	12800	6600	8500
25	SXB/C 205	SXB/C 205 A	CP000691	CP000694	41,3	125	72	46	28,6	10,5	19	17	36,5	47	49,5	50	45	14000	7800	9000
40	SXB/C 208	SXB/C 208 A	CP000692	CP000695	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	78	65	32500	19800	18000


MATERIALS: Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing, greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: Full protection of bearing against external agents. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; box quantity according to your request.

Side flanged bearing supports Type: SFB/CX (SXB/CX)

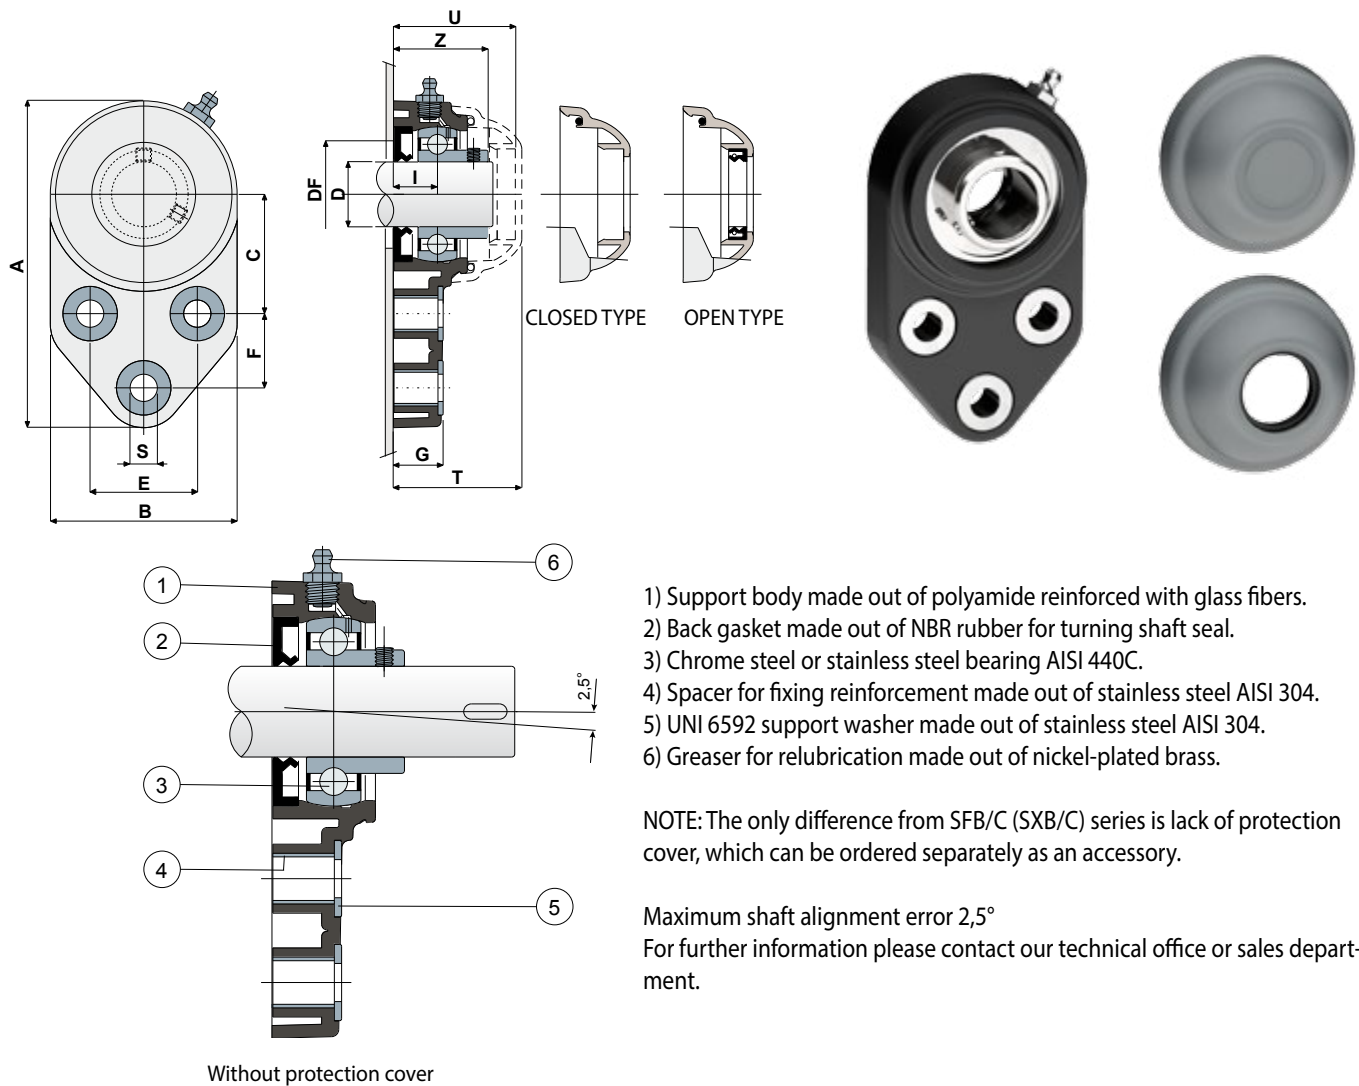

CHROME STEEL BEARING																						
D	Type	Support CODES	DIMENSIONS (mm)												Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES		
			E	A	B	C	F	S	G	I	Z	U	T	DF		C	C0			(N)	Closed Code	Open Code
														Max	Min							
20	SFB/CX 204	CP000696	41,3	125	72	46	28,6	10,5	19	18	36	47	49,5	45	40	12800	6600	8500	SF 204	SF 204 A	CP002004	CP002014
25	SFB/CX 205	CP000697	41,3	125	72	46	28,6	10,5	19	17	36,5	47	49,5	50	45	14000	7800	9000	SF 205	SF 205 A	CP002005	CP002015
40	SFB/CX 208	CP000698	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	78	65	32500	19800	18000	SF 208	SF 208 A	CP002008	CP002018

STAINLESS STEEL BEARING AISI 440C																						
D	Type	Support CODES	DIMENSIONS (mm)												Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES		
			E	A	B	C	F	S	G	I	Z	U	T	DF		C	C0			(N)	Closed Cover	Open Code
														Max	Min							
20	SXB/CX 204	CP000699	41,3	125	72	46	28,6	10,5	19	18	36	47	49,5	45	40	12800	6600	8500	SF 204	SF 204 A	CP002004	CP002014
25	SXB/CX 205	CP000700	41,3	125	72	46	28,6	10,5	19	17	36,5	47	49,5	50	45	14000	7800	9000	SF 205	SF 205 A	CP002005	CP002015
40	SXB/CX 208	CP000701	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	78	65	32500	19800	18000	SF 208	SF 208 A	CP002008	CP002018

MATERIALS: Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.



FEATURES: The difference from SFB/C (SXB/C) series is lack of protection cover which can be ordered separately as an accessory.

Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; box quantity according to your request.

Side flanged bearing supports Type: SFB (SXB)

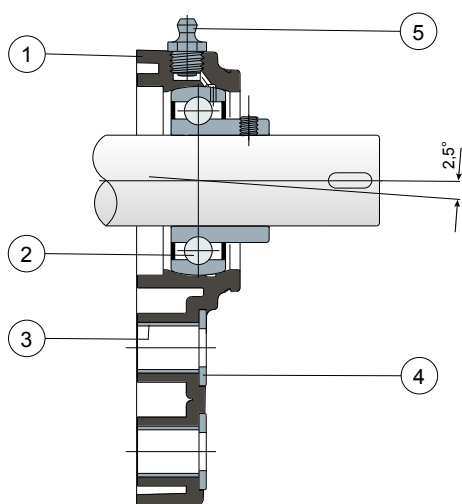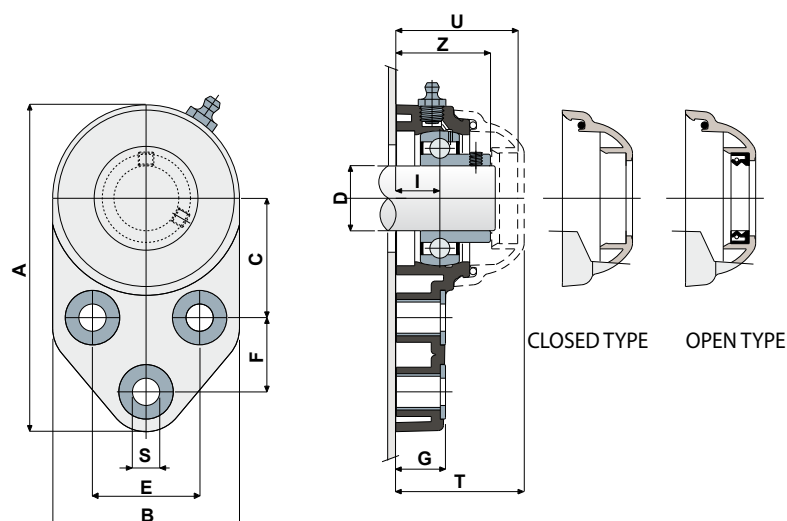

Without cover and back gasket

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Chrome steel or stainless steel bearing AISI 440C.
- 3) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 4) UNI 6592 support washer made out of stainless steel AISI 304.
- 5) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from SFB/C (SXB/C) series is lack of back gasket and protection cover, which can be ordered separately as accessories.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																				
D	Type	CODES Support	DIMENSIONS (mm)											Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	B	C	F	S	G	I	Z	U	T	C	C0	(N)			Closed Cover	Open Cover
20	SFB 204	CP000702	41,3	125	72	46	28,6	10,5	19	18	36	47	49,5	12800	6600	8500	SF 204	SF 204 A	CP002004	CP002014
25	SFB 205	CP000703	41,3	125	72	46	28,6	10,5	19	17	36,5	47	49,5	14000	7800	9000	SF 205	SF 205 A	CP002005	CP002015
40	SFB 208	CP000704	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	32500	19800	18000	SF 208	SF 208 A	CP002008	CP002018

STAINLESS STEEL BEARING AISI 440C																				
D	Type	CODES Support	DIMENSIONS (mm)											Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	B	C	F	S	G	I	Z	U	T	C	C0	(N)			Closed Cover	Open Cover
	SXB 204	CP000705	41,3	125	72	46	28,6	10,5	19	18	36	47	49,5	12800	6600	8500	SF 204	SF 204 A	CP002004	CP002014
	SXB 205	CP000706	41,3	125	72	46	28,6	10,5	19	17	36,5	47	49,5	14000	7800	9000	SF 205	SF 205 A	CP002005	CP002015
	SXB 208	CP000707	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	32500	19800	18000	SF 208	SF 208 A	CP002008	CP002018

MATERIALS: Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: The difference from SFB/C (SXB/C) series is lack of back gasket and protection cover, which can be ordered separately as accessories. Assembly with shouldered and not shouldered shafts. Maximum shaft alignment error 2.5°.


BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; box quantity according to your request.

SUPPORT FEET AND THREADED BUSHINGS

		 Wrench 25 PF 1/PFX 1 page 100	 Ø 40 PF 2/PFX 2 page 100	 Ø 25 PF 3/PFX 3 page 100	 Ø 40 PF 4/PFX 4 page 101
		 Ø 60 PS 1 page 101	 60x95 PS 2 page 102	 Ø 80 PS 3 page 102	 Ø 102 PS 4 page 102
		 Ø 40 PS 5/PSX 5 page 103	 Ø 50 PS 6/PSX 6 page 103	 Ø 60 PS 7/PSX 7 page 104	 60x95 PS 8/PSX 8 page 105
		 Ø 80 PS 9 page 106	 Ø 102 PS 10 page 107	 Ø 124 PS 11 page 108	 Ø 124 PS 12 page 109
 Ø 50 PO 1 page 110	 Ø 102 PO 2 page 110	 Ø 124 PO 3 page 111	 DT 1 page 111	 Ø 124 PO 4 page 112	 Ø 80 PO5 page 113
 Ø 113 PO6 page 113	 Ø 113 PO 7/POX 7 page 114	 Ø 180 PO 8 page 114	 Ø 80 PO 9/POX 9 pag. 115	 Ø 102 PO 10/POX 10 page 115	 Ø 124 PO 11/POX 11 page 116
 Ø 75 PO 12 page 116	 Ø 75 PO 13 page 117	 Ø 95 PO 14 page 117	 Ø 95 PO 15 page 118	 Ø 120 PO 16 page 118	 Ø 120 PO 17 page 119
 Ø 95 PO 18 page 119	 TP1 page 120	 TP 2 page 121	 TP 3 page 123	 TP 4 page 125	 TP 5 page 126
 sizes in mm	 sizes in mm	 sizes in inches	 sizes in inches		

Fixed feet (comoulded) wrench 25 Type: PF1

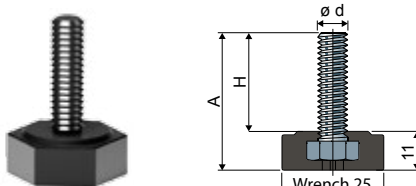

$\varnothing d$	A (mm)	H (mm)	Spindle in zinc plated steel		Max static load (N)
			Type	Code	
M8	38	27	PF1	CP000708	6000


Base material: Reinforced polyamide black colour.

Box quantity: 24 pieces.

On request


- Bases: In reinforced polypropylene • other colours.
- Rod: In stainless steel AISI 304.
- Box quantity: Not standard.

Washers UNI 6592-69 - Box quantity: 24 pieces.




$\varnothing d$ mm	8,4
S mm	1,6
$\varnothing A$ mm	17
Zinc plated steel codes	7636

Nuts UNI 5588-65 - Box quantity: 24 pieces.



$\varnothing d$	M8
S mm	6,5
Ch. mm	13
Zinc plated steel codes	7634

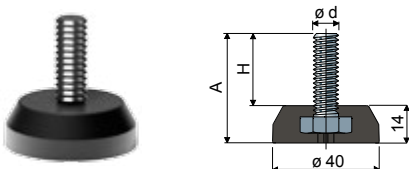Fixed feet (comoulded) $\varnothing 40$ Type: PF2

$\varnothing d$	A (mm)	H (mm)	Spindle in zinc plated steel		Max static load (N)
			Type	Code	
M10	40	26	PF2	CP000709	7000


Base material: Reinforced polyamide black colour.

Box quantity: 24 pieces.

On request


- Bases: In reinforced polypropylene • other colours.
- Rod: In stainless steel AISI 304.
- Box quantity: Not standard.

Washers UNI 6592-69 - Box quantity: 24 pieces.




$\varnothing d$ mm	10,5
S mm	2
$\varnothing A$ mm	21
Zinc plated steel codes	7283

Nuts UNI 5588-65 - Box quantity: 24 pieces.



$\varnothing d$	M10
S mm	8
Ch. mm	17
Zinc plated steel codes	7269

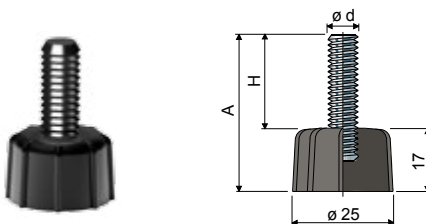Fixed feet (base in reinforced polyamide) $\varnothing 25$ Type: PF3 e PFX3

$\varnothing d$	A (mm)	H (mm)	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
			Type	Code	Type	Code	
M8	40	23	PF3A	CP000710	PFX3A	CP000715	4000
	50	33	PF3B	CP000711	PFX3B	CP000716	
M10	40	23	PF3C	CP000712	PFX3C	CP000717	5000
	50	33	PF3D	CP000713	PFX3D	CP000718	
M12	75	58	PF3E	CP000714	PFX3E	CP000719	6000


Base material: Reinforced polyamide black colour.

Box quantity: 24 pieces.

On request


- Bases: In reinforced polypropylene • other colours.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.

Washers UNI 6592-69 - Box quantity: 24 pieces.




$\varnothing d$ mm	8,4	10,5	13
S mm	1,6	2	2,5
$\varnothing A$ mm	17	21	24
Zinc plated steel codes	7636	7283	7284
Stainless steel codes	7637	7286	7287

Nuts UNI 5588-65 - Box quantity: 24 pieces.



$\varnothing d$	M8	M10	M12
S mm	6,5	8	10
Ch. mm	13	17	19
Zinc plated steel codes	7634	7269	7270
Stainless steel codes	7635	7272	7273

Fixed feet (base in reinforced polyamide) ø 40 Type: PF4 e PFX4

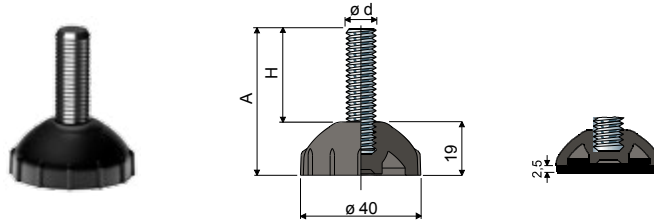

ø d	A (mm)	H (mm)	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
			Type	Code	Type	Code	
M8	40	21	PF4A	CP000720	PFX4A	CP000725	4000
	50	31	PF4B	CP000721	PFX4B	CP000726	
M10	40	21	PF4C	CP000722	PFX4C	CP000727	5000
	50	31	PF4D	CP000723	PFX4D	CP000728	
M12	75	56	PF4E	CP000724	PFX4E	CP000729	6000

Base material: Reinforced polyamide black colour.

Box quantity: 24 pieces.

Accessories


Anti-slip pads:

- code: 7263;

- material: soft PVC 68 shore black colour;


- box quantity: 24 pieces.

Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	8,4	10,5	13
Smm	1,6	2	2,5
ø A mm	17	21	24
Zinc plated steel codes	7636	7283	7284
Stainless steel codes	7637	7286	7287

Nuts UNI 5588-65 - Box quantity: 24 pieces.



ø d	M8	M10	M12
Smm	6,5	8	10
Ch. mm	13	17	19
Zinc plated steel codes	7634	7269	7270
Stainless steel codes	7635	7272	7273

On request

- Bases: In reinforced polypropylene • other colours.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.

Articulated feet (in reinforced polyamide) ø 60 Type: PS1



ø d	A (mm)	H (mm)	Wrench (mm)	Spindle and base in reinforced polyamide		Max static load (N)
				Type	Code	
M16	101	67	24	PS1A	CP000730	7000
M20	174	140	24	PS1B	CP000731	7500

Material base and spindle: Reinforced polyamide black colour.

Box quantity: 24 pieces.

Accessories


Anti-slip pads:

- code: 7265;

- material: soft PVC 68 shore black colour;


- box quantity: 24 pieces.

Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	17	21
Smm	3	3
ø A mm	30	37
Zinc plated steel codes	7289	7290
Stainless steel codes	7291	7292

Nuts UNI 5588-65 - Box quantity: 24 pieces.




ø d	M16	M20
Smm	13	16
Ch. mm	24	30
Zinc plated steel codes	7275	7276
Stainless steel codes	7277	7278

On request

- Bases: In reinforced polypropylene • other colours.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.

Articulated feet (in reinforced polyamide) 60 x 95 Type: PS 2

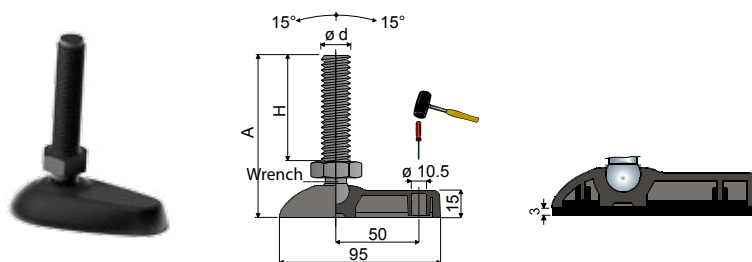


Accessories

Anti-slip pads:

- code: 7632;
- material: soft PVC 68 shore black colour;
- box quantity: 24 pieces.

ød	A (mm)	H (mm)	Wrench (mm)	Spindle and base in reinforced polyamide		Max static load (N)
				Type	Code	
M16	101	67	24	PS2A	CP000732	7000
M20	174	140	24	PS2B	CP000733	7500

Articulated feet (in reinforced polyamide) ø 80 Type: PS 3

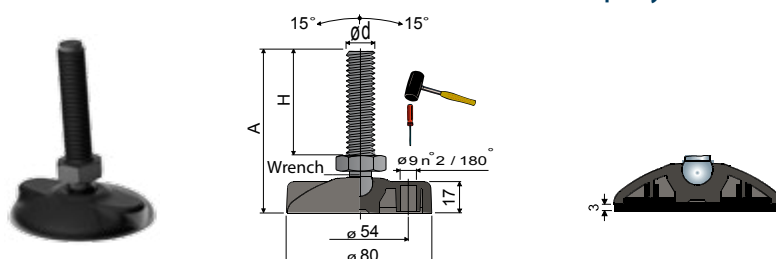


Accessories

Anti-slip pads:

- code: 7266;
- material: soft PVC 68 shore black colour;
- box quantity: 24 pieces.

ød	A (mm)	H (mm)	Wrench (mm)	Spindle and base in reinforced polyamide		Max static load (N)
				Type	Code	
M16	104	67	24	PS3A	CP000734	7000
M20	177	140	24	PS3B	CP000735	7500

Articulated feet (in reinforced polyamide) ø 102 Type: PS 4

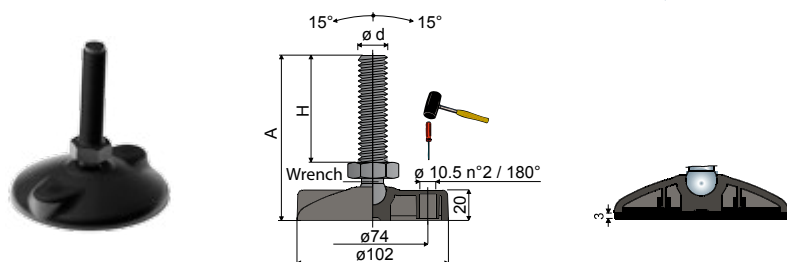

Accessories

Anti-slip pads:

- code: 7267;
- material: soft PVC 68 shore black colour;
- box quantity: 24 pieces.

ød	A (mm)	H (mm)	Wrench (mm)	Spindle and base in reinforced polyamide		Max static load (N)
				Type	Code	
M16	107	67	24	PS4A	CP000736	7000
M20	180	140	24	PS4B	CP000737	7500

Material base and spindle: Reinforced polyamide black colour.

Box quantity: 24 pieces.

On request

- Bases: In reinforced polypropylene • other colours.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.


Washers UNI 6592-69 - Box quantity: 24 pieces.

ø d mm	17	21
S mm	3	3
ø A mm	30	37
Zinc plated steel codes	7289	7290
Stainless steel codes	7291	7292

Nuts UNI 5588-65 - Box quantity: 24 pieces.

ø d	M16	M20
S mm	13	16
Ch. mm	24	30
Zinc plated steel codes	7275	7276
Stainless steel codes	7277	7278


Articulated feet (base in reinforced polyamide) ø 40 Type: PS 5 e PSX 5

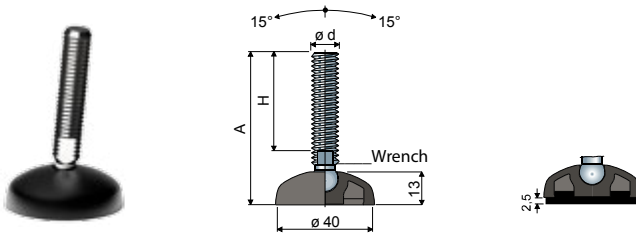

Accessories
Anti-slip pads:
- code: 7263;
- material: soft PVC 68 shore
black colour;
- box quantity: 24 pieces.

Spindle measures in mm and inches				Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
ød	A	H	Wrench	Type	Code	Type	Code	
M8	68	45	6	PS5A	CP000738	PSX5A	CP000753	10000
	88	65	6	PS5B	CP000739	PSX5B	CP000754	
	130	107	6	PS5C	CP000740	PSX5C	CP000755	
M10	60	35	8	PS5D	CP000741	PSX5D	CP000756	11000
	95	70	8	PS5E	CP000742	PSX5E	CP000757	
	140	115	8	PS5F	CP000743	PSX5F	CP000758	
M12	70	43	10	PS5G	CP000744	PSX5G	CP000759	12000
	90	63	10	PS5H	CP000745	PSX5H	CP000760	
	105	77	10	PS5I	CP000746	PSX5I	CP000761	
M14	120	93	10	PS5L	CP000747	PSX5L	CP000762	13000
	150	123	10	PS5M	CP000748	PSX5M	CP000763	
	90	61	12	PS5N	CP000749	PSX5N	CP000764	
1/2"-13 UNC	120	91	12	PS5O	CP000750	PSX5O	CP000765	12000
	145	116	12	PS5P	CP000751	PSX5P	CP000766	
	5,08	4	7/16"	PS5Q	CP000752	PSX5Q	CP000767	

Articulated feet (base in reinforced polyamide) ø 50 Type: PS 6 e PSX 6

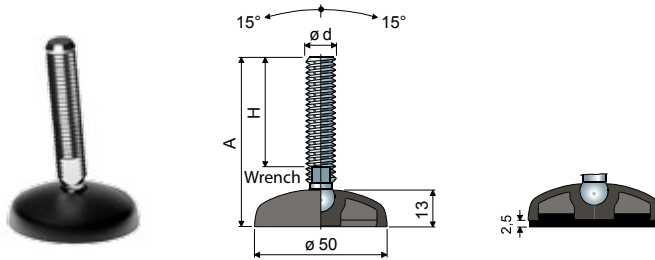

Accessories
Anti-slip pads:
- code: 7264;
- material: soft PVC 68 shore
black colour;
- box quantity: 24 pieces.

Spindle measures in mm and inches				Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
ød	A	H	Wrench	Type	Code	Type	Code	
M8	68	45	6	PS6A	CP000768	PSX6A	CP000783	11000
	88	65	6	PS6B	CP000769	PSX6B	CP000784	
	130	107	6	PS6C	CP000770	PSX6C	CP000785	
M10	60	35	8	PS6D	CP000771	PSX6D	CP000786	12000
	95	70	8	PS6E	CP000772	PSX6E	CP000787	
	140	115	8	PS6F	CP000773	PSX6F	CP000788	
M12	70	43	10	PS6G	CP000774	PSX6G	CP000789	13000
	90	63	10	PS6H	CP000775	PSX6H	CP000790	
	105	77	10	PS6I	CP000776	PSX6I	CP000791	
M14	120	93	10	PS6L	CP000777	PSX6L	CP000792	14000
	150	123	10	PS6M	CP000778	PSX6M	CP000793	
	90	61	12	PS6N	CP000779	PSX6N	CP000794	
1/2"-13 UNC	120	91	12	PS6O	CP000780	PSX6O	CP000795	12000
	145	116	12	PS6P	CP000781	PSX6P	CP000796	
	5,1	4	7/16"	PS6Q	CP000782	PSX6Q	CP000797	

Base material: Reinforced polyamide black colour.
Box quantity: 24 pieces.

On request

- Bases: In reinforced polypropylene • other colours.
- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard. • Assembling of: Anti-slip pads • nuts • washers.

Washers UNI 6592-69 - Box quantity: 24 pieces.

ø d mm	8,4	10,5	13	15
S mm	1,6	2	2,5	2,5
ø A mm	17	21	24	28
Zinc plated steel codes	7636	7283	7284	7285
Stainless steel codes	7637	7286	7287	7288

Nuts UNI 5588-65 - Box quantity: 24 pieces.

ø d	M8	M10	M12	M14
S mm	6,5	8	10	11
Ch. mm	13	17	19	22
Zinc plated steel codes	7634	7269	7270	7271
Stainless steel codes	7635	7272	7273	7274

Articulated feet (base in reinforced polyamide) ø60 Type: PS 7 e PSX 7



Spindle measures in mm								
ød	A	H	Wrench	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load
				Type	Code	Type	Code	(N)
M8	72	45	6	PS7A	CP000798	PSX7A	CP000826	12000
	92	65	6	PS7B	CP000799	PSX7B	CP000827	
	134	107	6	PS7C	CP000800	PSX7C	CP000828	
M10	64	35	8	PS7D	CP000801	PSX7D	CP000829	13000
	99	70	8	PS7E	CP000802	PSX7E	CP000830	
	144	115	8	PS7F	CP000803	PSX7F	CP000831	
M12	74	43	10	PS7G	CP000804	PSX7G	CP000832	14000
	94	63	10	PS7H	CP000805	PSX7H	CP000833	
	109	77	10	PS7I	CP000806	PSX7I	CP000834	
	124	93	10	PS7L	CP000807	PSX7L	CP000835	
	154	123	10	PS7M	CP000808	PSX7M	CP000836	
M14	94	61	12	PS7N	CP000809	PSX7N	CP000837	15000
	124	91	12	PS7O	CP000810	PSX7O	CP000838	
	149	116	12	PS7P	CP000811	PSX7P	CP000839	
M16	95	60	13	PS7Q	CP000812	PSX7Q	CP000840	17000
	125	90	13	PS7R	CP000813	PSX7R	CP000841	
	140	105	13	PS7S	CP000814	PSX7S	CP000842	
	160	125	13	PS7T	CP000815	PSX7T	CP000843	
	190	155	13	PS7U	CP000816	PSX7U	CP000844	
	200	165	13	PS7V	CP000817	PSX7V	CP000845	
M20	240	205	13	PS7Z	CP000818	PSX7Z	CP000846	19000
	125	86	17	PS7W	CP000819	PSX7W	CP000847	
	155	116	17	PS7X	CP000820	PSX7X	CP000848	
	180	141	17	PS7Y	CP000821	PSX7Y	CP000849	
	245	206	17	PS7J	CP000822	PSX7J	CP000850	

Spindle measures in inches								
ød	A	H	Wrench	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load
				Type	Code	Type	Code	(N)
1/2"-13 UNC	5,24	4	7/16"	PS7α	CP000823	PSX7α	CP000851	14000
5/8"-11 UNC	8,36	7	1/2"	PS7β	CP000824	PSX7β	CP000852	17000
3/4"-10 UNC	8,43	7	5/8"	PS7γ	CP000825	PSX7γ	CP000853	19000

Base material: Reinforced polyamide black colour.

Box quantity: 24 pieces.

Accessories

Anti-slip pads:

- code: 7265;

- material: soft PVC 68 shore black colour;

- box quantity: 24 pieces.

Washers UNI 6592-69 - Box quantity: 24 pieces.

ø d mm	8,4	10,5	13	15	17	21
S mm	1,6	2	2,5	2,5	3	3
ø A mm	17	21	24	28	30	37
Zinc plated steel codes	7636	7283	7284	7285	7289	7290
Stainless steel codes	7637	7286	7287	7288	7291	7292


Nuts UNI 5588-65 - Box quantity: 24 pieces.

ø d	M8	M10	M12	M14	M16	M20
S mm	6,5	8	10	11	13	16
Ch. mm	13	17	19	22	24	30
Zinc plated steel codes	7634	7269	7270	7271	7275	7276
Stainless steel codes	7635	7272	7273	7274	7277	7278

On request

- Bases: In reinforced polypropylene • other colours.
- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.

Articulated feet (base in reinforced polyamide) 60x95 Type: PS 8 e PSX 8

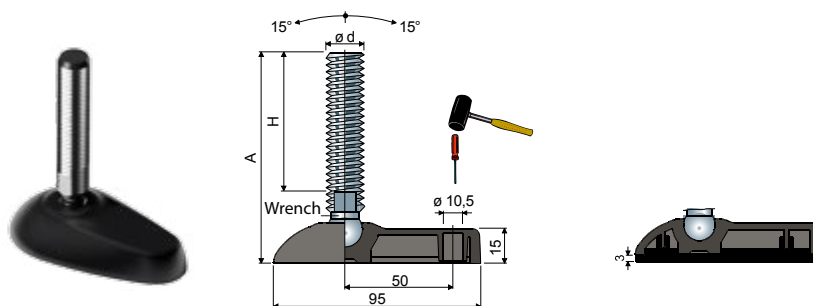

Spindle measures in mm								
ød	A	H	Wrench	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load
				Type	Code	Type	Code	(N)
M8	72	45	6	PS8A	CP000854	PSX7A	CP000882	12000
	92	65	6	PS8B	CP000855	PSX8B	CP000883	
	134	107	6	PS8C	CP000856	PSX8C	CP000884	
M10	64	35	8	PS8D	CP000857	PSX8D	CP000885	13000
	99	70	8	PS8E	CP000858	PSX8E	CP000886	
	144	115	8	PS8F	CP000859	PSX8F	CP000887	
M12	74	43	10	PS8G	CP000860	PSX8G	CP000888	14000
	94	63	10	PS8H	CP000861	PSX8H	CP000889	
	109	77	10	PS8I	CP000862	PSX8I	CP000890	
	124	93	10	PS8L	CP000863	PSX8L	CP000891	
	154	123	10	PS8M	CP000864	PSX8M	CP000892	
M14	94	61	12	PS8N	CP000865	PSX8N	CP000893	15000
	124	91	12	PS8O	CP000866	PSX8O	CP000894	
	149	116	12	PS8P	CP000867	PSX8P	CP000895	
M16	95	60	13	PS8Q	CP000868	PSX8Q	CP000896	17000
	125	90	13	PS8R	CP000869	PSX8R	CP000897	
	140	105	13	PS8S	CP000870	PSX8S	CP000898	
	160	125	13	PS8T	CP000871	PSX8T	CP000899	
	190	155	13	PS8U	CP000872	PSX8U	CP000900	
	200	165	13	PS8V	CP000873	PSX8V	CP000901	
	240	205	13	PS8Z	CP000874	PSX8Z	CP000902	
M20	125	86	17	PS8W	CP000875	PSX8W	CP000903	19000
	155	116	17	PS8X	CP000876	PSX8X	CP000904	
	180	141	17	PS8Y	CP000877	PSX8Y	CP000905	
	245	206	17	PS8J	CP000878	PSX8J	CP000906	

Spindle measures in inches								
ød	A	H	Wrench	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load
				Type	Code	Type	Code	(N)
1/2"-13 UNC	5,24	4	7/16"	PS8α	CP000879	PSX8α	CP000907	14000
5/8"-11 UNC	8,38	7	1/2"	PS8β	CP000880	PSX8β	CP000908	17000
3/4"-10 UNC	8,47	7	5/8"	PS8γ	CP000881	PSX8γ	CP000909	19000

Base material: Reinforced polyamide black colour.

Box quantity: 24 pieces.

Accessories

Anti-slip pads:

- code: 7632;
- material: soft PVC 68 shore black colour;
- box quantity: 24 pieces.

Washers UNI 6592-69 - Box quantity: 24 pieces.

ød mm	8,4	10,5	13	15	17	21
Smm	1,6	2	2,5	2,5	3	3
øA mm	17	21	24	28	30	37
Zinc plated steel codes	7636	7283	7284	7285	7289	7290
Stainless steel codes	7637	7286	7287	7288	7291	7292


Nuts UNI 5588-65 - Box quantity: 24 pieces.

ød	M8	M10	M12	M14	M16	M20
Smm	6,5	8	10	11	13	16
Ch. mm	13	17	19	22	24	30
Zinc plated steel codes	7634	7269	7270	7271	7275	7276
Stainless steel codes	7635	7272	7273	7274	7277	7278

On request

- Bases: In reinforced polypropylene • other colours • with prebored fixing holes.
- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.

Articulated feet (base in reinforced polyamide) ø 80 Type: PS 9



Spindle measures in mm				Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
ø d	A	H	Wrench	Type	Code	Type	Code	
M8	74	45	6	PS9A	CP000910	PSX9A	CP000943	12000
	94	65	6	PS9B	CP000911	PSX9B	CP000944	
	136	107	6	PS9C	CP000912	PSX9C	CP000945	
M10	66	35	8	PS9D	CP000913	PSX9D	CP000946	14000
	101	70	8	PS9E	CP000914	PSX9E	CP000947	
	146	115	8	PS9F	CP000915	PSX9F	CP000948	
M12	76	43	10	PS9G	CP000916	PSX9G	CP000949	15000
	96	63	10	PS9H	CP000917	PSX9H	CP000950	
	111	77	10	PS9I	CP000918	PSX9I	CP000951	
	126	93	10	PS9L	CP000919	PSX9L	CP000952	
M14	156	123	10	PS9M	CP000920	PSX9M	CP000953	16000
	96	61	12	PS9N	CP000921	PSX9N	CP000954	
	126	91	12	PS9O	CP000922	PSX9O	CP000955	
M16	151	116	12	PS9P	CP000923	PSX9P	CP000956	19000
	97	60	13	PS9Q	CP000924	PSX9Q	CP000957	
	127	90	13	PS9R	CP000925	PSX9R	CP000958	
	142	105	13	PS9S	CP000926	PSX9S	CP000959	
	162	125	13	PS9L	CP000927	PSX9L	CP000960	
	192	155	13	PS9U	CP000928	PSX9U	CP000961	
M20	202	165	13	PS9V	CP000929	PSX9V	CP000962	21000
	242	205	13	PS9Z	CP000930	PSX9Z	CP000963	
	127	86	17	PS9W	CP000931	PSX9W	CP000964	
	157	116	17	PS9X	CP000932	PSX9X	CP000965	
M24	182	141	17	PS9Y	CP000933	PSX9Y	CP000966	23000
	247	206	17	PS9J	CP000934	PSX9J	CP000967	
	137	96	19	PS9K	CP000935	PSX9K	CP000968	
M24	163	122	19	PS9α	CP000936	PSX9α	CP000969	23000
	193	152	19	PS9β	CP000937	PSX9β	CP000970	
	223	182	19	PS9γ	CP000938	PSX9γ	CP000971	
	341	300	19	PS9δ	CP000939	PSX9δ	CP000972	

Spindle measures in inches				Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
ø d	A	H	Wrench	Type	Code	Type	Code	
1/2"-13 UNC	5,20	4	7/16"	PS9ε	CP000940	PSX9ε	CP000973	15000
5/8"-11 UNC	8,32	7	1/2"	PS9η	CP000841	PSX9η	CP000974	19000
3/4"-10 UNC	8,41	7	5/8"	PS9θ	CP000942	PSX9θ	CP000975	21000


Base material: Reinforced polyamide black colour.
Box quantity: 24 pieces.

Accessories

Anti-slip pads:


- code: 7266;
- material: soft PVC 68 shore black colour;
- box quantity: 24 pieces.

Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	8,4	10,5	13	15	17	21	25
Smm	1,6	2	2,5	2,5	3	3	4
ø A mm	17	21	24	28	30	37	44
Zinc plated steel codes	7636	7283	7284	7285	7289	7290	7293
Stainless steel codes	7637	7286	7287	7288	7291	7292	7294

Nuts UNI 5588-65 - Box quantity: 24 pieces.




ø d	M8	M10	M12	M14	M16	M20	M24
Smm	6,5	8	10	11	13	16	19
Ch. mm	13	17	19	22	24	30	36
Zinc plated steel codes	7634	7269	7270	7271	7275	7276	7279
Stainless steel codes	7635	7272	7273	7274	7277	7278	7280

On request

- Bases: In reinforced polypropylene • other colours • with prebored fixing holes.
- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.

Articulated feet (base in reinforced polyamide) ø 102 Type: PS 10

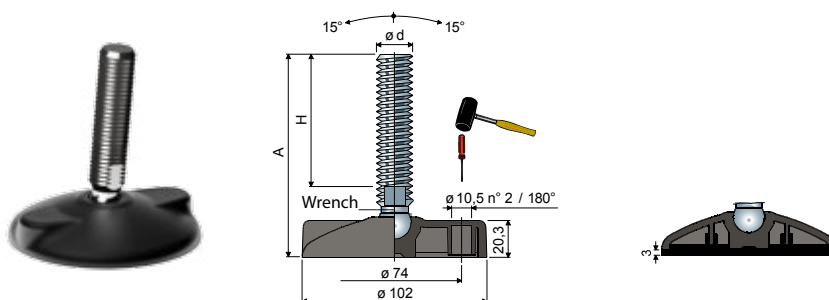

Spindle measures in mm								
ø d	A	H	Wrench	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
				Type	Code	Type	Code	
M12	79	43	10	PS10A	CP000976	PSX10A	CP001003	15000
	99	63	10	PS10B	CP000977	PSX10B	CP001004	
	114	78	10	PS10C	CP000978	PSX10C	CP001005	
	129	93	10	PS10D	CP000979	PSX10D	CP001006	
	159	123	10	PS10E	CP000980	PSX10E	CP001007	
M14	99	61	12	PS10F	CP000981	PSX10F	CP001008	18000
	129	91	12	PS10G	CP000982	PSX10G	CP001009	
	154	116	12	PS10H	CP000983	PSX10H	CP001010	
M16	100	60	13	PS10I	CP000984	PSX10I	CP001011	22000
	130	90	13	PS10L	CP000985	PSX10L	CP001012	
	145	105	13	PS10M	CP000986	PSX10M	CP001013	
	165	125	13	PS10N	CP000987	PSX10N	CP001014	
	195	155	13	PS10O	CP000988	PSX10O	CP001015	
	205	165	13	PS10P	CP000989	PSX10P	CP001016	
	245	205	13	PS10Q	CP000990	PSX10Q	CP001017	
M20	130	86	17	PS10R	CP000991	PSX10R	CP001018	24000
	160	116	17	PS10S	CP000992	PSX10S	CP001019	
	185	141	17	PS10T	CP000993	PSX10T	CP001020	
	250	206	17	PS10U	CP000994	PSX10U	CP001021	
M24	140	96	19	PS10V	CP000995	PSX10V	CP001022	26000
	166	122	19	PS10Z	CP000996	PSX10Z	CP001023	
	196	152	19	PS10W	CP000997	PSX10W	CP001024	
	226	182	19	PS10X	CP000998	PSX10X	CP001025	
	344	300	19	PS10Y	CP000999	PSX10Y	CP001026	

Spindle measures in inches								
ø d	A	H	Wrench	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
				Type	Code	Type	Code	
1/2"-13 UNC	5,44	4	7/16"	PS10J	CP001000	PSX10J	CP001027	15000
5/8"-11 UNC	8,57	7	1/2"	PS10K	CP001001	PSX10K	CP001028	22000
3/4"-10 UNC	8,65	7	5/8"	PS10α	CP001002	PSX10α	CP001029	24000

Base material: Reinforced polyamide black colour.


Box quantity: 24 pieces.

Accessories

Anti-slip pads:


- code: 7267;
- material: soft PVC 68 shore black colour;
- box quantity: 24 pieces.

Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	13	15	17	21	25
S mm	2,5	2,5	3	3	4
ø A mm	24	28	30	37	44
Zinc plated steel codes	7284	7285	7289	7290	7293
Stainless steel codes	7287	7288	7291	7292	7294

Nuts UNI 5588-65 - Box quantity: 24 pieces.




ø d	M12	M14	M16	M20	M24
S mm	10	11	13	16	19
Ch. mm	19	22	24	30	36
Zinc plated steel codes	7270	7271	7275	7276	7279
Stainless steel codes	7273	7274	7277	7278	7280

On request

- Bases: In reinforced polypropylene • other colours • with prebored fixing holes.
- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.

Articulated feet (base in reinforced polyamide) ø 124 Type: PS 11

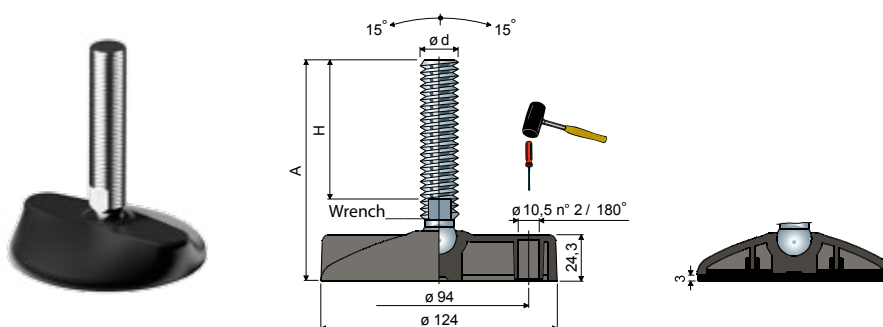

Spindle measures in mm

ød	A	H	Wrench	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
				Type	Code	Type	Code	
M14	103	61	12	PS11A	CP001030	PSX11A	CP001051	18000
	133	91	12	PS11B	CP001031	PSX11B	CP001052	
	158	116	12	PS11C	CP001032	PSX11C	CP001053	
M16	104	60	13	PS11D	CP001033	PSX11D	CP001054	25000
	134	90	13	PS11E	CP001034	PSX11E	CP001055	
	149	105	13	PS11F	CP001035	PSX11F	CP001056	
	169	125	13	PS11G	CP001036	PSX11G	CP001057	
	199	155	13	PS11H	CP001037	PSX11H	CP001058	
	209	165	13	PS11I	CP001038	PSX11I	CP001059	
	249	205	13	PS11L	CP001039	PSX11L	CP001060	
M20	134	86	17	PS11M	CP001040	PSX11M	CP001061	27000
	164	116	17	PS11N	CP001041	PSX11N	CP001062	
	189	141	17	PS11O	CP001042	PSX11O	CP001063	
	254	206	17	PS11P	CP001043	PSX11P	CP001064	
M24	144	96	19	PS11Q	CP001044	PSX11Q	CP001065	29000
	170	122	19	PS11R	CP001045	PSX11R	CP001066	
	200	152	19	PS11S	CP001046	PSX11S	CP001067	
	230	182	19	PS11T	CP001047	PSX11T	CP001068	
	348	300	19	PS11U	CP001048	PSX11U	CP001069	

Spindle measures in inches

ød	A	H	Wrench	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
				Type	Code	Type	Code	
5/8"-11 UNC	8,75	7	1/2"	PS11V	CP001049	PSX11V	CP001070	25000
3/4"-10 UNC	8,82	7	5/8"	PS11Z	CP001050	PSX11Z	CP001071	27000

Base material: Reinforced polyamide black colour.

Box quantity: 8 pieces.

Accessories


Anti-slip pads:

- code: 7268;

- material: soft PVC 68 shore black colour;


- box quantity: 8 pieces.

Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	17	21	25	31
Smm	3	3	4	4
ø A mm	30	37	44	56
Zinc plated steel codes	7289	7290	7293	7295
Stainless steel codes	7291	7292	7294	7296

Nuts UNI 5588-65 - Box quantity: 24 pieces.




ø d	M16	M20	M24	M30
Smm	13	16	19	24
Ch. mm	24	30	36	46
Zinc plated steel codes	7275	7276	7279	7281
Stainless steel codes	7277	7278	7280	7282

On request

- Bases: In reinforced polypropylene • other colours • with prebored fixing holes.
- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.

Articulated feet (base in reinforced polyamide) ø 124 Type: PS 12 e PSX 12

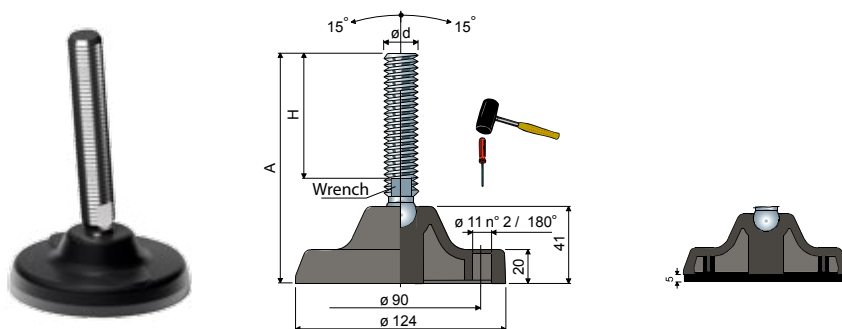

Spindle measures in mm				Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
ø d	A	H	Wrench	Type	Code	Type	Code	
M16	120	60	13	PS12A	CP001072	PSX12A	CP001090	25000
	150	90	13	PS12B	CP001073	PSX12B	CP001091	
	165	105	13	PS12C	CP001074	PSX12C	CP001092	
	185	125	13	PS12D	CP001075	PSX12D	CP001093	
	215	155	13	PS12E	CP001076	PSX12E	CP001094	
	225	165	13	PS12F	CP001077	PSX12F	CP001095	
M20	265	205	13	PS12G	CP001078	PSX12G	CP001096	27000
	149	86	17	PS12H	CP001079	PSX12H	CP001097	
	179	116	17	PS12I	CP001080	PSX12I	CP001098	
	204	141	17	PS12L	CP001081	PSX12L	CP001099	
	269	206	17	PS12M	CP001082	PSX12M	CP001100	
M24	159	96	19	PS12N	CP001083	PSX12N	CP001101	29000
	185	122	19	PS12O	CP001084	PSX12O	CP001102	
	215	152	19	PS12P	CP001085	PSX12P	CP001103	
	245	182	19	PS12Q	CP001086	PSX12Q	CP001104	
	363	300	19	PS12R	CP001087	PSX12R	CP001105	

Spindle measures in inches				Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
ø d	A	H	Wrench	Type	Code	Type	Code	
5/8"-11 UNC	9,29	7	1/2"	PS12S	CP001088	PSX12S	CP001106	25000
3/4"-10 UNC	9,37	7	5/8"	PS12T	CP001089	PSX12T	CP001107	27000

Base material: Reinforced polyamide black colour.

Box quantity: 8 pieces.


Accessories

Anti-slip pads:


- code: 7633;

- material: soft PVC 68 shore black colour;

- box quantity: 8 pieces.




Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	17	21	25
Smm	3	3	4
ø A mm	30	37	44
Zinc plated steel codes	7289	7290	7293
Stainless steel codes	7291	7292	7294

Nuts UNI 5588-65 - Box quantity: 24 pieces.



ø d	M16	M20	M24
Smm	13	16	19
Ch. mm	24	30	36
Zinc plated steel codes	7275	7276	7279
Stainless steel codes	7277	7278	7280

Spacers:

- code: 83410 (see pag. 210);



- material: Reinforced polyamide black colour;

- box quantity: 8 pieces.

On request

- Bases: In reinforced polypropylene • other colours • with prebored fixing holes.
- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.

Adjustable Feet (base in reinforced polyamide) ø 50 Type: PO 1 e POX 1



Accessories

Anti-slip pads:

- code: 7264;
- material: soft PVC 68 shore black colour;
- box quantity: 24 pieces.

ø d	A (mm)	H (mm)	Wrench (mm)	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
				Type	Code	Type	Code	
M10	60	40	17	PO1A	CP001108	POX1A	CP001112	12000
	65	45	17	PO1B	CP001109	POX1B	CP001113	
	90	70	17	PO1C	CP001110	POX1C	CP001114	
	120	100	17	PO1D	CP001111	POX1D	CP001115	


Base material: Reinforced polyamide black colour.

Box quantity: 24 pieces.

On request


- Bases: In reinforced polypropylene • other colours.
- Spindles with: Threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.

Washers UNI 6592-69 - Box quantity: 24 pieces.




ø d mm	10,5
S mm	2
ø A mm	21
Zinc plated steel codes	7283
Stainless steel codes	7286

Nuts UNI 5588-65 - Box quantity: 24 pieces.



ø d	M10
S mm	8
Ch. mm	17
Zinc plated steel codes	7269
Stainless steel codes	7272

Articulated feet (base in reinforced polyamide) ø 102 Type: PO 2 e POX 2

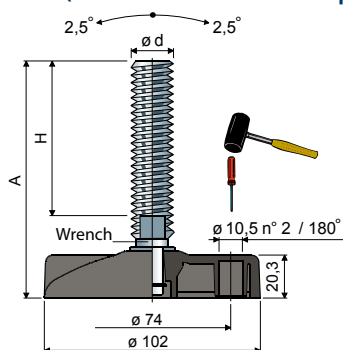

Accessories

Anti-slip pads:


- code: 7267;
- material: soft PVC 68 shore black colour;
- box quantity: 24 pieces.

ø d	A (mm)	H (mm)	Wrench (mm)	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
				Type	Code	Type	Code	
M16	98	58	13	PO2A	CP001116	POX2A	CP001130	33000
	159	119	13	PO2B	CP001117	POX2B	CP001131	
	185	145	13	PO2C	CP001118	POX2C	CP001132	
	241	201	13	PO2D	CP001119	POX2D	CP001133	
M18	197	157	15	PO2E	CP001120	POX2E	CP001134	35000
	150	107	17	PO2F	CP001121	POX2F	CP001135	
M20	178	135	17	PO2G	CP001122	POX2G	CP001136	
	200	157	17	PO2H	CP001123	POX2H	CP001137	
	233	190	17	PO2I	CP001124	POX2I	CP001138	
	281	238	17	PO2L	CP001125	POX2L	CP001139	
M24	136	90	19	PO2M	CP001126	POX2M	CP001140	37000
	173	127	19	PO2N	CP001127	POX2N	CP001141	
	208	162	19	PO2O	CP001128	POX2O	CP001142	
	248	202	19	PO2P	CP001129	POX2P	CP001143	

Base material: Reinforced polyamide black colour.


Box quantity: 24 pieces.

Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	17	21	25
S mm	3	3	4
ø A mm	30	37	44
Zinc plated steel codes	7289	7290	7293
Stainless steel codes	7291	7292	7294

Nuts UNI 5588-65 - Box quantity: 24 pieces.




ø d	M16	M20	M24
S mm	13	16	19
Ch. mm	24	30	36
Zinc plated steel codes	7275	7276	7279
Stainless steel codes	7277	7278	7280

On request

- Bases: In reinforced polypropylene • other colours • with prebored fixing holes.
- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.

Articulated feet (base in reinforced polyamide) ø 124 Type: PO 3 e POX 3

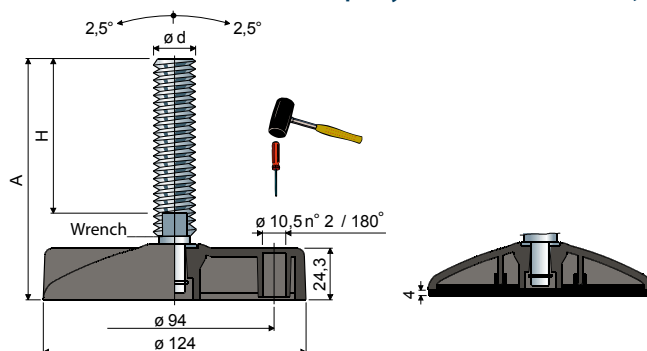


Accessories
Anti-slip pads:
- code: 7268;
- material: soft PVC 68 shore black colour;
- box quantity: 8 pieces.

ød	A	H	Wrench	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load
	(mm)	(mm)	(mm)	Type	Code	Type	Code	(N)
M16	100	58	13	PO3A	CP001144	POX3A	CP001160	43000
	161	119	13	PO3B	CP001145	POX3B	CP001161	
	187	145	13	PO3C	CP001146	POX3C	CP001162	
	243	201	13	PO3D	CP001147	POX3D	CP001163	
M18	199	157	15	PO3E	CP001148	POX3E	CP001164	45000
	152	107	17	PO3F	CP001149	POX3F	CP001165	
	180	135	17	PO3G	CP001150	POX3G	CP001166	
M20	202	157	17	PO3H	CP001151	POX3H	CP001167	47000
	235	190	17	PO3I	CP001152	POX3I	CP001168	
	283	238	17	PO3L	CP001153	POX3L	CP001169	
	138	90	19	PO3M	CP001154	POX3M	CP001170	
M24	175	127	19	PO3N	CP001155	POX3N	CP001171	50000
	210	162	19	PO3O	CP001156	POX3O	CP001172	
	250	202	19	PO3P	CP001157	POX3P	CP001173	
M30	173	125	24	PO3Q	CP001158	POX3P	CP001174	50000
	233	185	24	PO3R	CP001159	POX3P	CP001175	

Base material: Reinforced polyamide black colour.


Box quantity: 8 pieces.

Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	17	21	25	31
S mm	3	3	4	4
ø A mm	30	37	44	56
Zinc plated steel codes	7289	7290	7293	7295
Stainless steel codes	7291	7292	7294	7296

Nuts UNI 5588-65 - Box quantity: 24 pieces.






ø d	M16	M20	M24	M30
S mm	13	16	19	24
Ch. mm	24	30	36	46
Zinc plated steel codes	7275	7276	7279	7281
Stainless steel codes	7277	7278	7280	7282



On request

- Bases: In reinforced polypropylene • other colours • with prebored fixing holes.
- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.

Spacer (for PS 12, PO 4) Type: DT 1



Type	Code
DT1	CP001176



Example of application

MATERIALS: Spacer in reinforced polyamide black colour.

FEATURES: To be used with footplates part. 92 and 93 to increase the height of the footplates.


It is possible to assemble the anti-slip code 7633.

BOX QUANTITY: 8 pieces.

ON REQUEST:

- Box Quantity: According to your request.

Articulated feet (base in reinforced polyamide) ø 124 Type: PO 4 e POX 4

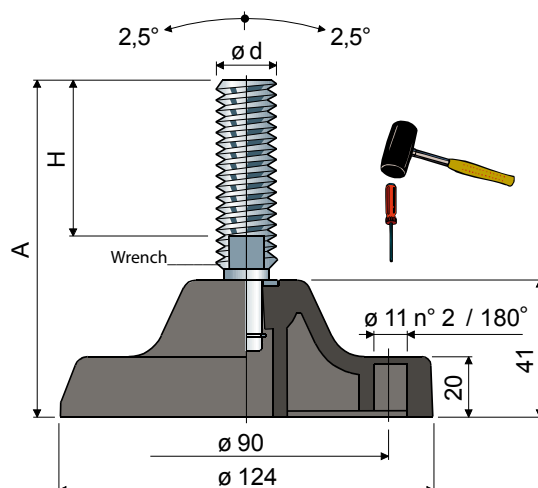

ø d	A	H	Wrench	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
	(mm)	(mm)	(mm)	Type	Code	Type	Code	
M16	115	58	13	PO4A	CP001177	POX4A	CP001193	43000
	176	119	13	PO4B	CP001178	POX4B	CP001194	
	202	145	13	PO4C	CP001179	POX4C	CP001195	
	258	201	13	PO4D	CP001180	POX4D	CP001196	
M18	214	157	15	PO4E	CP001181	POX4E	CP001197	
	167	107	17	PO4F	CP001182	POX4F	CP001198	
	195	135	17	PO4G	CP001183	POX4G	CP001199	
M20	217	157	17	PO4H	CP001184	POX4H	CP001200	45000
	250	190	17	PO4I	CP001185	POX4I	CP001201	
	298	238	17	PO4L	CP001186	POX4L	CP001202	
	153	90	19	PO4M	CP001187	POX4M	CP001203	
M24	190	127	19	PO4N	CP001188	POX4N	CP001204	47000
	225	162	19	PO4O	CP001189	POX4O	CP001205	
	265	202	19	PO4P	CP001190	POX4P	CP001206	
	188	125	24	PO4Q	CP001191	POX4Q	CP001207	
M30	248	185	24	PO4R	CP001192	POX4R	CP001208	50000

Base material: Reinforced polyamide black colour.

Box quantity: 8 pieces.

Accessories

Anti-slip pads:


- code: 7633;

- material: soft PVC 68 shore black colour;

- box quantity: 8 pieces.




Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	17	21	25	31
S mm	3	3	4	4
ø A mm	30	37	44	56
Zinc plated steel codes	7289	7290	7293	7295
Stainless steel codes	7291	7292	7294	7296

Nuts UNI 5588-65 - Box quantity: 24 pieces.




ø d	M16	M20	M24	M30
S mm	13	16	19	24
Ch. mm	24	30	36	46
Zinc plated steel codes	7275	7276	7279	7281
Stainless steel codes	7277	7278	7280	7282

Spacers:

- code: 83410 (see pag. 210);

- material: Reinforced polyamide black colour;


- box quantity: 8 pieces.



On request

- Bases: In reinforced polypropylene • other colours • with prebored fixing holes.
- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.

Adjustable feet (base in steel) ø 80 Type: PO5

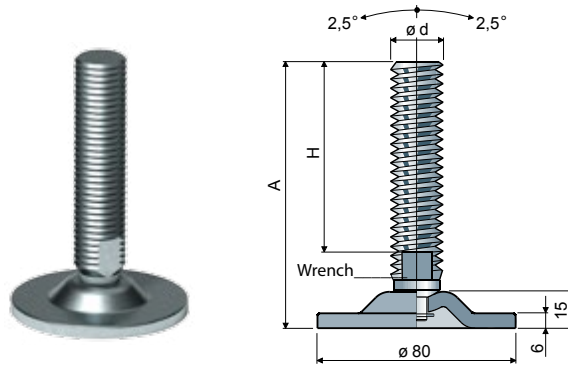

ød	A	H	Wrench	Spindle in zinc plated steel		Max static load (N)
	(mm)	(mm)	(mm)	Type	Code	
M20	120	87	17	PO5A	CP001209	40000
M24	120	85	19	PO5A	CP001210	

Material: Base and spindle in zinc-plated steel.
Box quantity: 8 pieces.

Washers UNI 6592-69 - Box quantity: 24 pieces.

ø d mm	21	25
S mm	3	4
ø A mm	37	44
Zinc plated steel codes	7290	7293


Nuts UNI 5588-65 - Box quantity: 24 pieces.

ø d	M20	M24
S mm	16	19
Ch. mm	30	36
Zinc plated steel codes	7276	7279

On request

- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.

Adjustable feet (base in steel) ø 113 Type: PO 6 e POX 6

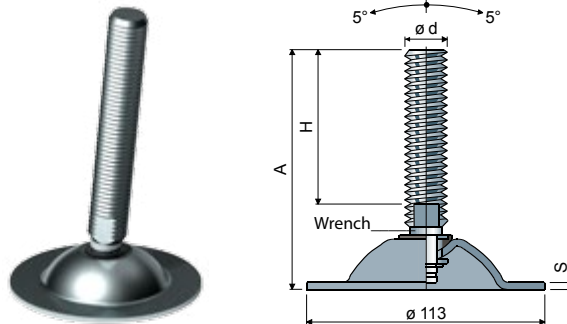

ød	A	H	Wrench	Spindle, base in zinc plated steel		Spindle, base in stainless steel AISI 304		Max static load (N)
	(mm)	(mm)	(mm)	Type	Code	Type	Code	
M16	100	58	13	PO6A	CP001211	POX6A	CP001227	15000 (zinc plated) S = 3,5
	161	119	13	PO6B	CP001212	POX6B	CP001228	
	187	145	13	PO6C	CP001213	POX6C	CP001229	
	243	201	13	PO6D	CP001214	POX6D	CP001230	
M18	199	157	15	PO6E	CP001215	POX6E	CP001231	
	152	107	17	PO6F	CP001216	POX6F	CP001232	
	180	135	17	PO6G	CP001217	POX6G	CP001233	
M20	202	157	17	PO6H	CP001218	POX6H	CP001234	10000 (AISI 304) S = 3
	235	190	17	PO6I	CP001219	POX6I	CP001235	
	283	238	17	PO6L	CP001220	POX6L	CP001236	
	138	90	19	PO6M	CP001221	POX6M	CP001237	
M24	175	127	19	PO6N	CP001222	POX6N	CP001238	
	210	162	19	PO6O	CP001223	POX6O	CP001239	
	250	202	19	PO6P	CP001224	POX6P	CP001240	
M30	173	125	24	PO6Q	CP001225	POX6Q	CP001241	
	233	185	24	PO6R	CP001226	POX6R	CP001242	

Washers UNI 6592-69 - Box quantity: 24 pieces.

ø d mm	17	21	25	31
S mm	3	3	4	4
ø A mm	30	37	44	56
Zinc plated steel codes	7289	7290	7293	7295
Stainless steel codes	7291	7292	7294	7296


Nuts UNI 5588-65 - Box quantity: 24 pieces.

ø d	M16	M20	M24	M30
S mm	13	16	19	24
Ch. mm	24	30	36	46
Zinc plated steel codes	7275	7276	7279	7281
Stainless steel codes	7277	7278	7280	7282


Box quantity: 8 pieces.

On request

- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.

Adjustable feet (base in steel) $\varnothing 113$ Type: PO 7 e POX 7

$\varnothing d$	A	H	Wrench	Spindle, base in zinc plated steel		Spindle, base in stainless steel AISI 304		Max static load
	(mm)	(mm)	(mm)	Type	Code	Type	Code	(N)
M16	100	58	13	PO7A	CP001243	POX7A	CP001259	15000 (zinc plated) S = 3,5
	161	119	13	PO7B	CP001244	POX7B	CP001260	
	187	145	13	PO7C	CP001245	POX7C	CP001261	
	243	201	13	PO7D	CP001246	POX7D	CP001262	
M18	199	157	15	PO7E	CP001247	POX7E	CP001263	
	152	107	17	PO7F	CP001248	POX7F	CP001264	
	180	135	17	PO7G	CP001249	POX7G	CP001265	
	202	157	17	PO7H	CP001250	POX7H	CP001266	
M20	235	190	17	PO7I	CP001251	POX7I	CP001267	10000 (AISI 304) S = 3
	283	238	17	PO7L	CP001252	POX7L	CP001268	
	138	90	19	PO7M	CP001253	POX7M	CP001269	
	175	127	19	PO7N	CP001254	POX7N	CP001270	
M24	210	162	19	PO7O	CP001255	POX7O	CP001271	
	250	202	19	PO7P	CP001256	POX7P	CP001272	
	173	125	24	PO7Q	CP001257	POX7Q	CP001273	
M30	233	185	24	PO7R	CP001258	POX7R	CP001274	

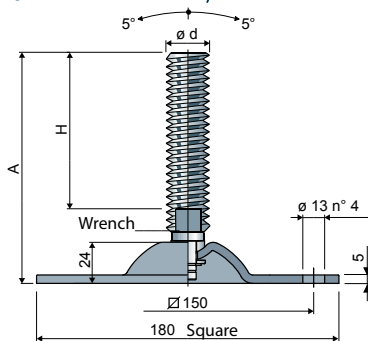
Adjustable feet (base in zinc plated steel) $\square 180$ Type: PO 8

$\varnothing d$	A	H	Wrench	Spindle and base in zinc plated steel		Max static load
	(mm)	(mm)	(mm)	Type	Code	(N)
M16	100	57	13	PO8A	CP001275	45000
	161	118	13	PO8B	CP001276	
	187	144	13	PO8C	CP001277	
	243	200	13	PO8D	CP001278	
M18	199	157	15	PO8E	CP001279	46000
	152	107	17	PO8F	CP001280	
	181	136	17	PO8G	CP001281	
	202	157	17	PO8H	CP001282	
M20	235	190	17	PO8I	CP001283	47000
	283	238	17	PO8L	CP001284	
	138	90	19	PO8M	CP001285	
	175	127	19	PO8N	CP001286	
M24	210	162	19	PO8O	CP001287	48000
	250	202	19	PO8P	CP001288	
	173	125	24	PO8Q	CP001289	
M30	233	185	24	PO8R	CP001290	49000

On request

- Spindles with: Sunk hexagon head
- second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.


Washers UNI 6592-69 - Box quantity: 24 pieces.



$\varnothing d$ mm	17	21	25	31
Smm	3	3	4	4
$\varnothing A$ mm	30	37	44	56
Zinc plated steel codes	7289	7290	7293	7295
Stainless steel codes	7291	7292	7294	7296


Box quantity: 8 pieces.

Nuts UNI 5588-65 - Box quantity: 24 pieces.




$\varnothing d$	M16	M20	M24	M30
Smm	13	16	19	24
Ch. mm	24	30	36	46
Zinc plated steel codes	7275	7276	7279	7281
Stainless steel codes	7277	7278	7280	7282

Adjustable feet (base in nickel plated steel) ø 80 Type: PO 9 e POX 9

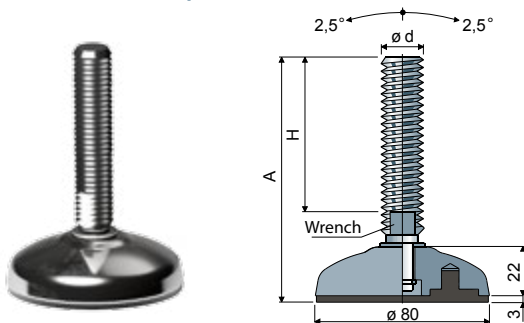

ød	A (mm)	H (mm)	Wrench (mm)	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
				Type	Code	Type	Code	
M16	101	58	13	PO9A	CP001291	POX9A	CP001305	46000
	162	119	13	PO9B	CP001292	POX9B	CP001306	
	188	145	13	PO9C	CP001293	POX9C	CP001307	
	244	201	13	PO9D	CP001294	POX9D	CP001308	
M18	200	157	15	PO9E	CP001295	POX9E	CP001309	47000
	153	107	17	PO9F	CP001296	POX9F	CP001310	
	181	135	17	PO9G	CP001297	POX9G	CP001311	
M20	203	157	17	PO9H	CP001298	POX9H	CP001312	47000
	236	190	17	PO9I	CP001299	POX9I	CP001313	
	284	238	17	PO9L	CP001300	POX9L	CP001314	
	139	90	19	PO9M	CP001301	POX9M	CP001315	
M24	176	127	19	PO9N	CP001302	POX9N	CP001316	48000
	211	162	19	PO9O	CP000303	POX9O	CP001317	
	250	202	19	PO9P	CP001304	POX9P	CP001318	

Adjustable feet (base in nickel plated steel) ø 102 Type: PO 10 e POX 10

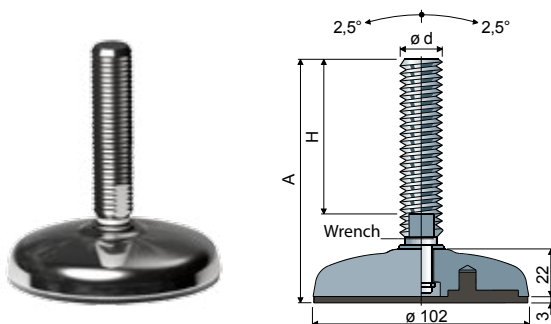

ød	A (mm)	H (mm)	Wrench (mm)	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
				Type	Code	Type	Code	
M16	101	58	13	PO10A	CP001319	POX10A	CP001333	50000
	162	119	13	PO10B	CP001320	POX10B	CP001334	
	188	145	13	PO10C	CP001321	POX10C	CP001335	
	244	201	13	PO10D	CP001322	POX10D	CP001336	
M18	200	157	15	PO10E	CP001323	POX10E	CP001337	51000
	153	107	17	PO10F	CP001324	POX10F	CP001338	
	181	135	17	PO10G	CP001325	POX10G	CP001339	
M20	203	157	17	PO10H	CP001326	POX10H	CP001340	52000
	236	190	17	PO10I	CP001327	POX10I	CP001341	
	284	238	17	PO10L	CP001328	POX10L	CP001342	
	139	90	19	PO10M	CP001329	POX10M	CP001343	
M24	176	127	19	PO10N	CP001330	POX10n	CP001344	52000
	211	162	19	PO10O	CP000331	POX10O	CP001345	
	250	202	19	PO10P	CP001332	POX10P	CP001346	

Base material: Nickel plated steel.


Box quantity: 8 pieces.

Features: The feet are complete with anti-slip pad made out of soft PVC 68 shore black colour .

On request


- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat
- threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.

Washers UNI 6592-69 - Box quantity: 24 pieces.




ø d mm	17	21	25
Smm	3	3	4
ø A mm	30	37	44
Zinc plated steel codes	7289	7290	7293
Stainless steel codes	7291	7292	7294

Nuts UNI 5588-65 - Box quantity: 24 pieces.




ø d	M16	M20	M24
Smm	13	16	19
Ch. mm	24	30	36
Zinc plated steel codes	7275	7276	7279
Stainless steel codes	7277	7278	7280

Adjustable feet (base in nickel plated steel) ø 124 Type: PO 11 e POX 11




Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	17	21	25	31
Smm	3	3	4	4
ø A mm	30	37	44	56
Zinc plated steel codes	7289	7290	7293	7295
Stainless steel codes	7291	7292	7294	7296

Nuts UNI 5588-65 - Box quantity: 24 pieces.



ø d	M16	M20	M24	M30
Smm	13	16	19	24
Ch. mm	24	30	36	46
Zinc plated steel codes	7275	7276	7279	7281
Stainless steel codes	7277	7278	7280	7282

ø d	A H			Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
	(mm)	(mm)	(mm)	Type	Code	Type	Code	
M16	104	58	13	PO11A	CP001347	POX11A	CP001363	55000
	165	119	13	PO11A	CP001348	POX11A	CP001364	
	191	145	13	PO11A	CP001349	POX11A	CP001365	
	247	201	13	PO11A	CP001350	POX11A	CP001366	
M18	203	157	15	PO11A	CP001351	POX11A	CP001367	56000
	156	107	17	PO11A	CP001352	POX11A	CP001368	
	184	135	17	PO11A	CP001353	POX11A	CP001369	
	206	157	17	PO11A	CP001354	POX11A	CP001370	
M20	239	190	17	PO11A	CP001355	POX11A	CP001371	57000
	287	238	17	PO11A	CP001356	POX11A	CP001372	
	142	90	19	PO11A	CP001357	POX11A	CP001373	
	179	127	19	PO11A	CP001358	POX11A	CP001374	
M24	214	162	19	PO11A	CP001359	POX11A	CP001375	58000
	254	202	19	PO11A	CP001360	POX11A	CP001376	
	177	125	24	PO11A	CP001361	POX11A	CP001377	
	237	185	24	PO11A	CP001362	POX11A	CP001378	

Base material: Nickel plated steel.


Box quantity: 8 pieces.

Features: The feet are complete with anti-slip pad made out of soft PVC 68 shore black colour .


On request

- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.

Articulated feet (base in stainless steel) ø 75 Type: PO 12

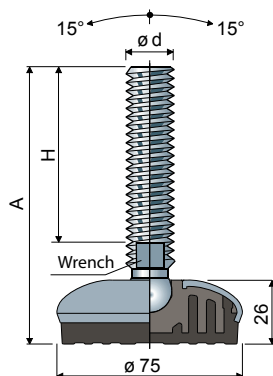


Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	17	21	25
Smm	3	3	4
ø A mm	30	37	44
Stainless steel codes	7291	7292	7294

Nuts UNI 5588-65 - Box quantity: 24 pieces.



ø d	M16	M20	M24
Smm	13	16	19
Ch. mm	24	30	36
Stainless steel codes	7277	7278	7280

Spindle measures in mm and inches						
ø d	A	H	Wrench	Spindle in stainless steel AISI 304		Max static load (N)
				Type	Code	
M16	103	60	13	PO12A	CP001379	19000
	133	90	13	PO12B	CP001380	
	148	105	13	PO12C	CP001381	
	168	125	13	PO12D	CP001382	
	198	155	13	PO12E	CP001383	
	208	165	13	PO12F	CP001384	
	248	205	13	PO12G	CP001385	
M20	132	86	17	PO12H	CP001386	21000
	162	116	17	PO12I	CP001387	
	187	141	17	PO12L	CP001388	
	252	206	17	PO12M	CP001389	
	142	96	19	PO12N	CP001390	
M24	168	122	19	PO12O	CP001391	23000
	198	152	19	PO12P	CP001392	
	228	182	19	PO12Q	CP001393	
	346	300	19	PO12R	CP001394	
5/8"-11 UNC	8.70	7	1/2"	PO12S	CP001395	19000
3/4"-10 UNC	8.78	7	5/8"	PO12T	CP001396	21000

Material: Internal part made of reinforced polyamide; external covering made of stainless steel AISI 304; anti-slip pad made of soft PVC 68 shore black colour.


Box quantity: 8 pieces.

Features: Comoulded anti-slip pad allows a perfect adherence with steel base. Consequent absence of internal cavities makes foot extremely cleanable.

On request

- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.

Adjustable feet (base in stainless steel) ø75 Type: PO 13

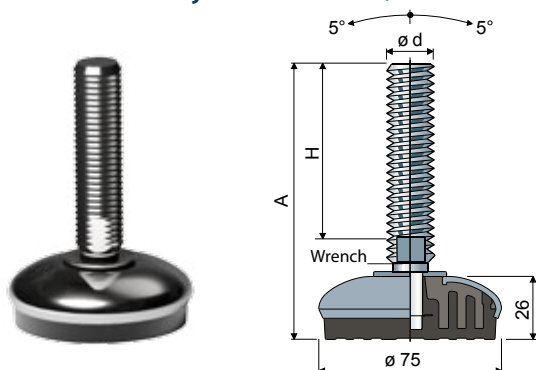

Washers UNI 6592-69 - Box quantity: 24 pieces.

ø d mm	13	15	17	21	25	31
Smm	2,5	2,5	3	3	4	4
ø A mm	24	28	30	37	44	56
Stainless steel codes	7287	7288	7291	7292	7294	7296

Nuts UNI 5588-65 - Box quantity: 24 pieces.

ø d	M12	M14	M16	M20	M24	M30
Smm	10	11	13	16	19	24
Ch. mm	19	22	24	30	36	46
Stainless steel codes	7273	7274	7277	7278	7280	7282

ø d	A	H	Wrench	Spindle and base in stainless steel AISI 304		Max static load
	(mm)	(mm)	(mm)	Type	Code	(N)
M12	109	70	10	PO13A	CP001397	17000
M14	148	108	12	PO13B	CP001398	
M16	102	58	13	PO13C	CP001399	
	163	119	13	PO13D	CP001400	
	189	145	13	PO13E	CP001401	24000
	245	201	13	PO13F	CP001402	
M18	201	157	15	PO13G	CP001403	
	153	107	17	PO13H	CP001404	
M20	181	135	17	PO13I	CP001405	
	203	157	17	PO13L	CP001406	
	236	190	17	PO13M	CP001407	
	284	238	17	PO13N	CP001408	
M24	139	90	19	PO13O	CP001409	24000
	176	127	19	PO13P	CP001410	
	211	162	19	PO13Q	CP001411	
	250	201	19	PO13R	CP001412	
M30	174	125	24	PO13S	CP001413	24000
	234	185	24	PO13T	CP001414	

Material: Internal part made of reinforced polyamide; external covering made of stainless steel AISI 304; anti-slip pad made of soft PVC 68 shore black colour.


Box quantity: 8 pieces.

Features: Comoulded anti-slip pad allows a perfect adherence with steel base. Consequent absence of internal cavities makes foot extremely cleanable.

On request

- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.

Articulated feet (base in stainless steel) ø 95 Type: PO 14

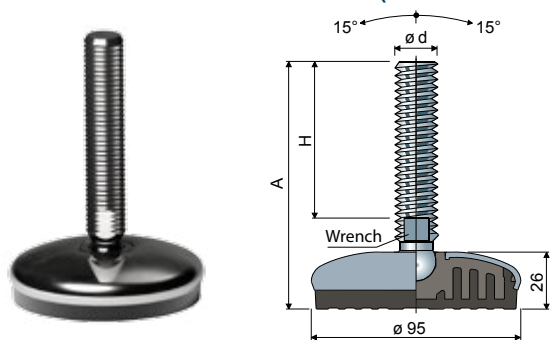

Washers UNI 6592-69 - Box quantity: 24 pieces.

ø d mm	17	21	25
Smm	3	3	4
ø A mm	30	37	44
Stainless steel codes	7291	7292	7294

Nuts UNI 5588-65 - Box quantity: 24 pieces.

ø d	M16	M20	M24
Smm	13	16	19
Ch. mm	24	30	36
Stainless steel codes	7277	7278	7280

Spindle measures in mm and inches

ø d	A	H	Wrench	Spindle and base in stainless steel AISI 304		Max static load
				Type	Code	(N)
M16	103	60	13	PO14A	CP001415	22000
	133	90	13	PO14B	CP001416	
	148	105	13	PO14C	CP001417	
	168	125	13	PO14D	CP001418	
	198	155	13	PO14E	CP001419	
	208	165	13	PO14F	CP001420	
	248	205	13	PO14G	CP001421	
M20	132	86	17	PO14H	CP001422	24000
	162	116	17	PO14I	CP001423	
	187	141	17	PO14L	CP001424	
	252	206	17	PO14M	CP001425	
M24	142	96	19	PO14N	CP001422	26000
	168	122	19	PO14O	CP001427	
	198	152	19	PO14P	CP001428	
	228	182	19	PO14Q	CP001429	
	346	300	19	PO14R	CP001430	
5/8"-11 UNC	8,70	7	1/2"	PO14S	CP001431	18000
3/4"-10 UNC	8,78	7	5/2"	PO14T	CP001432	22000

Material: Internal part made of reinforced polyamide; external covering made of stainless steel AISI 304; anti-slip pad made of soft PVC 68 shore black colour.


Box quantity: 8 pieces.

Features: Comoulded anti-slip pad allows a perfect adherence with steel base. Consequent absence of internal cavities makes foot extremely cleanable.

On request

- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.

Adjustable feet (base in stainless steel) ø 95 Type: PO 15

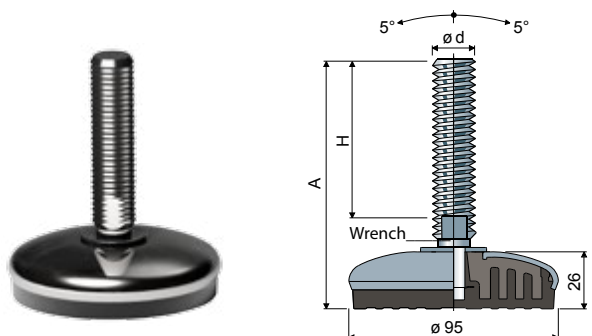

Washers UNI 6592-69 - Box quantity: 24 pieces.

ø d mm	13	15	17	21	25	31
Smm	2,5	2,5	3	3	4	4
ø A mm	24	28	30	37	44	56
Stainless steel codes	7287	7288	7291	7292	7294	7296

Nuts UNI 5588-65 - Box quantity: 24 pieces.

ø d	M12	M14	M16	M20	M24	M30
Smm	10	11	13	16	19	24
Ch. mm	19	22	24	30	36	46
Stainless steel codes	7273	7274	7277	7278	7280	7282

ø d	A (mm)	H (mm)	Wrench (mm)	Spindle and base in stainless steel AISI 304		Max static load (N)
				Type	Code	
M12	109	70	10	PO15A	CP001433	17000
M14	148	108	12	PO15B	CP001434	
	102	58	13	PO15C	CP001435	
M16	163	119	13	PO15D	CP001436	
	189	145	13	PO15E	CP001437	
	245	201	13	PO15F	CP001438	
M18	201	157	15	PO15G	CP001439	
	153	107	17	PO15H	CP001440	
	181	135	17	PO15I	CP001441	
M20	203	157	17	PO15L	CP001442	27000
	236	190	17	PO15M	CP001443	
	284	238	17	PO15N	CP001444	
	139	90	19	PO15O	CP001445	
M24	176	127	19	PO15P	CP001446	
	211	162	19	PO15Q	CP001447	
	250	201	19	PO15R	CP001448	
M30	174	125	24	PO15S	CP001449	
	234	185	24	PO13T	CP001450	

Material: Internal part made of reinforced polyamide; external covering made of stainless steel AISI 304; anti-slip pad made of soft PVC 68 shore black colour.


Box quantity: 8 pieces.

Features: Comoulded anti-slip pad allows a perfect adherence with steel base. Consequent absence of internal cavities makes foot extremely cleanable.

On request

- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.

Articulated feet (base in stainless steel) ø 120 Type: PO 16

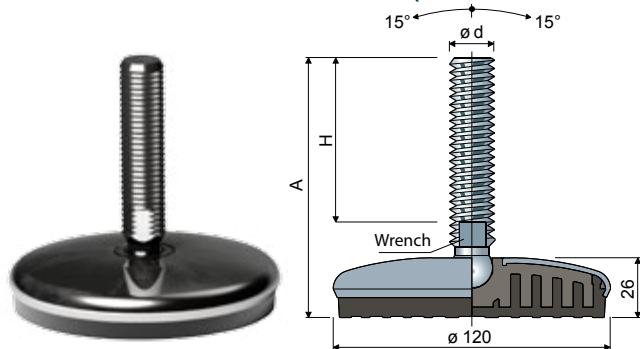

Washers UNI 6592-69 - Box quantity: 24 pieces.

ø d mm	17	21	25
Smm	3	3	4
ø A mm	30	37	44
Stainless steel codes	7291	7292	7294

Nuts UNI 5588-65 - Box quantity: 24 pieces.

ø d	M16	M20	M24
Smm	13	16	19
Ch. mm	24	30	36
Stainless steel codes	7277	7278	7280

Spindle measures in mm and inches						
ø d	A	H	Wrench	Spindle and base in stainless steel AISI 304		Max static load (N)
				Type	Code	
	103	60	13	PO16A	CP001451	
	133	90	13	PO16B	CP001452	
M16	148	105	13	PO16C	CP001453	
	168	125	13	PO16D	CP001454	25000
	198	155	13	PO16E	CP001455	
	208	165	13	PO16F	CP001456	
	248	205	13	PO16G	CP001457	
	132	86	17	PO16H	CP001458	
M20	162	116	17	PO16I	CP001459	
	187	141	17	PO16L	CP001460	27000
	252	206	17	PO16M	CP001461	
	142	96	19	PO15N	CP001462	
M24	168	122	19	PO16O	CP001463	
	198	152	19	PO16P	CP001464	29000
	228	182	19	PO16Q	CP001465	
	346	300	19	PO16R	CP001466	
5/8"-11 UNC	8,70	7	1/2"	PO16S	CP001467	25000
3/4"-10 UNC	8,78	7	5/8"	PO16T	CP001468	27000

Material: Internal part made of reinforced polyamide; external covering made of stainless steel AISI 304; anti-slip pad made of soft PVC 68 shore black colour.


Box quantity: 8 pieces.

Features: Comoulded anti-slip pad allows a perfect adherence with steel base. Consequent absence of internal cavities makes foot extremely cleanable.


On request

- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.

Adjustable feet (base in stainless steel) ø 120 Type: PO 17

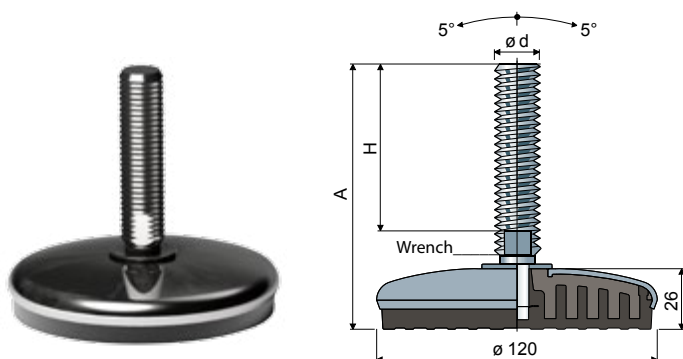


Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	13	15	17	21	25	31
Smm	2,5	2,5	3	3	4	4
ø A mm	24	28	30	37	44	56
Stainless steel codes	7287	7288	7291	7292	7294	7296

Nuts UNI 5588-65 - Box quantity: 24 pieces.



ø d	M12	M14	M16	M20	M24	M30
Smm	10	11	13	16	19	24
Ch. mm	19	22	24	30	36	46
Stainless steel codes	7273	7274	7277	7278	7280	7282

ød	A (mm)	H (mm)	Wrench (mm)	Spindle and base in stainless steel AISI 304		Max static load (N)
				Type	Code	
M12	109	70	10	PO17A	CP001469	17000
M14	148	108	12	PO17B	CP001470	
M16	102	58	13	PO17C	CP001471	
	163	119	13	PO17D	CP001472	
	189	145	13	PO17E	CP001473	
	245	201	13	PO17F	CP001474	
M18	201	157	15	PO17G	CP001475	
	153	107	17	PO17H	CP001476	
	181	135	17	PO17I	CP001477	
	203	157	17	PO17L	CP001478	
M20	236	190	17	PO17M	CP001479	30000
	284	238	17	PO17N	CP001480	
M24	139	90	19	PO17O	CP001481	
	176	127	19	PO17P	CP001482	
	211	162	19	PO17Q	CP001483	
	250	201	19	PO17R	CP001484	
M30	174	125	24	PO17S	CP001485	
	234	185	24	PO17T	CP001486	

Material: Internal part made of reinforced polyamide; external covering made of stainless steel AISI 304; anti-slip pad made of soft PVC 68 shore black colour.


Box quantity: 8 pieces.

Features: Comoulded anti-slip pad allows a perfect adherence with steel base. Consequent absence of internal cavities makes foot extremely cleanable.


On request

- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.

Adjustable feet (base in stainless steel) ø 95 Type: PO 18

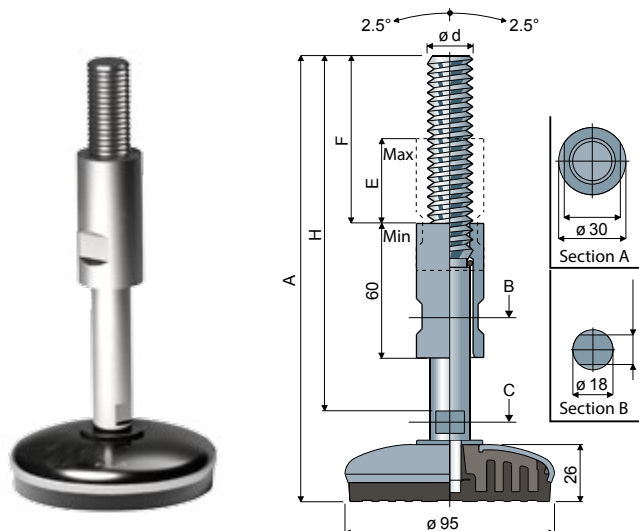


Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	21
Smm	3
ø A mm	37
Stainless steel codes	7292

Nuts UNI 5588-65 - Box quantity: 24 pieces.



ø d	M20
Smm	16
Ch. mm	30
Stainless steel codes	7278

ød	A (mm)	H (mm)	F (mm)	E (mm)	Wrench 1 (mm)	Wrench 2 (mm)	Spindle, base in stainless steel AISI 304		Max static load (N)
							Type	Code	
M20	200	159	73	39	25	13	PO18	CP001487	27000

Material: Internal part made of reinforced polyamide; external covering made of stainless steel AISI 304; anti-slip pad made of soft PVC 68 Shore black colour.



Box quantity: 8 pieces.

Features: Comoulded anti-slip pad allows a perfect adherence with steel base. Consequent absence of internal cavities makes foot extremely cleanable. The threaded insert guarantees the protection of the spindle thread.

On request

- Spindles with: Sunk hexagon head, second wrench seat head, hexagon wrench seat, threads with other pitches and lengths.
- Box quantity: According to your request. • Assembling of: Nuts • washers.

Threaded bushing (for rectangular tubes) Type: TP1

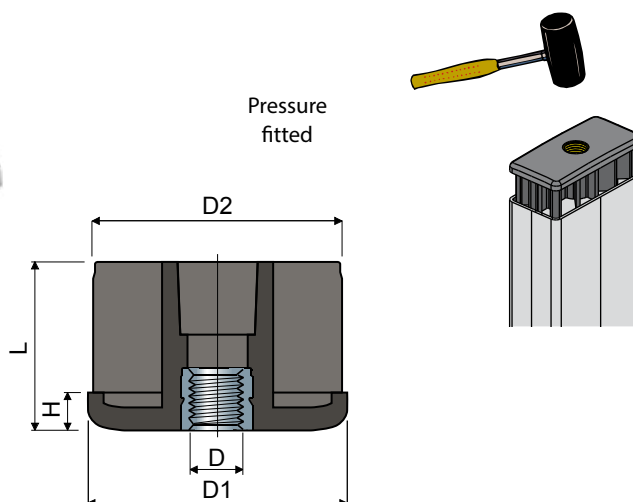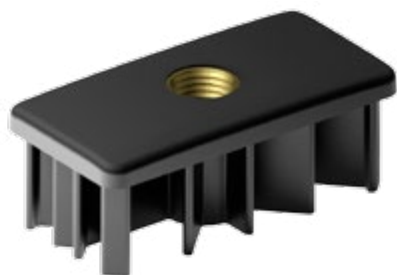

Tube dimensions								Type	Code	Max static load
Outside (mm)	Thickness (mm)	Inside (mm)	Thread D	D1 (mm)	D2 (mm)	H (mm)	L (mm)			
20x50	2	16x46	M8	20x50	16x46	5	38	TP1A	CP001488	4500
			M8	30x60	25x55	8	38	TP1B	CP001489	4500
30x60	2,5	25x55	M10	30x60	25x55	8	38	TP1C	CP001490	5000
			M12	30x60	25x55	8	38	TP1D	CP001491	5500
			M14	30x60	25x55	8	38	TP1E	CP001492	6000
			M16	30x60	25x55	8	38	TP1F	CP001493	6500
			M14	40x80	36x76	10	45	TP1G	CP001494	9000
40x80	2	36x76	M16	40x80	36x76	10	45	TP1H	CP001495	9000
			M20	40x80	36x76	10	45	TP1I	CP001496	9500
			M14	40x80	34x74	10	45	TP1L	CP001497	9000
	3	34x74	M16	40x80	34x74	10	45	TP1M	CP001498	9000
			M20	40x80	34x74	10	45	TP1N	CP001499	9500
50x100	2	46x96	M14	50x100	46x96	10	45	TP1O	CP001500	9000
			M16	50x100	46x96	10	45	TP1P	CP001501	9000
			M20	50x100	46x96	10	45	TP1Q	CP001502	9500
	3	44x94	M14	50x100	44x94	10	45	TP1R	CP001503	9000
			M16	50x100	44x94	10	45	TP1S	CP001504	9000
			M20	50x100	44x94	10	45	TP1T	CP001505	9500
50x150	3	44x144	M14	50x150	44x144	10	45	TP1U	CP001506	9000
			M16	50x150	44x144	10	45	TP1V	CP001507	9000
			M20	50x150	44x144	10	45	TP1Z	CP001508	9500
60x120	3	54x114	M14	60x120	54x114	10	45	TP1W	CP001509	9000
			M16	60x120	54x114	10	45	TP1X	CP001510	9000
			M20	60x120	54x114	10	45	TP1Y	CP001511	9500


Material: Bush in reinforced polyamide black colour; threaded insert in brass.

Box quantity: 24 pieces.

On request

- Bushes: Can be supplied with thread in inches (1/4"-20, 5/16"-18, 3/8"-16, 1/2"-13, 5/8"-11, 3/4"-10, 1"-8, ecc.); With different thicknesses and colours.
- Box quantity: According to your request.

Threaded bushings (for round tubes) Type: TP2

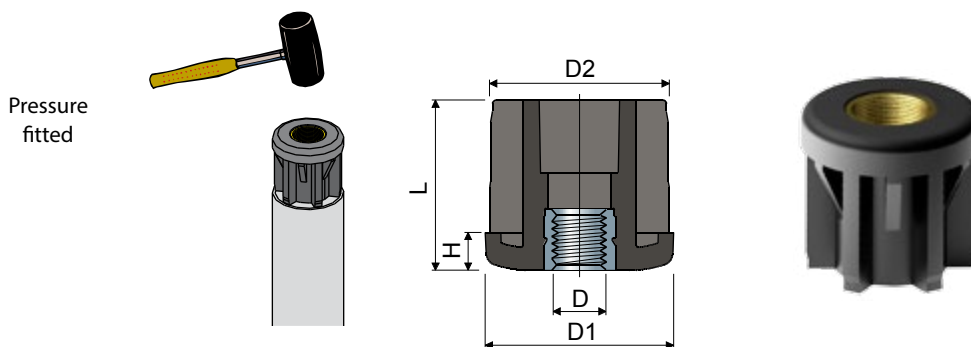

tube dimensions									Type	Code	Max static load
ø Outside	Thickness	ø Inside	Thread	D1	D2	H	L				(N)
(mm)	(inches)	(mm)	D	(mm)	(mm)	(mm)	(mm)				
30	-	1	28	M8	30	28	6	31	TP2A8	CP001512	4500
			28	M10	30	28	6	31	TP2A10	CP001513	5000
			28	M12	30	28	6	31	TP2A12	CP001514	5500
			28	M14	30	28	6	31	TP2A14	CP001515	6000
			28	M16	30	28	6	31	TP2A16	CP001516	6500
	-	1,5	27	M8	30	27	6	31	TP2B8	CP001517	4500
			27	M10	30	27	6	31	TP2B10	CP001518	5000
			27	M12	30	27	6	31	TP2B12	CP001519	5500
			27	M14	30	27	6	31	TP2B14	CP001520	6000
			27	M16	30	27	6	31	TP2B16	CP001521	6500
	-	2	26	M8	30	26	6	31	TP2C8	CP001522	4500
			26	M10	30	26	6	31	TP2C10	CP001523	5000
			26	M12	30	26	6	31	TP2C12	CP001524	5500
			26	M14	30	26	6	31	TP2C14	CP001525	6000
			26	M16	30	26	6	31	TP2C16	CP001526	6500
	-	2,5	25	M8	30	25	6	31	TP2D8	CP001527	4500
			25	M10	30	25	6	31	TP2D10	CP001528	5000
			25	M12	30	25	6	31	TP2D12	CP001529	5500
			25	M14	30	25	6	31	TP2D14	CP001530	6000
			25	M16	30	25	6	31	TP2D16	CP001531	6500
38	-	1,5	35	M8	38	35	8	38	TP2E8	CP001532	4500
			35	M10	38	35	8	38	TP2E10	CP001533	5000
			35	M12	38	35	8	38	TP2E12	CP001534	5500
			35	M14	38	35	8	38	TP2E14	CP001535	6000
			35	M16	38	35	8	38	TP2E16	CP001536	6500
	-	2	34	M8	38	34	8	38	TP2F8	CP001537	4500
			34	M10	38	34	8	38	TP2F10	CP001538	5000
			34	M12	38	34	8	38	TP2F12	CP001539	5500
			34	M14	38	34	8	38	TP2F14	CP001540	6000
			34	M16	38	34	8	38	TP2F16	CP001541	6500
	-	2,5	34	M8	38	34	8	38	TP2G8	CP001542	4500
			34	M10	38	34	8	38	TP2G10	CP001543	5000
			34	M12	38	34	8	38	TP2G12	CP001544	5500
			34	M14	38	34	8	38	TP2G14	CP001545	6000
			34	M16	38	34	8	38	TP2G16	CP001546	6500

Tube dimensions								Type	Code	Max static load	
ø Outside	Thickness	ø Inside	Thread	D1	D2	H	L				
(mm)	(pouces)	(mm)	(mm)	D	(mm)	(mm)	(mm)	(mm)		(N)	
48,3	11/2	1,5	45,3	M8	48,3	45,3	10	45	TP2M8	CP001565	7000
				M10	48,3	45,3	10	45	TP2M10	CP001566	7500
				M12	48,3	45,3	10	45	TP2M12	CP001567	8000
				M14	48,3	45,3	10	45	TP2M14	CP001568	8500
				M16	48,3	45,3	10	45	TP2M16	CP001569	9000
				M20	48,3	45,3	10	45	TP2M20	CP001570	9500
		2	44,3	M8	48,3	44,3	10	45	TP2N8	CP001571	7000
				M10	48,3	44,3	10	45	TP2N10	CP001572	7500
				M12	48,3	44,3	10	45	TP2N12	CP001573	8000
				M14	48,3	44,3	10	45	TP2N14	CP001574	8500
				M16	48,3	44,3	10	45	TP2N16	CP001575	9000
				M20	48,3	44,3	10	45	TP2N20	CP001576	9500
	2,5	43,3	M8	48,3	43,3	10	45	TP2O8	CP001577	7000	
			M10	48,3	43,3	10	45	TP2O10	CP001578	7500	
			M12	48,3	43,3	10	45	TP2O12	CP001579	8000	
			M14	48,3	43,3	10	45	TP2O14	CP001580	8500	
			M16	48,3	43,3	10	45	TP2O16	CP001581	9000	
			M20	48,3	43,3	10	45	TP2O20	CP001582	9500	
50	-	1,5	47	M8	50	47	10	45	TP2P8	CP001583	7000
				M10	50	47	10	45	TP2P10	CP001584	7500
				M12	50	47	10	45	TP2P12	CP001585	8000
				M14	50	47	10	45	TP2P14	CP001586	8500
				M16	50	47	10	45	TP2P16	CP001587	9000
				M20	50	47	10	45	TP2P20	CP001588	9500
	-	1,5	47,9	M8	50,9	47,9	10	45	TP2Q8	CP001589	7000
				M10	50,9	47,9	10	45	TP2Q10	CP001590	7500
				M12	50,9	47,9	10	45	TP2Q12	CP001591	8000
				M14	50,9	47,9	10	45	TP2Q14	CP001592	8500
				M16	50,9	47,9	10	45	TP2Q16	CP001593	9000
				M20	50,9	47,9	10	45	TP2Q20	CP001594	9500
50,9	-	2	46,9	M8	50,9	46,9	10	45	TP2R8	CP001595	7000
				M10	50,9	46,9	10	45	TP2R10	CP001596	7500
				M12	50,9	46,9	10	45	TP2R12	CP001597	8000
				M14	50,9	46,9	10	45	TP2R14	CP001598	8500
				M16	50,9	46,9	10	45	TP2R16	CP001599	9000
				M20	50,9	46,9	10	45	TP2R20	CP001600	9500
	-	2,5	45,9	M8	50,9	45,9	10	45	TP2S8	CP001601	7000
				M10	50,9	45,9	10	45	TP2S10	CP001602	7500
				M12	50,9	45,9	10	45	TP2S12	CP001603	8000
				M14	50,9	45,9	10	45	TP2S14	CP001604	8500
				M16	50,9	45,9	10	45	TP2S16	CP001605	9000
				M20	50,9	45,9	10	45	TP2S20	CP001606	9500
60,3	2	1,5	57,3	M8	60,3	57,3	12	52	TP2T8	CP001607	7000
				M10	60,3	57,3	12	52	TP2T10	CP001608	7500
				M12	60,3	57,3	12	52	TP2T12	CP001609	8000
				M14	60,3	57,3	12	52	TP2T14	CP001610	8500
				M16	60,3	57,3	12	52	TP2T16	CP001611	9000
				M20	60,3	57,3	12	52	TP2T20	CP001612	9500
		2	56,3	M24	60,3	57,3	12	52	TP2T24	CP001613	10000
				M8	60,3	56,3	12	52	TP2U8	CP001614	7000
				M10	60,3	56,3	12	52	TP2U10	CP001615	7500
				M12	60,3	56,3	12	52	TP2U12	CP001616	8000
				M14	60,3	56,3	12	52	TP2U14	CP001617	8500
				M16	60,3	56,3	12	52	TP2U16	CP001618	9000
	2,5	55,3	M20	60,3	56,3	12	52	TP2U20	CP001619	9500	
			M24	60,3	56,3	12	52	TP2U24	CP001620	10000	
			M8	60,3	55,3	12	52	TP2V8	CP001621	7000	
			M10	60,3	55,3	12	52	TP2V10	CP001622	7500	
			M12	60,3	55,3	12	52	TP2V12	CP001623	8000	
			M14	60,3	55,3	12	52	TP2V14	CP001624	8500	
		2,5	55,3	M16	60,3	55,3	12	52	TP2V16	CP001625	9000
				M20	60,3	55,3	12	52	TP2V20	CP001626	9500
				M24	60,3	55,3	12	52	TP2V24	CP001627	10000


Material: Bush in reinforced polyamide black colour; threaded insert in brass.

Box quantity: 24 pieces.

On request

- Bushes: With different thicknesses and colours.
- Box quantity: According to your request.

Threaded bushings (for square tubes) Type: TP3

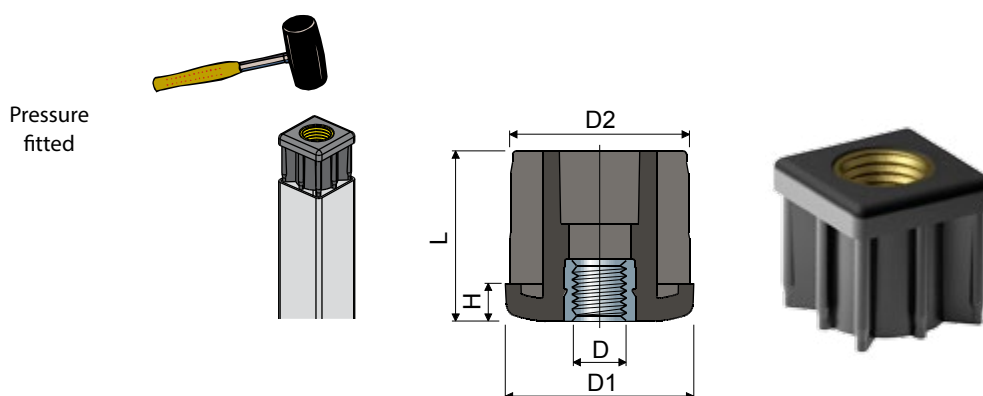

Dimensions du tube								Type	Code	Max static load (N)
Externe (mm)	Épaisseur (mm)	Interne (mm)	Filetage D	D1 (mm)	D2 (mm)	H (mm)	L (mm)			
20	1,5	17	M8	20	17	5	23	TP3A	CP001628	4500
25	1,5	22	M8	25	22	6	26	TP3B8	CP001629	4500
			M10	25	22	6	26	TP3B10	CP001630	5000
			M12	25	22	6	26	TP3B12	CP001631	5500
30	1,5	27	M8	30	27	6	31	TP3C8	CP001632	4500
			M10	30	27	6	31	TP3C10	CP001633	5000
			M12	30	27	6	31	TP3C12	CP001634	5500
			M14	30	27	6	31	TP3C14	CP001635	6000
	2	26	M16	30	27	6	31	TP3C16	CP001636	6500
			M8	30	26	6	31	TP3D8	CP001637	4500
			M10	30	26	6	31	TP3D10	CP001638	5000
			M12	30	26	6	31	TP3D12	CP001639	5500
35	1,5	32	M14	30	26	6	31	TP3D14	CP001640	6000
			M16	30	26	6	31	TP3D16	CP001641	6500
			M8	35	32	8	38	TP3E8	CP001642	6500
			M10	35	32	8	38	TP3E10	CP001643	7000
			M12	35	32	8	38	TP3E12	CP001644	7500
			M14	35	32	8	38	TP3E14	CP001645	8000
	2	31	M16	35	32	8	38	TP3E16	CP001646	8500
			M20	35	32	8	38	TP3E20	CP001647	9000
			M8	35	31	8	38	TP3F8	CP001648	6500
			M10	35	31	8	38	TP3F10	CP001649	7000
			M12	35	31	8	38	TP3F12	CP001650	7500
			M14	35	31	8	38	TP3F14	CP001651	8000
40	1,2	37,6	M16	35	31	8	38	TP3F16	CP001652	8500
			M20	35	31	8	38	TP3F20	CP001653	9000
			M8	40	37,6	8	38	TP3G8	CP001654	7000
			M10	40	37,6	8	38	TP3G10	CP001655	7500
			M12	40	37,6	8	38	TP3G12	CP001656	8000
	1,5	37	M14	40	37,6	8	38	TP3G14	CP001657	8500
			M16	40	37,6	8	38	TP3G16	CP001658	9000
			M20	40	37,6	8	38	TP3G20	CP001659	9500
			M8	40	37	8	38	TP3H8	CP001660	7000
			M10	40	37	8	38	TP3H10	CP001661	7500
	2	36	M12	40	37	8	38	TP3H12	CP001662	8000
			M14	40	37	8	38	TP3H14	CP001663	8500
			M16	40	37	8	38	TP3H16	CP001664	9000
			M20	40	37	8	38	TP3H20	CP001665	9500
			M8	40	36	8	38	TP3I8	CP001666	7000
	2,5	35	M10	40	36	8	38	TP3I10	CP001667	7500
			M12	40	36	8	38	TP3I12	CP001668	8000
			M14	40	36	8	38	TP3I14	CP001669	8500
			M16	40	36	8	38	TP3I16	CP001670	9000
			M20	40	36	8	38	TP3I20	CP001671	9500
	2,5	35	M8	40	35	8	38	TP3L8	CP001672	7000
			M10	40	35	8	38	TP3L10	CP001673	7500
			M12	40	35	8	38	TP3L12	CP001674	8000
			M14	40	35	8	38	TP3L14	CP001675	8500
			M16	40	35	8	38	TP3L16	CP001676	9000
			M20	40	35	8	38	TP3L20	CP001677	9500

Tube dimensions								Type	Code	Max static load (N)
Outside (mm)	Thickness (mm)	Inside (mm)	Thread D	D1 (mm)	D2 (mm)	H (mm)	L (mm)			
45	2	41	M8	45	41	8	38	TP3M8	CP001678	7000
			M10	45	41	8	38	TP3M10	CP001679	7500
			M12	45	41	8	38	TP3M12	CP001680	8000
			M14	45	41	8	38	TP3M14	CP001681	8500
			M16	45	41	8	38	TP3M16	CP001682	9000
			M20	45	41	8	38	TP3M16	CP001683	9500
50	1,2	47,6	M8	50	47,6	10	45	TP3N8	CP001684	7000
			M10	50	47,6	10	45	TP3N10	CP001685	7500
			M12	50	47,6	10	45	TP3N12	CP001686	8000
			M14	50	47,6	10	45	TP3N14	CP001687	8500
			M16	50	47,6	10	45	TP3N16	CP001688	9000
			M20	50	47,6	10	45	TP3N20	CP001689	9500
	1,5	47	M8	50	47	10	45	TP3O8	CP001690	7000
			M10	50	47	10	45	TP3O10	CP001691	7500
			M12	50	47	10	45	TP3O12	CP001692	8000
			M14	50	47	10	45	TP3O14	CP001693	8500
			M16	50	47	10	45	TP3O16	CP001694	9000
			M20	50	47	10	45	TP3O20	CP001695	9500
	2	46	M8	50	46	10	45	TP3P8	CP001696	7000
			M10	50	46	10	45	TP3P10	CP001697	7500
			M12	50	46	10	45	TP3P12	CP001698	8000
			M14	50	46	10	45	TP3P14	CP001699	8500
			M16	50	46	10	45	TP3P16	CP001700	9000
			M20	50	46	10	45	TP3P20	CP001701	9500
	2,5	45	M8	50	45	10	45	TP3Q8	CP001702	7000
			M10	50	45	10	45	TP3Q10	CP001703	7500
			M12	50	45	10	45	TP3Q12	CP001704	8000
			M14	50	45	10	45	TP3Q14	CP001705	8500
			M16	50	45	10	45	TP3Q16	CP001706	9000
			M20	50	45	10	45	TP3Q20	CP001707	9500
	3	44	M8	50	44	10	45	TP3R8	CP001708	7000
			M10	50	44	10	45	TP3R10	CP001709	7500
			M12	50	44	10	45	TP3R12	CP001710	8000
			M14	50	44	10	45	TP3R14	CP001711	8500
			M16	50	44	10	45	TP3R16	CP001712	9000
			M20	50	44	10	45	TP3R20	CP001713	9500
60	2	56	M8	60	56	10	45	TP3S8	CP001714	7000
			M10	60	56	10	45	TP3S10	CP001715	7500
			M12	60	56	10	45	TP3S12	CP001716	8000
			M14	60	56	10	45	TP3S14	CP001717	8500
			M16	60	56	10	45	TP3S16	CP001718	9000
			M20	60	56	10	45	TP3S20	CP001719	9500
	3	54	M8	60	54	10	45	TP3T8	CP001720	7000
			M10	60	54	10	45	TP3T10	CP001721	7500
			M12	60	54	10	45	TP3T12	CP001722	8000
			M14	60	54	10	45	TP3T14	CP001723	8500
			M16	60	54	10	45	TP3T16	CP001724	9000
			M20	60	54	10	45	TP3T20	CP001725	9500
80	3	74	M16	80	74	10	45	TP3U16	CP001726	9000
			M20	80	74	10	45	TP3U20	CP001727	9500


Material: Bush in reinforced polyamide black colour; threaded insert in brass.

Box quantity: 24 pieces.

On request

- Bushes: With different thicknesses and colours.
- Box quantity: According to your request.

Threaded bushings (for round tubes: sizes and threads in "inches") Type: TP4

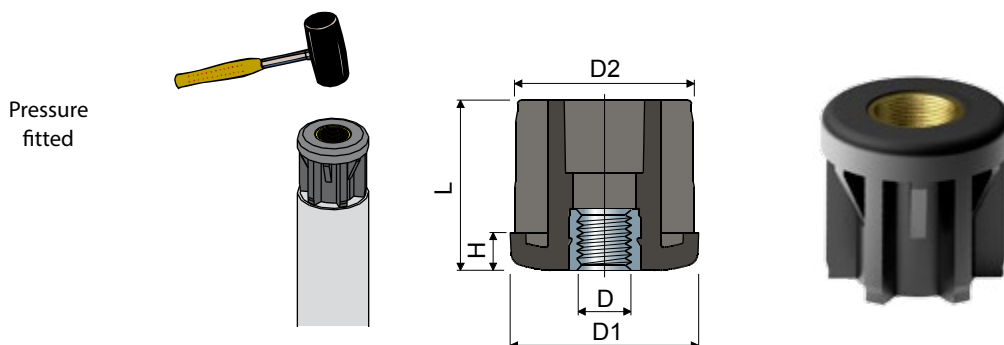

Tube dimensions											Type	Code	Max static load
ø Outside		Thickness		ø Inside	Thread D		D1	D2	H	L			
(inches)	(mm)	(inches)	(mm)	(mm)	(UNC)	(mm)	(mm)	(mm)	(mm)	(mm)			(N)
1"	(25,4)	0,083	(2,1)	21,18	1/4"-20	(6,35)	25,2	21,18	6	26	TP4A	CP001728	4500
					5/16"-18	(7,93)	25,2	21,18	6	26	TP4B	CP001729	4500
1"1/4	(31,75)	0,083	(2,1)	27,53	3/8"-16	(9,52)	31,5	27,53	6	31	TP4C	CP001730	5000
					1/2"-13	(12,7)	31,5	27,53	6	31	TP4D	CP001731	5000
					5/8"-11	(15,87)	31,5	27,53	6	31	TP4E	CP001732	6500
1"1/2	(38,1)	0,065	(1,65)	34,8	3/8"-16	(9,52)	38	34,8	8	38	TP4F	CP001733	5000
					1/2"-13	(12,7)	38	34,8	8	38	TP4G	CP001734	5000
					5/8"-11	(15,87)	38	34,8	8	38	TP4H	CP001735	6500
					3/4"-10	(19,05)	38	34,8	8	38	TP4I	CP001736	9000
					3/8"-16	(9,52)	38	33,89	8	38	TP4L	CP001737	5000
		0,083	(2,1)	33,89	1/2"-13	(12,7)	38	33,89	8	38	TP4M	CP001738	5000
					5/8"-11	(15,87)	38	33,89	8	38	TP4N	CP001739	6500
					3/4"-10	(19,05)	38	33,89	8	38	TP4O	CP001740	9000
					5/8"-11	(15,87)	44,2	38,35	8	38	TP4P	CP001741	6500
					3/4"-10	(19,05)	44,2	38,35	8	38	TP4Q	CP001742	9000
1"3/4	(44,45)	0,12	(3,04)	38,35	1"-8	(25,4)	44,2	38,35	8	38	TP4R	CP001743	10000
					3/8"-16	(9,52)	50,6	47,5	10	45	TP4S	CP001744	5000
					1/2"-13	(12,7)	50,6	47,5	10	45	TP4T	CP001745	5000
2"	(50,8)	0,065	(1,65)	47,5	5/8"-11	(15,87)	50,6	47,5	10	45	TP4U	CP001746	6500
					3/4"-10	(19,05)	50,6	47,5	10	45	TP4V	CP001747	9000
					3/8"-16	(9,52)	50,6	45,26	10	45	TP4Z	CP001748	5000
					1/2"-13	(12,7)	50,6	45,26	10	45	TP4W	CP001749	5000
					5/8"-11	(15,87)	50,6	45,26	10	45	TP4X	CP001750	6500
		0,109	(2,77)	45,26	3/4"-10	(19,05)	50,6	45,26	10	45	TP4Y	CP001751	9000
					5/8"-11	(15,87)	50,6	42,88	10	45	TP4J	CP001752	6500
					3/4"-10	(19,05)	50,6	42,88	10	45	TP4K	CP001753	9000
					1"-8	(25,4)	50,6	42,88	10	45	TP4α	CP001754	10000
					5/8"-11	(15,87)	63,3	55,58	12	52	TP4β	CP001755	6500
2"1/2	(63,5)	0,156	(3,96)	55,58	3/4"-10	(19,05)	63,3	55,58	12	53	TP4δ	CP001756	9000
					1"-8	(25,4)	63,3	55,58	12	52	TP4γ	CP001757	10000


Material: Bush in reinforced polyamide black colour; threaded insert in brass.

Box quantity: 24 pieces.

On request

- Bushes: With different thicknesses and colours.
- Box quantity: According to your request.

Threaded bushings (for square tubes: sizes and threads in "inches") Type: TP5

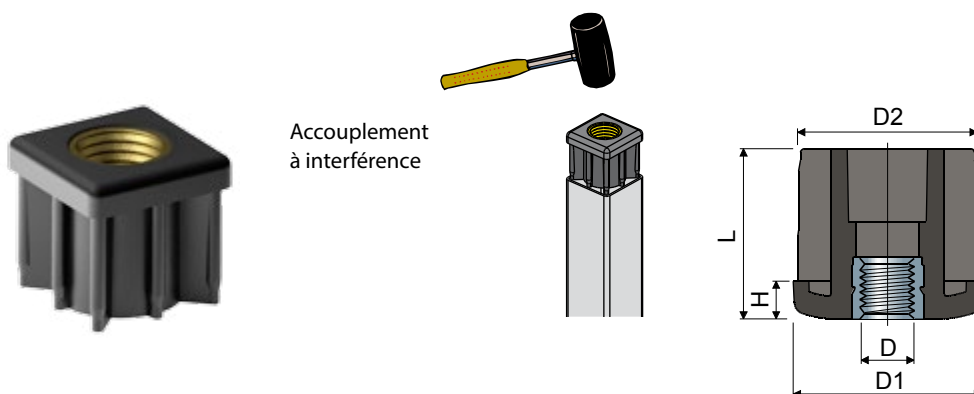

Dimensions du tube										Type	Code	Max static load (N)	
Outside (pouces)	Thickness (mm)	Thickness (pouces)	Thickness (mm)	Inside (mm)	Thread D (UNC) (mm)		D1 (mm)	D2 (mm)	H (mm)				L (mm)
1"1/2	(38,1)	0,065	(1,65)	34,8	3/8"-16	(9,52)	38	34,8	8	38	TP5A	CP001758	5000
					1/2"-13	(12,7)	38	34,8	8	38	TP5B	CP001759	5000
					5/8"-11	15,87)	38	34,8	8	38	TP5C	CP001760	6500
					3/4"-10		38	34,8	8	38	TP5D	CP001761	9000
	0,12	(3,05)	32	3/8"-16	(9,52)	38	32	8	38	TP5E	CP001762	5000	
				1/2"-13	(12,7)	38	32	8	38	TP5F	CP001763	5000	
				5/8"-11		38	32	8	38	TP5G	CP001764	6500	
				3/4"-10		38	32	8	38	TP5H	CP001765	9000	
2"	(50,8)	0,065	(1,65)	47,5	3/8"-16	(9,52)	50,6	47,5	10	45	TP5I	CP001766	5000
					1/2"-13	(12,7)	50,6	47,5	10	45	TP5L	CP001767	5000
					5/8"-11		50,6	47,5	10	45	TP5M	CP001768	6500
					3/4"-10		50,6	47,5	10	45	TP5N	CP001769	9000
	0,109	(2,77)	45,26	3/8"-16	(9,52)	50,6	45,26	10	45	TP5O	CP001770	5000	
				1/2"-13	(12,7)	50,6	45,26	10	45	TP5P	CP001771	5000	
				5/8"-11		50,6	45,26	10	45	TP5Q	CP001772	6500	
				3/4"-10		50,6	45,26	10	45	TP5R	CP001773	9000	
	0,12	(3,05)	44,7	3/8"-16	(9,52)	50,6	44,7	10	45	TP5S	CP001774	5000	
				1/2"-13	(12,7)	50,6	44,7	10	45	TP5T	CP001775	5000	
				5/8"-11		50,6	44,7	10	45	TP5U	CP001776	6500	
				3/4"-10		50,6	44,7	10	45	TP5V	CP001777	9000	


Material: Bush in reinforced polyamide black colour; threaded insert in brass.

Box quantity: 24 pieces.


On request

- Bushes: With different thicknesses and colours.
- Box quantity: According to your request.

Square flanged bearing supports Type: SF/C (SX/C) and MSF/C (MSX/C)

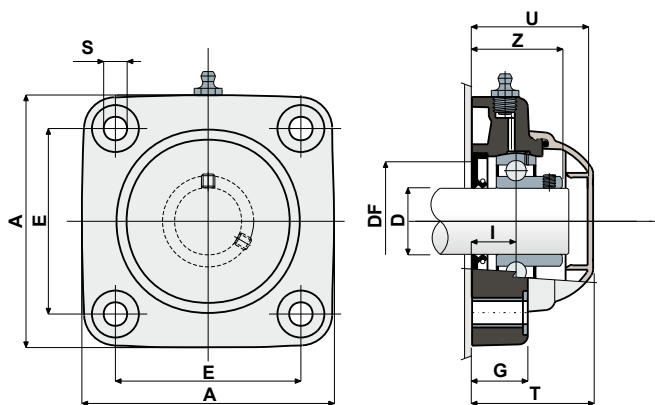

CLOSED TYPE

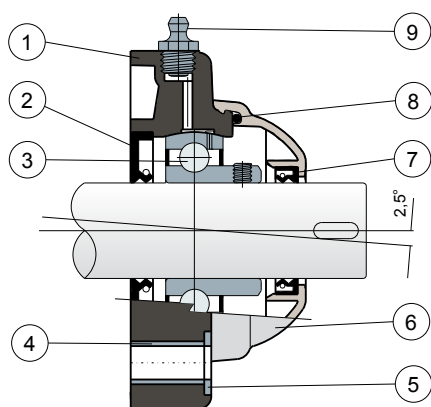

OPEN TYPE

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Protection cover made out of polypropylene (grey colour Ral 7042).
- 7) Front gasket made out of NBR rubber for turning shaft seal.
- 8) OR gasket made out of NBR rubber
- 9) Greaser for relubrication made out of nickel-plated brass.

Support dimensions respect ISO 3228 set of rules

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																		
D	CLOSED Type	OPEN Type	CODES		DIMENSIONS (mm)										Bearing load (N)		Support load	
			Closed Code	Open Code	E	A	S	G	I	Z	U	T	DF		C	C0	(N)	
													Max	Min				
20	SF/C 204	SF/C 204 A	CP000544	CP000551	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	16500	
25	SF/C 205	SF/C 205 A	CP000545	CP000552	70	99	10,5	22	17	36	47	49	50	45	14000	7800	17000	
30	SF/C 206	SF/C 206 A	CP000546	CP000553	83	113	10,5	26	20	41	54	56	60	50	19500	11300	17500	
35	SF/C 207	SF/C 207A	CP000547	CP000554	92	122	10,5	26	20	45	57	59	70	55	25500	15300	18000	
35	MSF/C 207	MSF/C 207A	CP000548	CP000555	83	113	10,5	26	19,5	45	65	68	70	55	16600	15300	18000	
40	SF/C 208	SF/C 208 A	CP000549	CP000556	102	133	10,5	26	19,5	48,5	65	68	78	65	32500	19800	18000	
40	MSF/C 208	MSF/C 208A	CP000550	CP000557	83	113	10,5	26	19,5	48,5	65	68	78	65	32500	19800	18000	

STAINLESS STEEL BEARING AISI 440C																	
D	CLOSED Type	OPEN Type	CODES		DIMENSIONS (mm)										Bearing load (N)		Support load
			Closed Code	Open Code	E	A	S	G	I	Z	U	T	DF		C	C0	(N)
													Max	Min			
20	SX/C 204	SX/C 204 A	CP000558	CP000565	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	8300	6550	16500
25	SX/C 205	SX/C 205 A	CP000559	CP000566	70	99	10,5	22	17	36	47	49	50	45	9150	7800	17000
30	SX/C 206	SX/C 206 A	CP000560	CP000567	83	113	10,5	26	20	41	54	56	60	50	12500	11200	17500
35	SX/C 207	SX/C 207 A	CP000561	CP000568	92	122	10,5	26	20	45	57	59	70	55	16600	15300	18000
35	MSX/C 207	MSX/C 206A	CP000562	CP000569	83	113	10,5	26	19,5	45	65	68	70	55	16600	15300	18000
40	SX/C 208	SX/C 208 A	CP000563	CP000570	102	133	10,5	26	19,5	48,5	65	68	78	65	20000	19000	18000
40	MSX/C 208	MSX/C 208A	CP000564	CP000571	83	113	10,5	26	19,5	48,5	65	68	78	65	20000	19000	18000




MATERIALS: Support made of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made of nickel plated brass; reinforcement bushings and washers made of stainless steel AISI 304; gaskets made of NBR rubber; cover made of polypropylene, grey colour RAL 7042.

FEATURES: Full protection of bearing against external agents. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; box quantity according to your request.

Square flanged bearing support Type: SF/CX (SX/CX) and MSF/CX (MSX/CX)

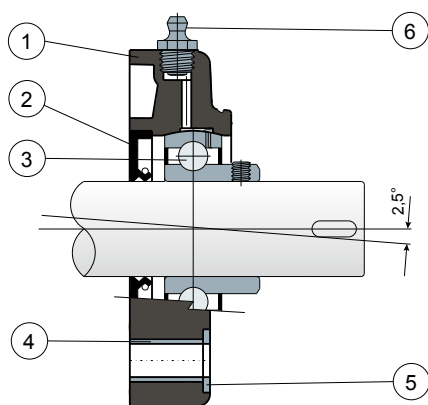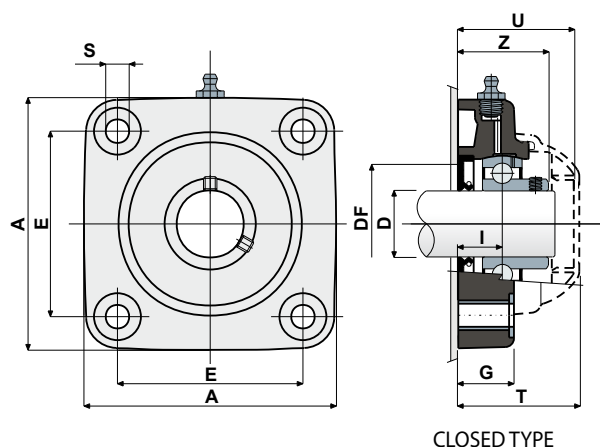

Without cover

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from SF/C (SX/C), MSF/C (MSX/C) series is lack of protection cover, which can be ordered separately as an accessory.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING

CHROME STEEL BEARING																			
D	Type	Support CODES	DIMENSIONS (mm)										Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	S	G	I	Z	U	T	DF		C	C0	(N)			Closed Code	Open Code
											Max	Min							
20	SF/CX 204	CP000572	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	16500	CF 204	CF 204 A	CP002004	CP002014
25	SF/CX 205	CP000573	70	99	10,5	22	17	36	47	49	50	45	14000	7800	17000	CF 205	CF 205 A	CP002005	CP002015
30	SF/CX 206	CP000574	83	113	10,5	26	20	41	54	56	60	50	19500	11300	17500	CF 206	CF 206 A	CP002006	CP002016
35	SF/CX 207	CP000575	92	122	10,5	26	20	45	57	59	70	55	25500	15300	18000	CF 207	CF 207 A	CP002007	CP002017
35	MSF/CX 207	CP000576	83	113	10,5	26	19,5	45	65	68	70	55	25500	15300	18000	CF 207	CF 207 A	CP002007	CP002017
40	SF/CX 208	CP000577	102	133	10,5	26	19,5	48,5	65	68	78	65	32500	19800	18000	CF 208	CF 208 A	CP002008	CP002018
40	MSF/CX 208	CP000578	83	113	10,5	26	19,5	48,5	65	68	78	65	32500	19800	18000	CF 208	CF 208 A	CP002008	CP002018

STAINLESS STEEL BEARING AISI 440C

STAINLESS STEEL BEARING AISI 440C																			
D	Type	Support CODES	DIMENSIONS (mm)										Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	S	G	I	Z	U	T	DF		C	C0	(N)			Closed Code	Open Code
											Max	Min							
20	SX/CX 204	CP000579	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	8300	6550	16500	CF 204	CF 204 A	CP002004	CP002014
25	SX/CX 205	CP000580	70	99	10,5	22	17	36	47	49	50	45	9150	7800	17000	CF 205	CF 205 A	CP002005	CP002015
30	SX/CX 206	CP000581	83	113	10,5	26	20	41	54	56	60	50	12500	11200	17500	CF 206	CF 206 A	CP002006	CP002016
35	SX/CX 207	CP000582	92	122	10,5	26	20	45	57	59	70	55	16600	15300	18000	CF 207	CF 207 A	CP002007	CP002017
35	MSX/CX 207	CP000583	83	113	10,5	26	19,5	45	65	68	70	55	16600	15300	18000	CF 207	CF 207 A	CP002007	CP002017
40	SX/CX 208	CP000584	102	133	10,5	26	19,5	48,5	65	68	78	65	20000	19000	18000	CF 208	CF 208 A	CP002008	CP002018
40	MSX/CX 208	CP000585	83	113	10,5	26	19,5	48,5	65	68	78	65	20000	19000	18000	CF 208	CF 208 A	CP002008	CP002018



MATERIALS: Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: The difference from SF/C (SX/C), MSF/C (MSX/C) series is lack of protection cover which can be ordered separately as an accessory. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; box quantity according to your request..

Square flanged bearing support Type: SF (SX) et MSF (MSX)

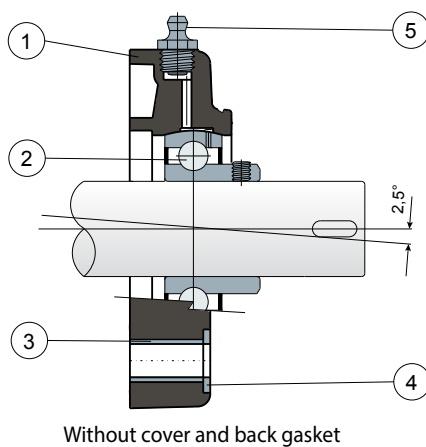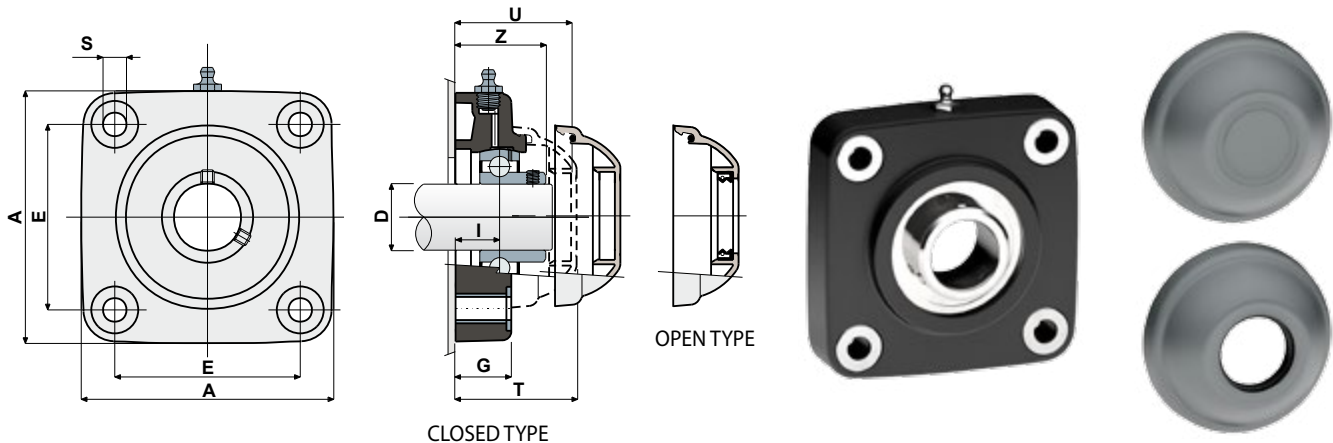

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Chrome steel or stainless steel bearing AISI 440C.
- 3) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 4) UNI 6592 support washer made out of stainless steel AISI 304.
- 5) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from SF/C (SX/C), MSF/C (MSX/C) series is lack of back gasket and protection cover, which can be ordered separately as accessories.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																	
D	Type	Support CODES	DIMENSIONS (mm)								Bearing load (N)		Support load (N)	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	S	G	I	Z	U	T	C	C0				Closed Code	Open Codet
20	SF 204	CP000588	63,5	90	10,5	19	15,5	33,5	44	46,5	12800	6600	16500	CF 204	CF 204 A	CP002004	CP002014
25	SF 205	CP000587	70	99	10,5	22	17	36	47	49	14000	7800	17000	CF 205	CF 205 A	CP002005	CP002015
30	SF 206	CP000588	83	113	10,5	26	20	41	54	56	19500	11300	17500	CF 206	CF 206 A	CP002006	CP002016
35	SF 207	CP000589	92	122	10,5	26	20	45	57	59	25500	15300	18000	CF 207	CF 207 A	CP002007	CP002017
35	MSF 207	CP000590	83	113	10,5	26	19,5	45	65	68	25500	15300	18000	CF 207	CF 207 A	CP002007	CP002017
40	SF 208	CP000591	102	133	10,5	26	19,5	48,5	65	68	32500	19800	18000	CF 208	CF 208 A	CP002008	CP002018
40	MSF 208	CP000592	83	113	10,5	26	19,5	48,5	65	68	32500	19800	18000	CF 208	CF 208 A	CP002008	CP002018

STAINLESS STEEL BEARING AISI 440C																	
D	Type	Support CODES	DIMENSIONS (mm)								Bearing load (N)		Support load (N)	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	S	G	I	Z	U	T	C	C0				Closed Code	Open Codet
20	SX 204	CP000593	63,5	90	10,5	19	15,5	33,5	44	46,5	8300	6550	16500	CF 204	CF 204 A	CP002004	CP002014
25	SX 205	CP000594	70	99	10,5	22	17	36	47	49	9150	7800	17000	CF 205	CF 205 A	CP002005	CP002015
30	SX 206	CP000595	83	113	10,5	26	20	41	54	56	12500	11200	17500	CF 206	CF 206 A	CP002006	CP002016
35	SX 207	CP000596	92	122	10,5	26	20	45	57	59	16600	15300	18000	CF 207	CF 207 A	CP002007	CP002017
35	MSX 207	CP000597	83	113	10,5	26	19,5	45	65	68	16600	15300	18000	CF 207	CF 207 A	CP002007	CP002017
40	SX 208	CP000598	102	133	10,5	26	19,5	48,5	65	68	20000	19000	18000	CF 208	CF 208 A	CP002008	CP002018
40	MSX 208	CP000599	83	113	10,5	26	19,5	48,5	65	68	20000	19000	18000	CF 208	CF 208 A	CP002008	CP002018



MATERIALS: Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: The difference from SF/C (SX/C), MSF/C (MSX/C) series is lack of back gasket and protection cover, which can be ordered separately as accessories. Assembly with shouldered and not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; box quantity according to your request..couleur différente et avec logo personnalisé; conditionnement hors standard.

Square flanged bearing supports Type: SF/CS et MSF/CS

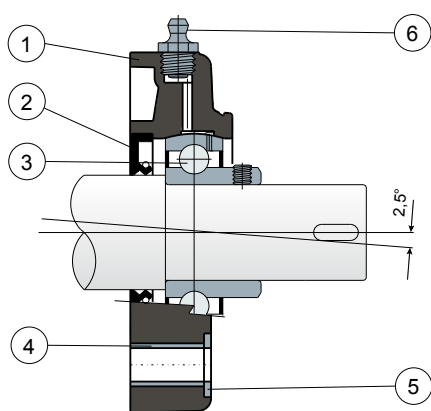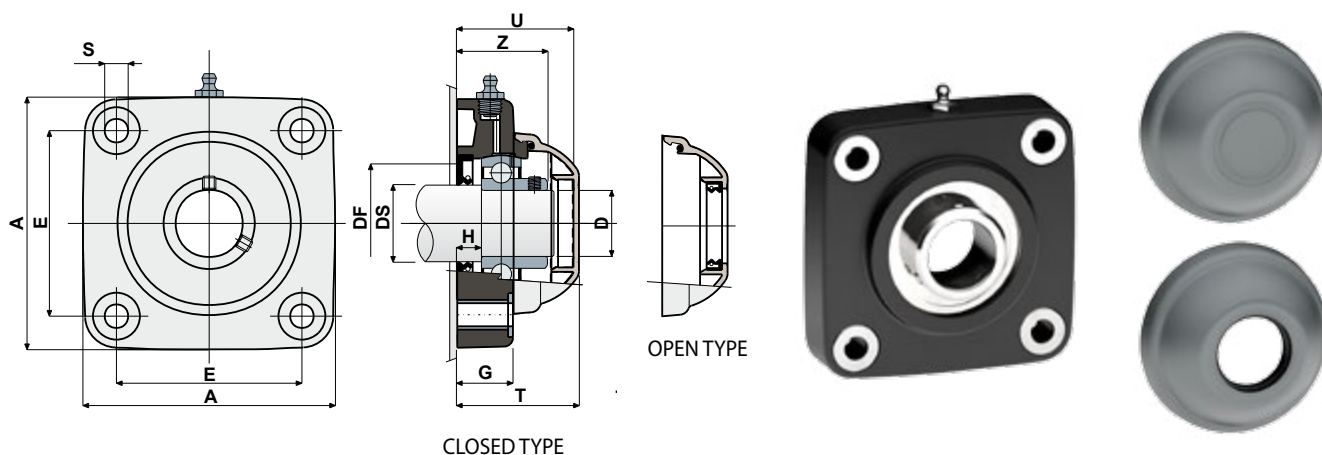

Back gasket for shouldered shaft

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser for relubrication made out of nickel-plated brass.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																				
DS	D	Type	CODES Support	DIMENSIONS (mm)										Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES	
				E	A	S	G	H	Z	U	T	DF		C	C0				(N)	Closed Code
												Max	Min							
25	20	SF/CS 204	CP000600	63,5	90	10,5	19	8,5	33,5	44	46,5	45	40	12800	6600	16500	CF 204	CF 204 A	CP002004	CP002014
30	25	SF/CS 205	CP000601	70	99	10,5	22	10	36	47	49	50	45	14000	7800	17000	CF 205	CF 205 A	CP002005	CP002015
35	30	SF/CS 206	CP000602	83	113	10,5	26	11,5	41	54	56	60	50	19500	11300	17500	CF 206	CF 206 A	CP002006	CP002016
40	35	SF/CS 207	CP000603	92	122	10,5	26	10,5	45	57	59	70	55	25500	15300	18000	CF 207	CF 207 A	CP002007	CP002017
45	40	SF/CS 208	CP000604	102	133	10,5	26	9	48,5	65	68	78	65	32500	19800	18000	CF 208	CF 208 A	CP002008	CP002018
45	40	MSF/CS 208	CP000605	83	113	10,5	26	9	48,5	65	68	78	65	32500	19800	18000	CF 208	CF 208 A	CP002008	CP002018



MATERIALS: Support made out of PA + glass fiber black colour; chrome steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: Back gasket for shouldered shafts. Use of shouldered shafts allows a higher capability of axial load. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; bearing made out of AISI 440C stainless steel; box quantity according to your request.

Square flanged bearing supports Type: SF/CA (SX/CA)

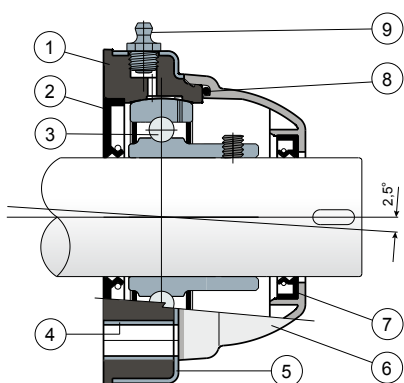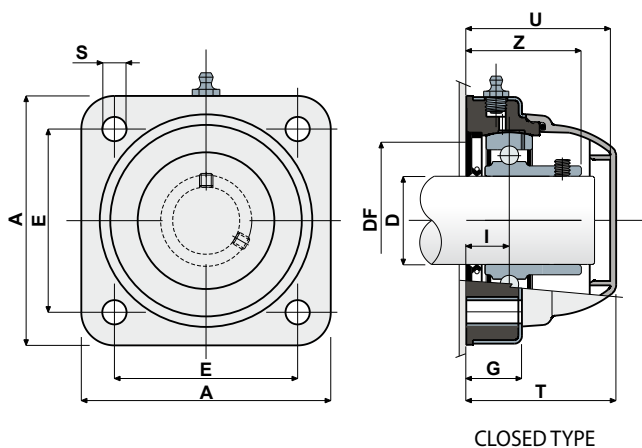

External cover made out of stainless steel AISI 304

OPEN TYPE

- 1) Internal body of support made out of polypropylene reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) External cover of support made out of AISI 304 stainless steel.
- 6) Protection cover made out of polypropylene (grey colour Ral 7042).
- 7) Front gasket made out of NBR rubber for turning shaft seal.
- 8) OR gasket made out of NBR rubber
- 9) Greaser for relubrication made out of nickel-plated brass.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																	
D	CLOSED Type	OPEN Type	CODES		DIMENSIONS (mm)								DF		Bearing load (N)		Support load
			Closed Code	Open Code	E	A	S	G	I	Z	U	T	Max	Min	C	C0	(N)
30	SF/CA 206	SF/CA 206A	CP000606	CP000609	83	113	11	27	20	41	65	68	60	50	19500	11300	17500
35	SF/CA 207	SF/CA 207A	CP000607	CP000610	83	113	11	27	19,5	45	65	68	70	55	25500	15300	18000
40	SF/CA 208	SF/CA 208A	CP000608	CP000611	83	113	11	27	19,5	48,5	65	68	78	65	32500	19800	18000

STAINLESS STEEL BEARING AISI 440C																	
D	CLOSED Type	OPEN Type	CODES		DIMENSIONS (mm)								DF		Charge roulement (N)		Charge support
			Closed Code	Open Code	E	A	S	G	I	Z	U	T	Max	Min	C	C0	(N)
30	SX/CA 206	SX/CA 206A	CP000612	CP000615	83	113	11	27	20	41	65	68	60	50	12500	11200	17500
35	SX/CA 207	SX/CA 207A	CP000613	CP000616	83	113	11	27	19,5	45	65	68	70	55	16600	15300	18000
40	SX/CA 208	SX/CA 208A	CP000614	CP000617	83	113	11	27	19,5	48,5	65	68	78	65	20000	19000	18000


MATERIALS: Support made out of PP + glass fiber; external cover of support made out of AISI 304 stainless steel; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings made out of AISI 304 stainless steel; gaskets made out of NBR rubber; protection cover made out of polypropylene grey colour RAL 7042.

FEATURES: Full protection of bearing against external agents. Support body made out of polypropylene covered by an AISI 304 stainless steel later, to obtain the maximum chemical resistance to antibacterial detergents used in food processing field. More over this part is moulded without internal cavities in order to obtain the best sanification. Assembly with not shouldered shaft. Maximum shaft alignment error 2.5°.


BOX QUANTITY: 8 pieces.

ON REQUEST: Protection cover in different colours and with personalized brand; box quantity according to your request.


Square flanged bearing supports Type: SF/CXA (SX/CXA)

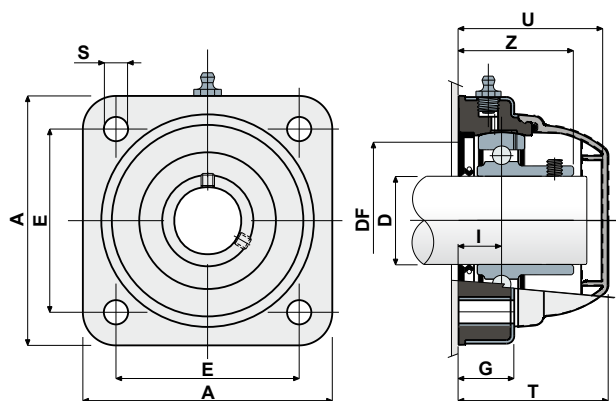

CLOSED TYPE



OPEN TYPE

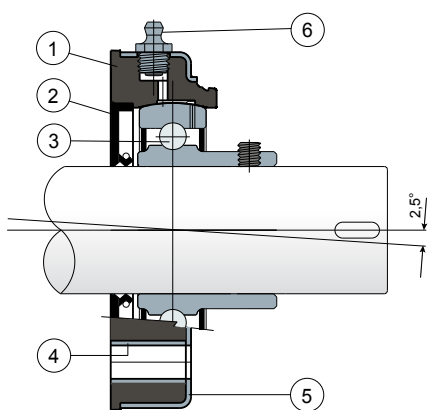

External cover made out of stainless steel AISI 304,
without protection cover.

- 1) Internal body of support made out of polypropylene reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) External cover of support made out of AISI 304 stainless steel.
- 6) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from SF/CA (SX/CA) series is lack of protection cover, which can be ordered separately as an accessory.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																			
D	Type	Support CODES	DIMENSIONS (mm)										Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	S	G	I	Z	U	T	DF		C	C0	(N)			Closed Code	Open Code
											Max	Min							
30	SF/CXA 206	CP000618	83	113	11	27	20	41	65	68	60	50	19500	11300	17500		CF 206 A	CP002016	
35	SF/CXA 207	CP000619	83	113	11	27	19,5	45	65	68	70	55	25500	15300	18000	CF 207	CF 207 A	CP002017	
40	SF/CXA 208	CP000620	83	113	11	27	19,5	48,5	65	68	78	65	32500	19800	18000		CF 208 A	CP002018	

STAINLESS STEEL BEARING AISI 440C																			
D	Type	Support CODES	DIMENSIONS (mm)									Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES		
			E	A	S	G	I	Z	U	T	DF		C	C0			(N)	Closed Code	Open Code
											Max	Min							
30	SX/CXA 206	CP000621	83	113	11	27	20	41	65	68	60	50	12500	11200	17500		CF 206 A	CP002016	
35	SX/CXA 207	CP000622	83	113	11	27	19,5	45	65	68	70	55	16600	15300	18000	CF 207	CF 207 A	CP002017	
40	SX/CXA 208	CP000623	83	113	11	27	19,5	48,5	65	68	78	65	20000	19000	18000		CF 208 A	CP002018	



MATERIALS: Support made out of PP + glass fiber; external cover of support made out of AISI 304 stainless steel; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings made out of AISI 304 stainless steel; gaskets made out of NBR rubber; protection cover made out of polypropylene grey colour RAL 7042.

FEATURES: The only difference from SF/CA (SX/CA) series is lack of protection cover, which can be ordered separately as an accessory. Support body made out of polypropylene covered by an AISI 304 stainless steel later, to obtain the maximum chemical resistance to antibacterial detergents used in food processing field. Moreover this part is moulded without internal cavities in order to obtain the best sanitation. Assembly with not shouldered shaft. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Protection cover in different colours and with personalized brand; box quantity according to your request.

Oval flanged bearing supports Type: SFL/C (SXL/C)

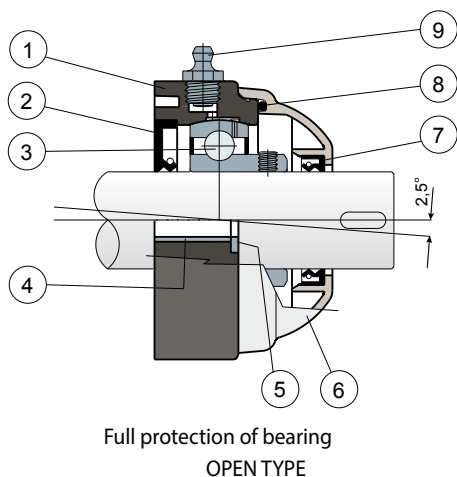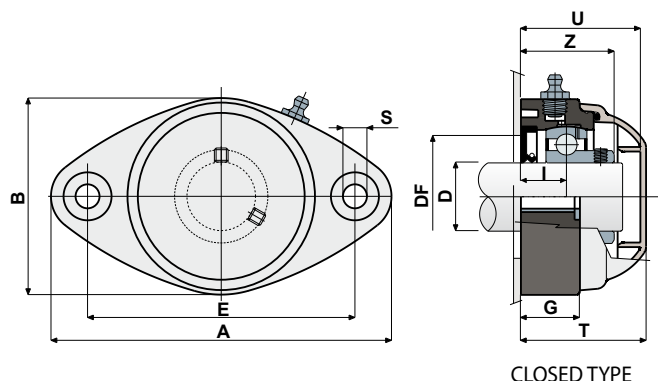

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Protection cover made out of polypropylene (grey colour Ral 7042).
- 7) Front gasket made out of NBR rubber for turning shaft seal.
- 8) OR gasket made out of NBR rubber
- 9) Greaser for relubrication made out of nickel-plated brass.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																		
D	CLOSED Type	OPEN Type	CODES		DIMENSIONS (mm)										Bearing load (N)		Support load	
			Closed Code	Open Code	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)
														Max	Min			
20	SFL/C 204	SFL/C 204A	CP000624	CP000628	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	8500
25	SFL/C 205	SFL/C 205A	CP000625	CP000629	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000
30	SFL/C 206	SFL/C 206A	CP000626	CP000630	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000
35	SFL/C 207	SFL/C 207A	CP000627	CP000631	130	163	94	10,5	26	20	45	57	59	70	55	25500	15300	14000

STAINLESS STEEL BEARING AISI 440C																		
D	CLOSED Type	OPEN Type	CODES		DIMENSIONS (mm)										Bearing load (N)		Support load	
			Closed Code	Open Code	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)
														Max	Min			
20	SXL/C 204	SXL/C 204A	CP000632	CP000636	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	8300	6550	8500
25	SXL/C 205	SXL/C 205A	CP000633	CP000637	99	131	72	10,5	22	17	36	47	49	50	45	9150	7800	10000
30	SXL/C 206	SXL/C 206A	CP000634	CP000638	117	149	86	10,5	26	20	41	54	56	60	50	12500	11200	13000
35	SXL/C 207	SXL/C 207A	CP000635	CP000639	130	163	94	10,5	26	20	45	57	59	70	55	16600	15300	14000



MATERIALS: Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: Full protection of bearing against external agents. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; box quantity according to your request.

Oval flanged bearing supports Type: SFL/CX (SXL/CX)

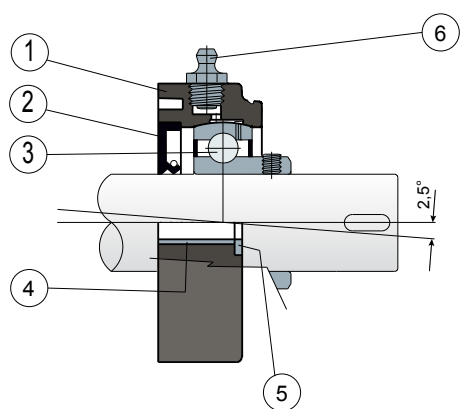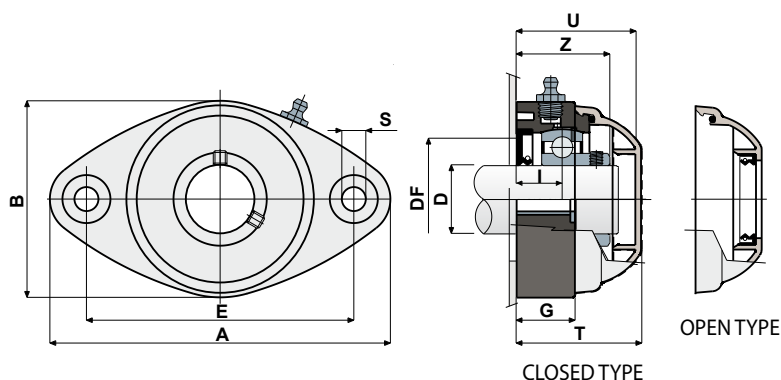

Without protection cover

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from SFL/C (SXL/C) series is lack of protection cover, which can be ordered separately as an accessory.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																				
D	Type	CODES Support	DIMENSIONS (mm)											Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)			Closed Code	Open Code
												Max	Min							
20	SFL/CX 204	CP000640	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	8500	CF 204	CF 204 A	CP002004	CP002014
25	SFL/CX 205	CP000641	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000	CF 205	CF 205 A	CP002005	CP002015
30	SFL/CX 206	CP000642	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000	CF 206	CF 206 A	CP002006	CP002016
35	SFL/CX 207	CP000643	130	163	94	10,5	26	20	45	57	59	70	55	25500	15300	14000	CF 207	CF 207 A	CP002007	CP002017

STAINLESS STEEL BEARING AISI 440C																				
D	Type	CODES Support	DIMENSIONS (mm)											Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)			Closed Code	Open Code
												Max	Min							
20	SXL/CX 204	CP000644	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	8300	6550	8500	CF 204	CF 204 A	CP002004	CP002014
25	SXL/CX 205	CP000645	99	131	72	10,5	22	17	36	47	49	50	45	9150	7800	10000	CF 205	CF 205 A	CP002005	CP002015
30	SXL/CX 206	CP000646	117	149	86	10,5	26	20	41	54	56	60	50	12500	11200	13000	CF 206	CF 206 A	CP002006	CP002016
35	SXL/CX 207	CP000647	130	163	94	10,5	26	20	45	57	59	70	55	16600	15300	14000	CF 207	CF 207 A	CP002007	CP002017

MATERIALS: Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.




FEATURES: The difference from SFL/C (SXL/C) series is lack of protection cover which can be ordered separately as an accessory.

Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; box quantity according to your request.

Oval flanged bearing supports Type: SFL (SXL)

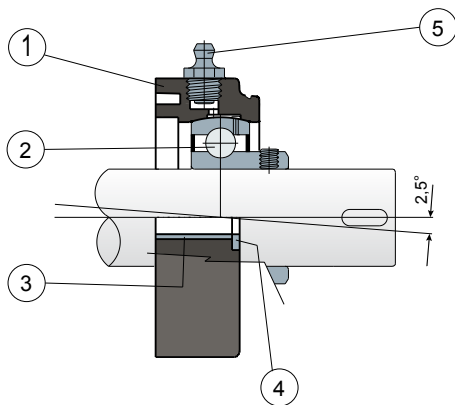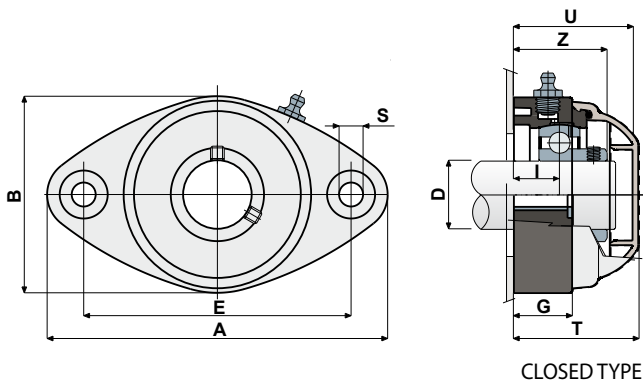

Without cover and back gasket

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Chrome steel or stainless steel bearing AISI 440C.
- 3) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 4) UNI 6592 support washer made out of stainless steel AISI 304.
- 5) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from SFL/C (SXL/C) series is lack of back gasket and protection cover, which can be ordered separately as accessories.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																		
D	Type	Support CODES	DIMENSIONS (mm)									Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	B	S	G	I	Z	U	T	C	C0	(N)			Closed Code	Open Codet
20	SFL 204	CP000648	90	118	64	10,5	19	15,5	33,5	44	46,5	12800	6600	8500	SF 204	SF 204 A	CP002004	CP002014
25	SFL 205	CP000649	99	131	72	10,5	22	17	36	47	49	14000	7800	10000	SF 205	SF 205 A	CP002005	CP002015
30	SFL 206	CP000650	117	149	86	10,5	26	20	41	54	56	19500	11300	13000	SF 206	SF 206 A	CP002006	CP002016
35	SFL 207	CP000651	130	163	94	10,5	26	20	45	57	59	25500	15300	14000	SF 207	SF 206 A	CP002007	CP002017

STAINLESS STEEL BEARING AISI 440C																		
D	Type	Support CODES	DIMENSIONS (mm)									Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	B	S	G	I	Z	U	T	C	C0	(N)			Closed Code	Open Codet
20	SXL 204	CP000652	90	118	64	10,5	19	15,5	33,5	44	46,5	8500	6550	8500	SF 204	SF 204 A	CP002004	CP002014
25	SXL 205	CP000653	99	131	72	10,5	22	17	36	47	49	9150	7800	10000	SF 205	SF 205 A	CP002005	CP002015
30	SXL 206	CP000654	117	149	86	10,5	26	20	41	54	56	12500	11200	13000	SF 206	SF 206 A	CP002006	CP002016
35	SXL 207	CP000655	130	163	94	10,5	26	20	45	57	59	16600	15300	14000	SF 207	SF 206 A	CP002007	CP002017



MATERIALS: Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: The difference from SFL/C (SXL/C) series is lack of back gasket and protection cover, which can be ordered separately as accessories. Assembly with shouldered and not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; box quantity according to your request. couleur différente et avec logo personnalisé; conditionnement hors standard.

Oval flanged bearing supports Type: SFL/CS

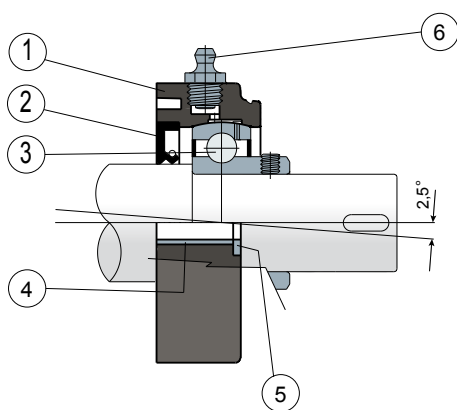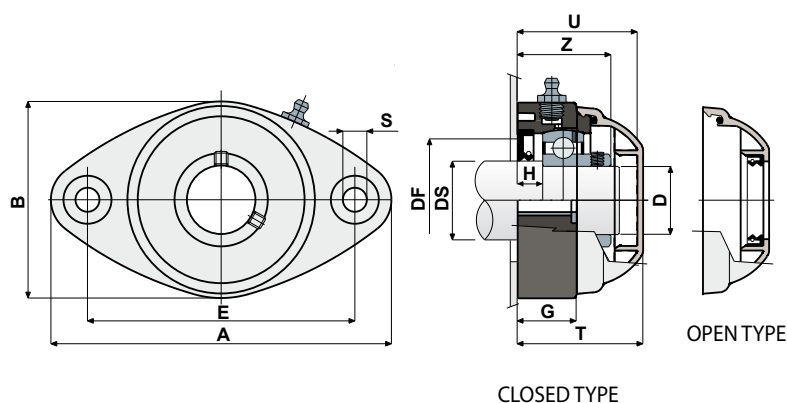

Back gasket for shouldered shaft

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser for relubrication made out of nickel-plated brass.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																					
DS	D	Type	Support CODES	DIMENSIONS (mm)										Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES		
				E	A	B	S	G	H	Z	U	T	DF		C	C0			(N)	Closed Code	Open Code
													Max	Min							
25	20	SFL/CS 204	CP000656	90	118	64	10,5	19	8,5	33,5	44	46,5	45	40	12800	6600	8500	CF 204	CF 204 A	CP002004	CP002014
30	25	SFL/CS 205	CP000657	99	131	72	10,5	22	10	36	47	49	50	45	14000	7800	10000	CF 205	CF 205 A	CP002005	CP002015
35	30	SFL/CS 206	CP000658	117	149	86	10,5	26	11,5	41	54	56	60	50	19500	11300	13000	CF 206	CF 206 A	CP002006	CP002016
40	35	SFL/CS 207	CP000659	130	163	94	10,5	26	10,5	45	57	59	70	55	25500	15300	14000	CF 207	CF 207 A	CP002007	CP002017


MATERIALS: Support made out of PA + glass fiber black colour; chrome steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: Back gasket for shouldered shafts. Use of shouldered shafts allows a higher capability of axial load. Maximum shaft alignment error 2,5°.


BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; bearing made out of AISI 440C stainless steel; box quantity according to your request.

Oval flanged bearing supports Type: MSFL/C (MSXL/C)

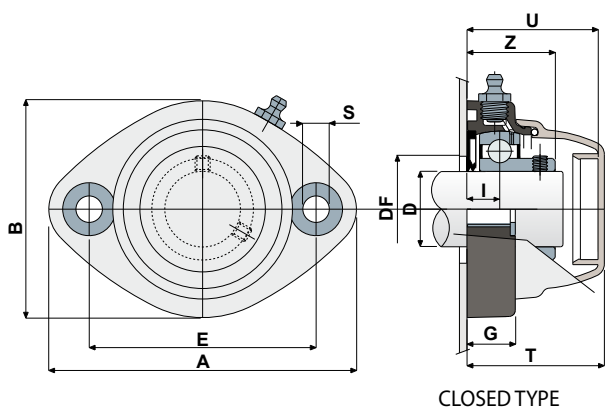

CLOSED TYPE

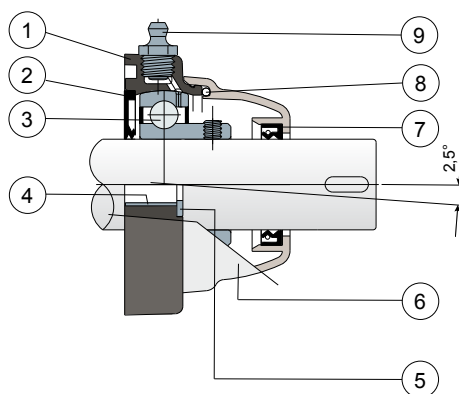

Full protection of bearing

OPEN TYPE

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Protection cover made out of polypropylene (grey colour Ral 7042).
- 7) Front gasket made out of NBR rubber for turning shaft seal.
- 8) OR gasket made out of NBR rubber
- 9) Greaser for relubrication made out of nickel-plated brass.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																		
D	CLOSED Type	OPEN Type	CODES		DIMENSIONS (mm)										Bearing load (N)		Support load	
			Closed Code	Open Code	E	A	B	S	G	I	Z	U	T	DF Max Min	C	C0	(N)	
20	MSFL/C 204	MSFL/C 204 A	CP000660	CP000663	90	122	86	10,5	19	16	34	44	46,5	45 40	12800	6600	8500	
25	MSFL/C 205	MSFL/C 205 A	CP000661	CP000664	90	122	86	10,5	19	15,5	35	44	46,5	50 45	14000	7800	10000	
30	MSFL/C 20	MSFL/C 206 A	CP000662	CP000665	90	122	86	10,5	19	13	35	52	54,5	60 50	19500	11300	13000	

STAINLESS STEEL BEARING AISI 440C																		
D	CLOSED Type	OPEN Type	CODES		DIMENSIONS (mm)										Bearing load (N)		Support load	
			Closed Code	Open Code	E	A	B	S	G	I	Z	U	T	DF Max Min	C	C0	(N)	
20	MSXL/C 204	MSXL/C 204 A	CP000666	CP000669	90	122	86	10,5	19	16	34	44	46,5	45 40	12800	6600	8500	
25	MSXL/C 205	MSXL/C 205 A	CP000667	CP000670	90	122	86	10,5	19	15,5	35	44	46,5	50 45	14000	7800	10000	
30	MSXL/C 206	MSXL/C 206 A	CP000668	CP000671	90	122	86	10,5	19	13	35	52	54,5	60 50	19500	11300	13000	



MATERIALS: Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing, greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: Full protection of bearing against external agents. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; box quantity according to your request.

Oval flanged bearing supports Type: MSFL/CX (MSXL/CX)

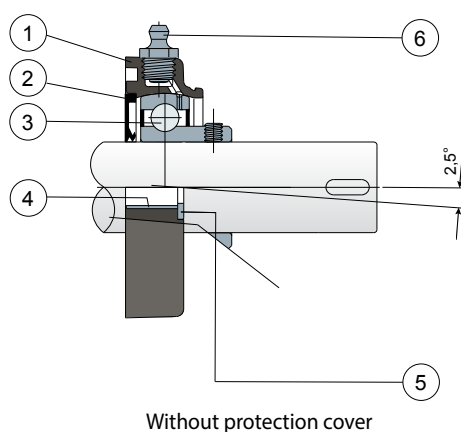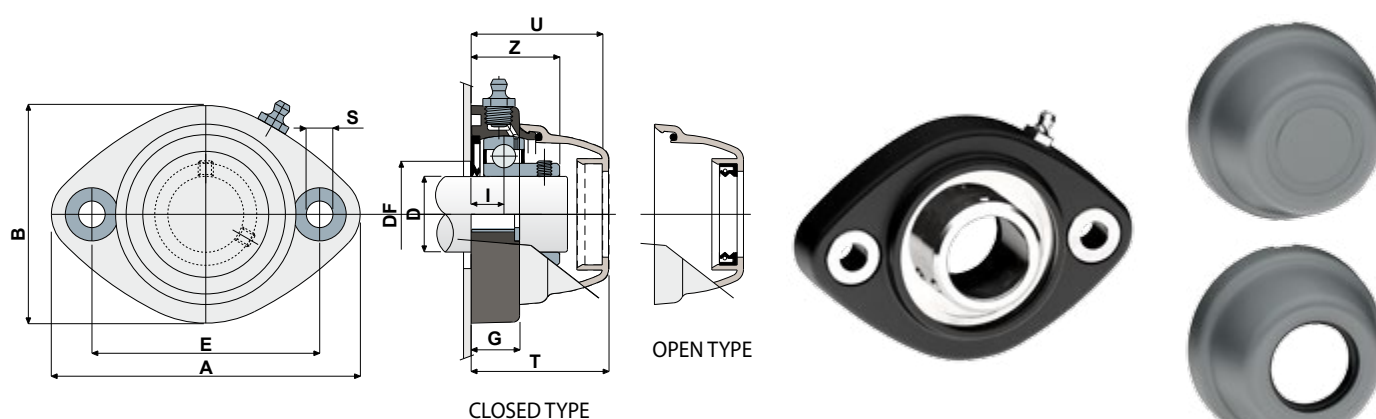

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from MSFL/C (MSXL/C) series is lack of protection cover, which can be ordered separately as an accessory.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																			
D	Type	Support CODES	DIMENSIONS (mm)										Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	B	S	G	I	Z	U	T	DF Max Min	C	C0	(N)			Closed Code	Open Code
20	MSFL/CX 204	CP000672	90	122	86	10,5	19	16	34	44	46,5	45 40	12800	6600	8500	SF 204	SF 204 A	CP002004	CP002014
25	MSFL/CX 205	CP000673	90	122	86	10,5	19	15,5	35	44	46,5	50 45	14000	7800	10000	SF 205	SF 205 A	CP002005	CP002015
30	MSFL/CX 206	CP000674	90	122	86	10,5	19	13	35	52	54,5	60 50	19500	11300	13000	SF 206	SF 206 A	CP002006	CP002016

STAINLESS STEEL BEARING AISI 440C																			
D	Type	Support CODES	DIMENSIONS (mm)										Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	B	S	G	I	Z	U	T	DF Max Min	C	C0	(N)			Closed Code	Open Code
20	MSXL/CX 204	CP000675	90	122	86	10,5	19	16	34	44	46,5	45 40	12800	6600	8500	SF 204	SF 204 A	CP002004	CP002014
25	MSXL/CX 205	CP000676	90	122	86	10,5	19	15,5	35	44	46,5	50 45	14000	7800	10000	SF 205	SF 205 A	CP002005	CP002015
30	MSXL/CX 206	CP000677	90	122	86	10,5	19	13	35	52	54,5	60 50	19500	11300	13000	SF 206	SF 206 A	CP002006	CP002016



MATERIALS: Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: The difference from MSFL/C (MSXL/C) series is lack of protection cover which can be ordered separately as an accessory. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; box quantity according to your request.

Oval flanged bearing supports Type: MSFL (MSXL)

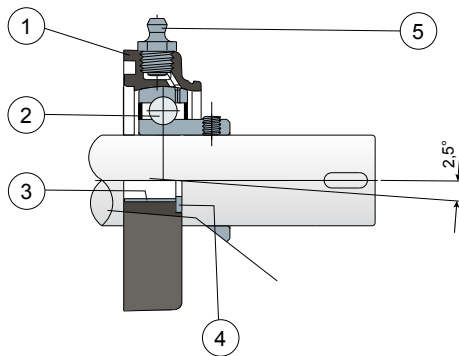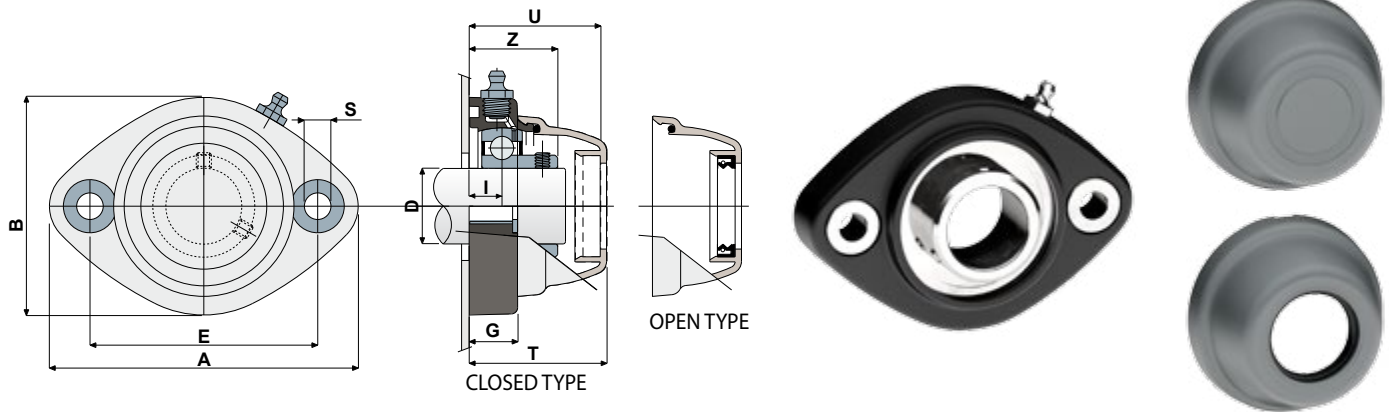

Without cover and back gasket

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Chrome steel or stainless steel bearing AISI 440C.
- 3) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 4) UNI 6592 support washer made out of stainless steel AISI 304.
- 5) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from MSFL/C (MSXL/C) series is lack of back gasket and protection cover, which can be ordered separately as accessories.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																		
D	Type	Support CODES	DIMENSIONS (mm)									Bearing load (N)		Support load (N)	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	B	S	G	I	Z	U	T	C	C0				Closed Code	Open Codet
20	MSFL 204	CP000678	90	122	86	10,5	19	16	34	44	46,5	12800	6600	8500	SF 204	SF 204 A	CP002004	CP002014
25	MSFL 205	CP000679	90	122	86	10,5	19	15,5	35	44	46,5	14000	7800	10000	SF 205	SF 205 A	CP002005	CP002015
30	MSFL 206	CP000680	90	122	86	10,5	19	13	35	52	54,5	19500	11300	13000	SF 206	SF 206 A	CP002006	CP002016

STAINLESS STEEL BEARING AISI 440C																		
D	Type	Support CODES	DIMENSIONS (mm)									Bearing load (N)		Support load (N)	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	B	S	G	I	Z	U	T	C	C0				Closed Code	Open Codet
20	MSXL 204	CP000681	90	122	86	10,5	19	16	34	44	46,5	12800	6600	8500	SF 204	SF 204 A	CP002004	CP002014
25	MSXL 205	CP000682	90	122	86	10,5	19	15,5	35	44	46,5	14000	7800	10000	SF 205	SF 205 A	CP002005	CP002015
30	MSXL 206	CP000683	90	122	86	10,5	19	13	35	52	54,5	19500	11300	13000	SF 206	SF 206 A	CP002006	CP002016



MATERIALS: Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: The difference from MSFL/C (MSXL/C) series is lack of back gasket and protection cover, which can be ordered separately as accessories. Assembly with shouldered and not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; box quantity according to your request.

Side flanged bearing supports Type: SFB/C (SXB/C)

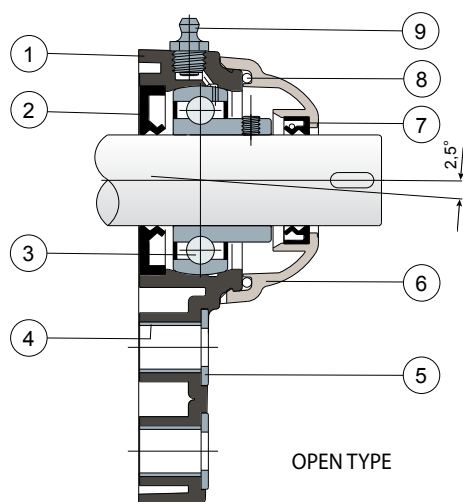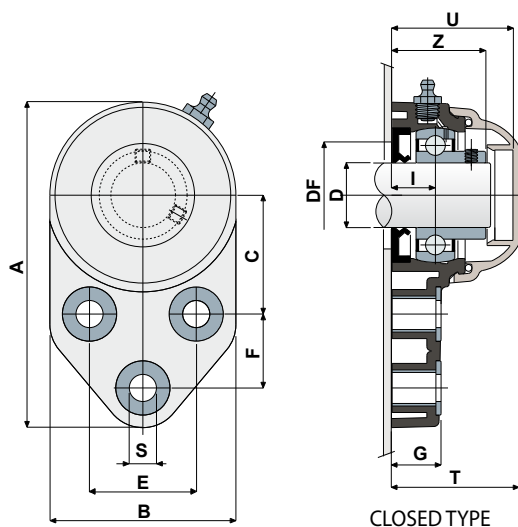

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Protection cover made out of polypropylene (grey colour Ral 7042).
- 7) Front gasket made out of NBR rubber for turning shaft seal.
- 8) OR gasket made out of NBR rubber
- 9) Greaser for relubrication made out of nickel-plated brass.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																				
D	CLOSED Type	OPEN Type	CODES		DIMENSIONS (mm)													Bearing load (N)		Support load
			Closed Code	Open Code	E	A	B	C	F	S	G	I	Z	U	T	DF		C	C0	(N)
																Max	Min			
20	SFB/C 204	SFB/C 204 A	CP000684	CP000687	41,3	125	72	46	28,6	10,5	19	18	36	47	49,5	45	40	12800	6600	8500
25	SFB/C 205	SFB/C 205 A	CP000685	CP000688	41,3	125	72	46	28,6	10,5	19	17	36,5	47	49,5	50	45	14000	7800	9000
40	SFB/C 208	SFB/C 208 A	CP000686	CP000689	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	78	65	32500	19800	18000

STAINLESS STEEL BEARING AISI 440C																				
D	CLOSED Type	OPEN Type	CODES		DIMENSIONS (mm)													Bearing load (N)		Support load
			Code Fermé	Code Ouvert	E	A	B	C	F	S	G	I	Z	U	T	DF		C	C0	(N)
																Max	Min			
20	SXB/C 204	SXB/C 204 A	CP000690	CP000693	41,3	125	72	46	28,6	10,5	19	17,5	35,5	47	49,5	45	40	12800	6600	8500
25	SXB/C 205	SXB/C 205 A	CP000691	CP000694	41,3	125	72	46	28,6	10,5	19	17	36,5	47	49,5	50	45	14000	7800	9000
40	SXB/C 208	SXB/C 208 A	CP000692	CP000695	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	78	65	32500	19800	18000


MATERIALS: Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing, greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: Full protection of bearing against external agents. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; box quantity according to your request.

Side flanged bearing supports Type: SFB/CX (SXB/CX)

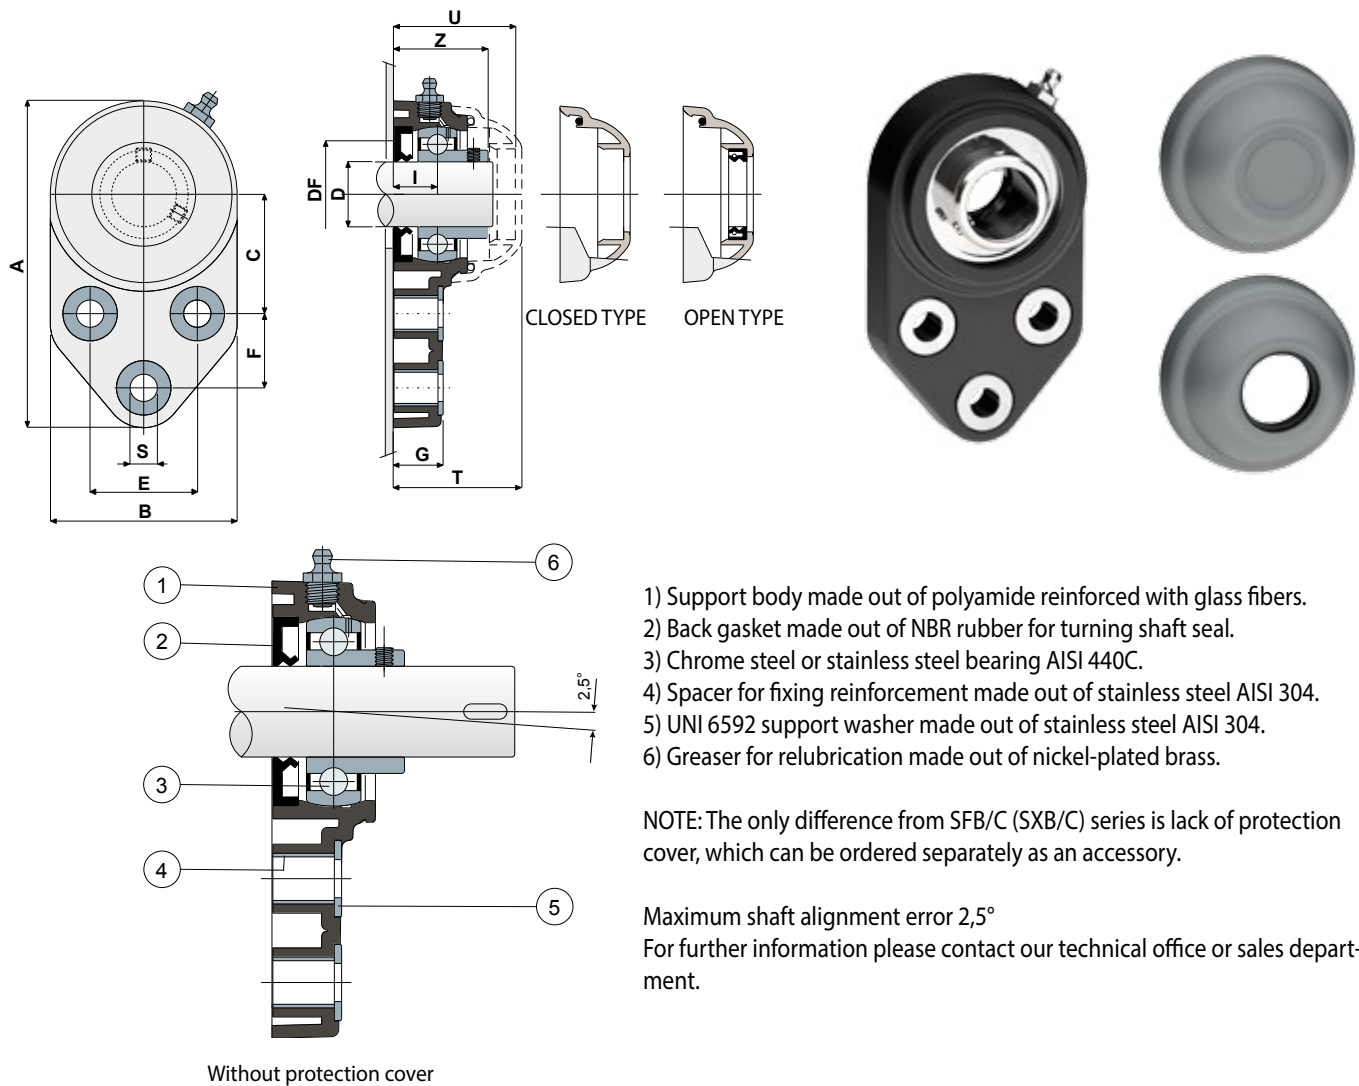

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from SFB/C (SXB/C) series is lack of protection cover, which can be ordered separately as an accessory.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																						
D	Type	Support CODES	DIMENSIONS (mm)												Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES		
			E	A	B	C	F	S	G	I	Z	U	T	DF		C	C0			(N)	Closed Code	Open Code
														Max	Min							
20	SFB/CX 204	CP000696	41,3	125	72	46	28,6	10,5	19	18	36	47	49,5	45	40	12800	6600	8500	SF 204	SF 204 A	CP002004	CP002014
25	SFB/CX 205	CP000697	41,3	125	72	46	28,6	10,5	19	17	36,5	47	49,5	50	45	14000	7800	9000	SF 205	SF 205 A	CP002005	CP002015
40	SFB/CX 208	CP000698	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	78	65	32500	19800	18000	SF 208	SF 208 A	CP002008	CP002018

STAINLESS STEEL BEARING AISI 440C																						
D	Type	Support CODES	DIMENSIONS (mm)												Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES		
			E	A	B	C	F	S	G	I	Z	U	T	DF		C	C0			(N)	Closed Cover	Open Code
														Max	Min							
20	SXB/CX 204	CP000699	41,3	125	72	46	28,6	10,5	19	18	36	47	49,5	45	40	12800	6600	8500	SF 204	SF 204 A	CP002004	CP002014
25	SXB/CX 205	CP000700	41,3	125	72	46	28,6	10,5	19	17	36,5	47	49,5	50	45	14000	7800	9000	SF 205	SF 205 A	CP002005	CP002015
40	SXB/CX 208	CP000701	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	78	65	32500	19800	18000	SF 208	SF 208 A	CP002008	CP002018

MATERIALS: Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.



FEATURES: The difference from SFB/C (SXB/C) series is lack of protection cover which can be ordered separately as an accessory.

Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; box quantity according to your request.

Side flanged bearing supports Type: SFB (SXB)

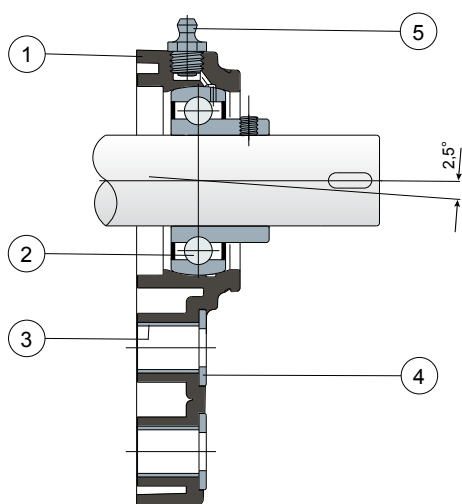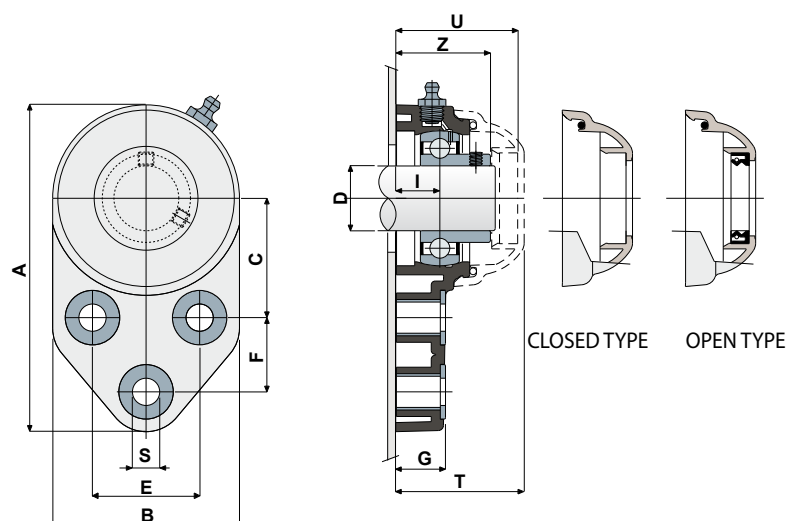

Without cover and back gasket

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Chrome steel or stainless steel bearing AISI 440C.
- 3) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 4) UNI 6592 support washer made out of stainless steel AISI 304.
- 5) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from SFB/C (SXB/C) series is lack of back gasket and protection cover, which can be ordered separately as accessories.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

CHROME STEEL BEARING																				
D	Type	CODES Support	DIMENSIONS (mm)											Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	B	C	F	S	G	I	Z	U	T	C	C0	(N)			Closed Cover	Open Cover
20	SFB 204	CP000702	41,3	125	72	46	28,6	10,5	19	18	36	47	49,5	12800	6600	8500	SF 204	SF 204 A	CP002004	CP002014
25	SFB 205	CP000703	41,3	125	72	46	28,6	10,5	19	17	36,5	47	49,5	14000	7800	9000	SF 205	SF 205 A	CP002005	CP002015
40	SFB 208	CP000704	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	32500	19800	18000	SF 208	SF 208 A	CP002008	CP002018

STAINLESS STEEL BEARING AISI 440C																				
D	Type	CODES Support	DIMENSIONS (mm)											Bearing load (N)		Support load	CLOSED Cover	OPEN Cover	COVER CODES	
			E	A	B	C	F	S	G	I	Z	U	T	C	C0	(N)			Closed Cover	Open Cover
	SXB 204	CP000705	41,3	125	72	46	28,6	10,5	19	18	36	47	49,5	12800	6600	8500	SF 204	SF 204 A	CP002004	CP002014
	SXB 205	CP000706	41,3	125	72	46	28,6	10,5	19	17	36,5	47	49,5	14000	7800	9000	SF 205	SF 205 A	CP002005	CP002015
	SXB 208	CP000707	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	32500	19800	18000	SF 208	SF 208 A	CP002008	CP002018

MATERIALS: Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: The difference from SFB/C (SXB/C) series is lack of back gasket and protection cover, which can be ordered separately as accessories. Assembly with shouldered and not shouldered shafts. Maximum shaft alignment error 2.5°.


BOX QUANTITY: 8 pieces.

ON REQUEST: Antibacterial executions and versions with polypropylene + glass fiber support; protection cover in different colours and with personalized brand; box quantity according to your request.



SUPPORT BASE		Page 06-11
SPACER AND GUIDE RAIL CLAMP		Page 12-35
KNOB FOR BRACKET AND HANDLE		Page 36-41
HINGES		Page 42
COMP. FOR CHAINS TABLETOP		Page 43-56
CONVEYOR BUSHINGS AND EXPANSION PLUGS		Page 57-59
COMPONENTS FOR DRIVE AND IDLER ROLLER		Page 60-62
TRANSFER PLATES AND CONVOYER GUIDES		Page 63-79
REDUCERS FOR RACKS		Page 80-81
POLYAMIDE SUPPORTS		Page 82-98
FIXED, ARTICULATED AND ADJUSTABLE FEET (polyamide, nickel and inox)		Page 99-119
THREADED BUSHINGS FOR TUBES Rectangular, Round and Square		Page 120-126

CONVEYOR COMPONENTS

						
D00/DX00 pag. 006	D01/DX01 pag. 006	D02/DX02 pag. 007	D03/DX03 pag. 007	D12/DX12 pag. 008	D08/DX08 pag. 008	D11/DX11 pag. 009
						
D07/DX07 pag. 009	D10/DX10 pag. 010	D35 pag. 010	D36 pag. 011	D13 pag. 012	D14 pag. 012	D79 pag. 013
						
D15 pag. 013	D80 pag. 014	D43 pag. 014	D81 pag. 015	D16/DX16 pag. 015	D18/DX18 pag. 016	D44/DX44 pag. 016
						
D17 pag. 017	D19 pag. 017	D55 pag. 018	D09 pag. 018	D20 pag. 019	D42 pag. 019	D22 pag. 020
						
D21 pag. 020	D66 pag. 021	D23/DX23 pag. 021	D24 pag. 022	D25 pag. 022	D56 pag. 022	D89 pag. 023
						
D29 pag. 023	D30 pag. 024	D31 pag. 024	D32 pag. 025	T46 pag. 025	T47 pag. 026	D91 pag. 026
						
T48 pag. 027	T49 pag. 027	D90 pag. 028	D04 pag. 028	D05 pag. 029	T01 pag. 029	T16 pag. 030
						
T02 pag. 030	T06 pag. 031	T38 pag. 031	T24 pag. 032	D37 pag. 032	D39 pag. 033	D40 pag. 033
						
D41 pag. 034	D97 pag. 035	T12 pag. 035	D26 pag. 036	D27 pag. 036	D28 pag. 036	D46 pag. 037
						
D47 pag. 037	D48 pag. 037	T13 pag. 038	T14 pag. 038	T15 pag. 038	T34 pag. 039	T37 pag. 039
						
T38 pag. 039	T03 pag. 040	T04 pag. 040	T05 pag. 040	T50 pag. 041	T32 pag. 041	D94 pag. 041



						
D33 pag. 042	D34 pag. 042	D68 pag. 043	D69 pag. 043	T11 pag. 044	D85 pag. 044	T10 pag. 045
						
D88 pag. 046	D50 pag. 047	D51 pag. 047	D52 pag. 048	D96 pag. 048	D53 pag. 049	D70 pag. 049
						
D71 pag. 050	D3 pag. 050	D74 pag. 051	D87 pag. 051	D86 pag. 052	D75 pag. 052	D72 pag. 053
						
D67 pag. 053	D49 pag. 054	D45 pag. 054	D93 pag. 055	D76 pag. 055	D54 pag. 056	D82 pag. 056
						
T36 pag. 057	T35 pag. 057	D83 pag. 058	T33 pag. 059	T00 pag. 060	D65 pag. 060	D63 pag. 061
						
T17 pag. 061	D64 pag. 062	D57 pag. 063	D58 pag. 063	D59 pag. 063	D60 pag. 064	D61 pag. 064
						
D62 pag. 064	T06 pag. 065	T07 pag. 065	T08 pag. 066	T19 pag. 066	T25 pag. 067	T26 pag. 067
						
T27 pag. 068	T28 pag. 068	T55 pag. 069	T56 pag. 069	T57 pag. 070	T58 pag. 070	T20,21,22,23 pag. 071
						
T40 pag. 071	T41 pag. 072	T42 pag. 072	T43 pag. 073	T29 pag. 073	T53 pag. 073	T54 pag. 074
						
T18 pag. 074	T39 pag. 075	T44 pag. 075	T45 pag. 076	T30/TX30 pag. 076	T59 pag. 077	T60 pag. 078
						
T52 pag. 079	T31 pag. 080	D99 pag. 081				

Support base (tripode) Type: D00 e DX00

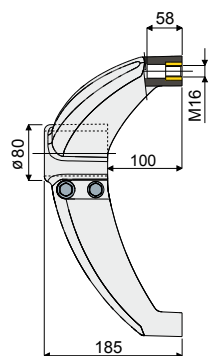

Df Bore for tubes of		Zinc plated bolts and nuts		Stainless steel AISI 304 bolts and nuts		Tube unthreading load	Max static load allowed
(mm)	(Inches)	Type	Code	Type	Code	(N)	(N)
60,3	2"	D00A	CP000001	DX00A	CP000006	9600	15800
50,8	-	D00B	CP000002	DX00B	CP000007		
48,3	1"1/2	D00C	CP000003	DX00C	CP000008		
42,4	1"1/4	D00D	CP000004	DX00D	CP000009		
45x45	tubo quadro	D00E	CP000005	DX00E	CP000010		

Support base (bipode at 120°) Type: D01 e DX01

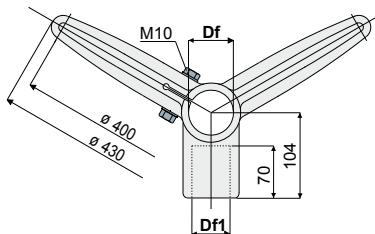

Df		Df1		Zinc plated		Stainless steel AISI 304		Tube unthreading load	Max static load allowed
Bore for tubes of		Bore for tubes of		bolts and nuts		bolts and nuts			
(mm)	(Inches)	(mm)	(Inches)	Type	Code	Type	Code	(N)	(N)
60,3	2"	48,3	1"1/2	D01A	CP000011	DX01A	CP000018	9600	15800
60,3	2"	42,4	1"1/4	D01B	CP000012	DX01B	CP000019		
50,8	-	48,3	-	D01C	CP000013	DX01C	CP000020		
50,8	-	42,4	-	D01D	CP000014	DX01D	CP000021		
48,3	1"1/2	48,3	1"1/2	D01E	CP000015	DX01E	CP000022		
48,3	1"1/2	42,4	1"1/4	D01F	CP000016	DX01F	CP000023		
42,4	1"1/4	42,4	1"1/4	D01G	CP000017	DX01G	CP000024		

MATERIALS: Base made of reinforced polyamide black colour; threaded bushing made of brass; fixing bolts and nuts made of stainless steel AISI 304 or zinc plated steel.


FEATURES: Max tightening torque 3,6 Kg.m.

BOX QUANTITY: 8 pieces.

ON REQUEST:


- Bases: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.
- Assembling of: Bolts and nuts.

Support base (bipode at 180°) Type: D02 e DX02

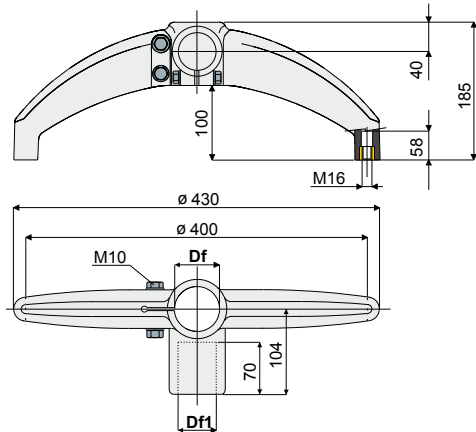

Df Bore for tubes of		Df1 Bore for tubes of		Zinc plated bolts and nuts		Stainless steel AISI 304 bolts and nuts		Tube unthreading load	Max static load allowed
(mm)	(Inches)	(mm)	(Inches)	Type	Code	Type	Code	(N)	(N)
60,3	2"	48,3	1"1/2	D02A	CP000025	DX02A	CP000032	9600	15800
60,3	2"	42,4	1"1/4	D02B	CP000026	DX02B	CP000033		
50,8	-	48,3	-	D02C	CP000027	DX02C	CP000034		
50,8	-	42,4	-	D02D	CP000028	DX02D	CP000035		
48,3	1"1/2	48,3	1"1/2	D02E	CP000029	DX02E	CP000036		
48,3	1"1/2	42,4	1"1/4	D02F	CP000030	DX02F	CP000037		
42,4	1"1/4	42,4	1"1/4	D02G	CP000031	DX02G	CP000038		

Support base (bipode at 180°) Type: D03 e DX03

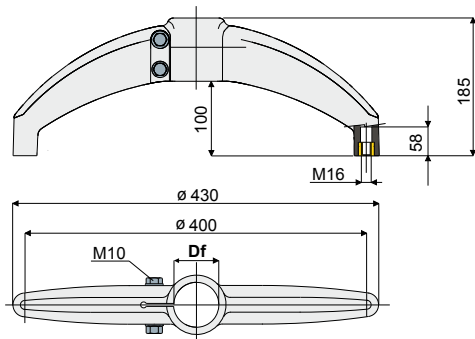

Df Bore for tubes of		Zinc plated bolts and nuts		Stainless steel AISI 304 bolts and nuts		Tube unthreading load	Max static load allowed
(mm)	(Inches)	Type	Code	Type	Code	(N)	(N)
60,3	2"	D03A	CP000039	DX03A	CP000043	9600	15800
50,8	-	D03B	CP000040	DX03B	CP000044		
48,3	1"1/2	D03C	CP000041	DX03C	CP000045		
42,4	1"1/4	D03D	CP000042	DX03D	CP000046		

MATERIALS: Base made of reinforced polyamide black colour; threaded bushing made of brass; fixing bolts and nuts made of stainless steel AISI 304 or zinc plated steel.


FEATURES: Max tightening torque 3,6 Kg-m.

BOX QUANTITY: 8 pieces.

ON REQUEST:


- Bases: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.
- Assembling of: Bolts and nuts.

Bearing head Type: D12 e DX12

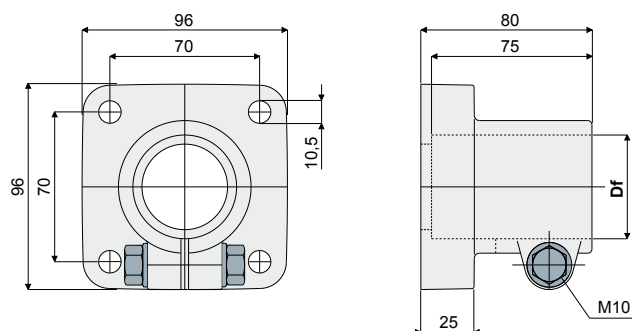

Df Bore for tubes of		Zinc plated bolts and nuts		Stainless steel AISI 304 bolts and nuts	
(mm)	(Inches)	Type	Code	Type	Code
48,3	1"1/2	D12A	CP000047	DX12A	CP000049
50,8	-	D12B	CP000048	DX12B	CP000050

Bearing head Type: D08 e DX08

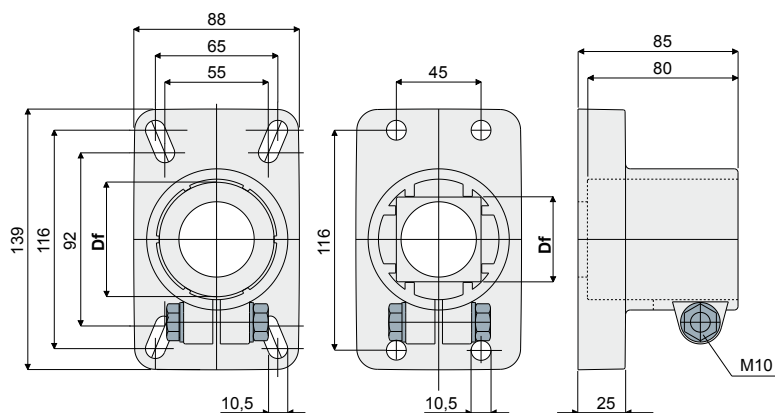

Df Bore for tubes of		Zinc plated bolts and nuts		Stainless steel AISI 304 bolts and nuts	
(mm)	(Inches)	Type	Code	Type	Code
60,3	2"	D08A	CP000051	DX08A	CP000056
50,8	-	D08B	CP000052	DX08B	CP000057
48,3	1"1/2	D08C	CP000053	DX08C	CP000058
42,4	1"1/4	D08D	CP000054	DX08D	CP000059
45x45	tubo quadro	D08E	CP000055	DX08E	CP000060

MATÉRIAUX: Tête en polyamide renforcé couleur noir; boulons de serrage en acier inox AISI 304 ou acier zingué.


CARACTÉRISTIQUES: Couple maximal de serrage 3,6 Kg·m.

CONDITIONNEMENT: 8 pièces.

SUR DEMANDE:


- Têtes: En polypropylène renforcé, dans différentes couleurs.
- Conditionnement: Hors standard.
- Assemblage de: vis, écrous et rondelles.

Side mounting top bracket Type: D11 e DX11

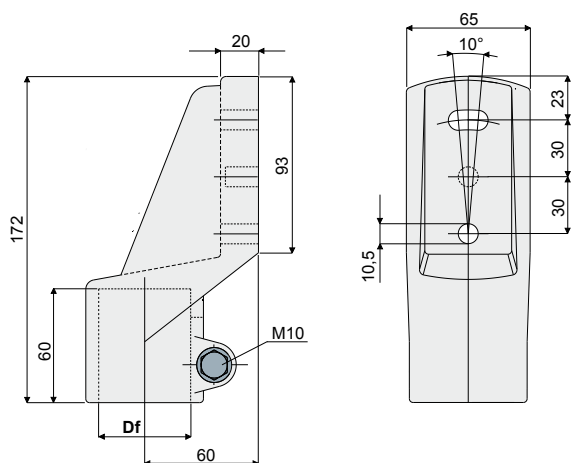

Df Bore for tubes of		Zinc plated bolts and nuts		Stainless steel AISI 304 bolts and nuts	
(mm)	(Inches)	Type	Code	Type	Code
48,3	1 1/2	D11	CP000061	DX11	CP000062

Side mounting top bracket Type: D07 e DX07

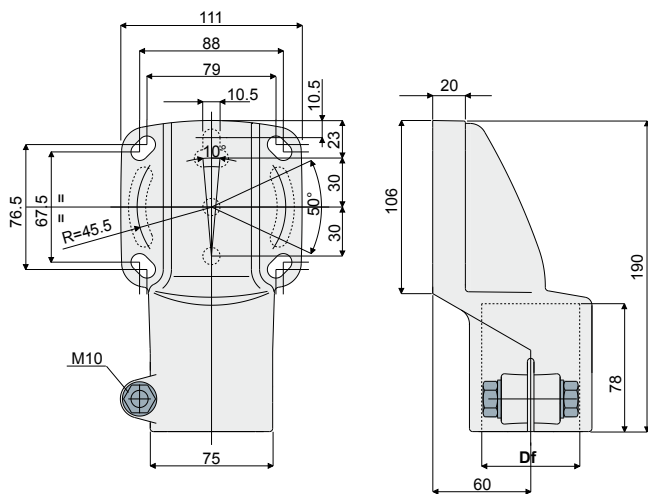

Df Bore for tubes of		Zinc plated bolts and nuts		Stainless steel AISI 304 bolts and nuts	
(mm)	(Inches)	Type	Code	Type	Code
60,3	2"	D07A	CP000063	DX07A	CP000069
50,8	-	D07B	CP000064	DX07B	CP000070
48,3	1 1/2	D07C	CP000065	DX07C	CP000071
42,4	1 1/4	D07D	CP000066	DX07D	CP000072
45x45	square tube	D07E	CP000067	DX07E	CP000073
48,3	trou	D07F	CP000068	DX07T	CP000074

MATERIALS: Top bracket made out of reinforced polyamide black colour; bolts and nuts made out of stainless steel AISI 304 or zinc plated steel.


FEATURES: Max tightening torque 3,6 Kg-m.

BOX QUANTITY: 8 pieces.

ON REQUEST:

- Top brackets: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.
- Assembling of: Bolts and nuts.gg

Connection joint Type: D10 e DX10

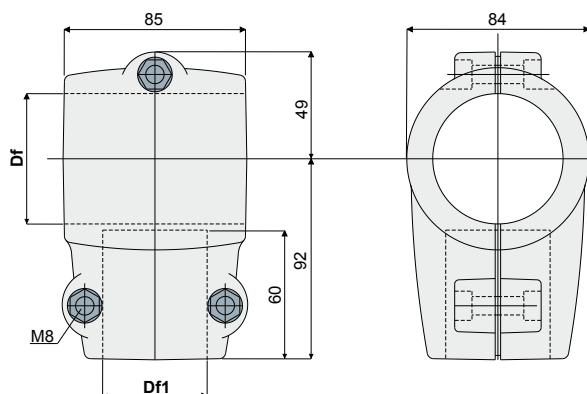

Df		Df1		Zinc plated bolts and nuts		Stainless steel AISI 304 bolts and nuts	
Bore for tubes of		Bore for tubes of		Type	Code	Type	Code
(mm)	(Inches)	(mm)	(Inches)				
60,3	2"	48,3	1"1/2	D10A	CP000075	DX10A	CP000075
60,3	2"	42,4	1"1/4	D10B	CP000076	DX10B	CP000076
48,3	1"1/2	48,3	1"1/2	D10C	CP000077	DX10C	CP000077
48,3	1"1/2	42,4	1"1/4	D10D	CP000078	DX10D	CP000078
42,4	1"1/4	42,4	1"1/4	D10E	CP000079	DX10E	CP000079

MATERIALS: Joint made of reinforced polyamide black colour; bolts and nuts made of stainless steel AISI 304 or zinc plated steel.


FEATURES: Max tightening torque 2 Kg-m.

BOX QUANTITY: 8 pieces.

ON REQUEST:

- Joints: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.
- Assembling of: Bolts and nuts.

Mounting plate (for drip tray support) Type: D35

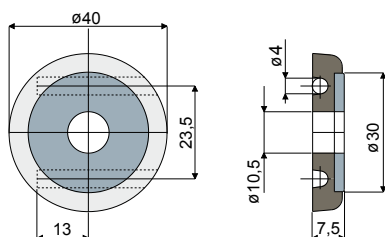

Type	Code
D35	CP000085

MATERIALS: Plate made of reinforced polyamide black colour; washer made of stainless steel AISI 304.



FEATURES: For application on conveyor side to fasten drip tray support.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Box Quantity: According to your request.

Drip tray support Type: D36

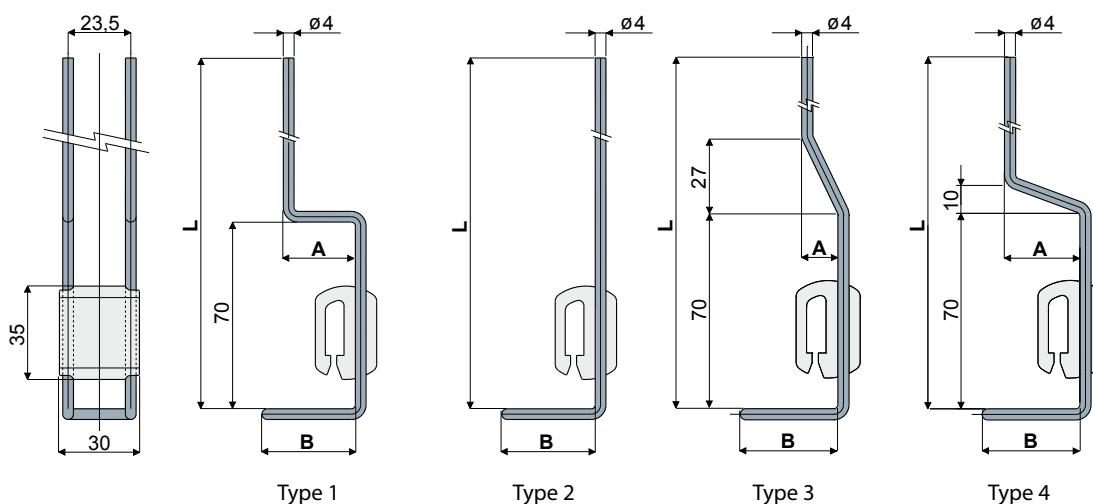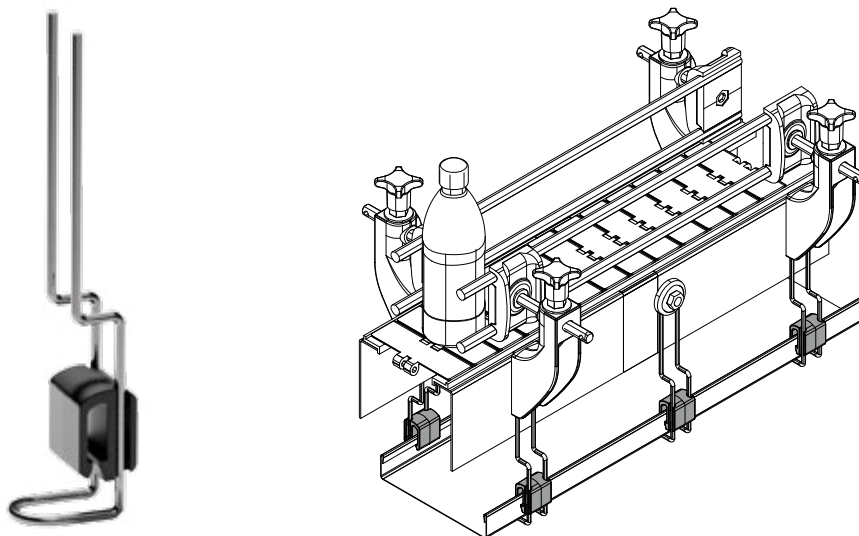

Type 1				
L	B	A	Type	Code
(mm)	(mm)	(mm)		
180	35	27	D36A	CP000086
180	35	17	D36B	CP000087
230	35	27	D36C	CP000088

Type 2			
L	B	Type	Code
(mm)	(mm)		
200	35	D36D	CP000089
246	35	D36E	CP000090

Type 3				
L	B	A	Type	Code
(mm)	(mm)	(mm)		
250	35	13	D36F	CP000091

Type 4				
L	B	A	Type	Code
(mm)	(mm)	(mm)		
280	35	27	D36G	CP000092

MATERIALS: Support elements made of stainless steel AISI 304; body of coupling made of reinforced polyamide black colour.


FEATURES: To be used to support drip trays.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Drip tray supports: Supplied in different shapes and sizes.
- Box Quantity: According to your request.


Guide rail bracket Type: D13

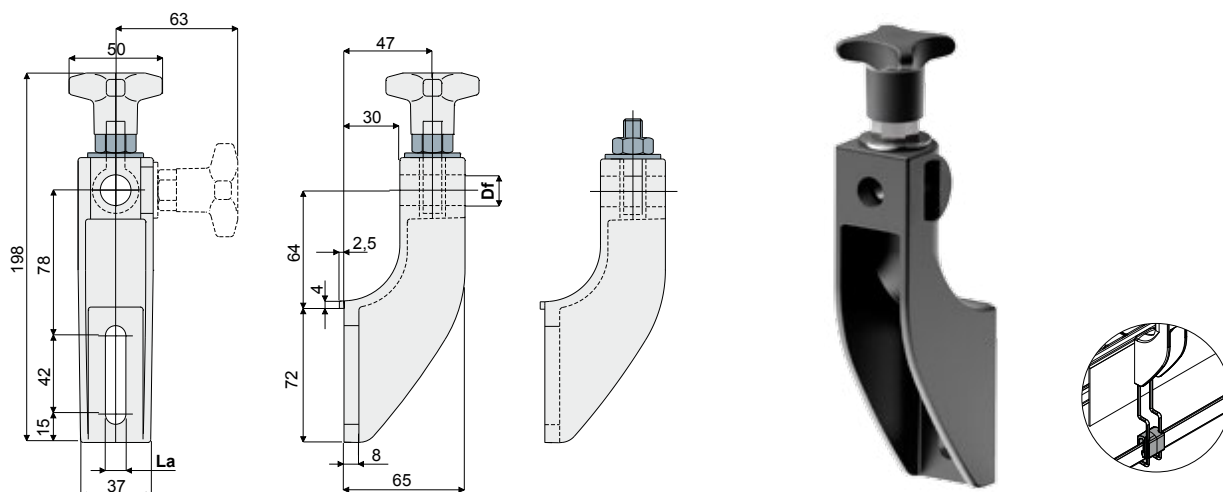

La (9 mm slot)				
Df	With knob		With nut	
Bore for pin of (mm)	Type	Code	Type	Code
12	D13A	CP000093	D13D	CP000096
14	D13B	CP000094	D13E	CP000097
16	D13C	CP000095	D13F	CP000098

La (11 mm slot)				
Df	With knob		With nut	
Bore for pin of (mm)	Type	Code	Type	Code
12	D13G	CP000099	D13L	CP000102
14	D13H	CP000100	D13M	CP000103
16	D13I	CP000101	D13N	CP000104

Guide rail bracket (with adjustable head) Type: D14

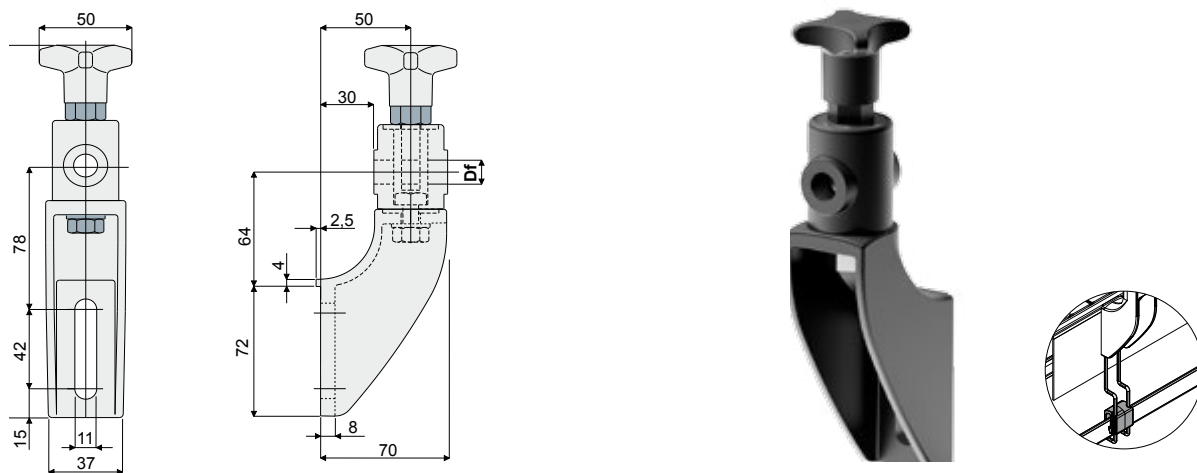

Df	Type	Code
Bore for pin of (mm)		
12	D14A	CP000105
14	D14B	CP000106
16	D14C	CP000107

MATERIALS: Bracket and knob made of reinforced polyamide black colour; hexagonal insert made of nickel plated brass; eyebolt, nut and washer made of stainless steel AISI 304.



FEATURES: Max tightening torque 4 Kg-m.

BOX QUANTITY: 24 pieces.

ON REQUEST:



- Brackets: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Guide rail bracket (with adjustable head) Type: D79

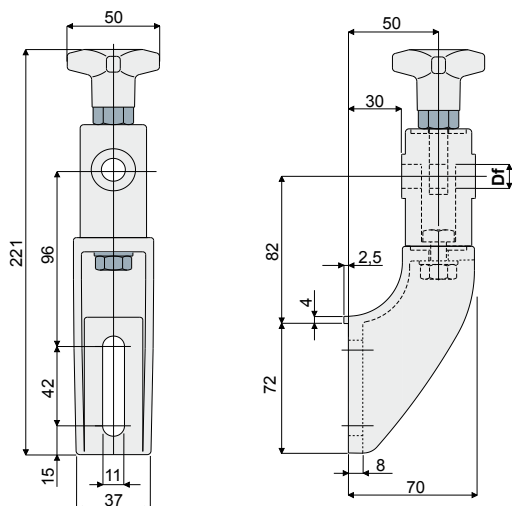

Df Bore for pin of (mm)	Type	Code
12	D79A	CP000108
14	D79B	CP000109
16	D79C	CP000110

Guide rail bracket (with adjustable head) Type: D15

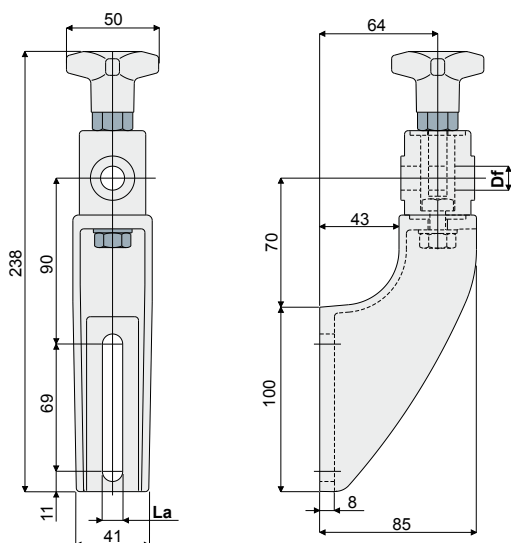

Df Bore for pin of (mm)	La (9 mm slot)		La (11 mm slot)	
	Type	Code	Type	Code
12	D15A	CP000111	D15D	CP000114
14	D15B	CP000112	D15E	CP000115
16	D15C	CP000113	D15F	CP000116

MATERIALS: Bracket and knob made of reinforced polyamide black colour; hexagonal insert made of nickel plated brass; eyebolt, nut and washer made of stainless steel AISI 304.



FEATURES: Max tightening torque 4 Kg-m.

BOX QUANTITY: 24 pieces.

ON REQUEST:



- Brackets: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Guide rail bracket (with adjustable high type head) Type: D80

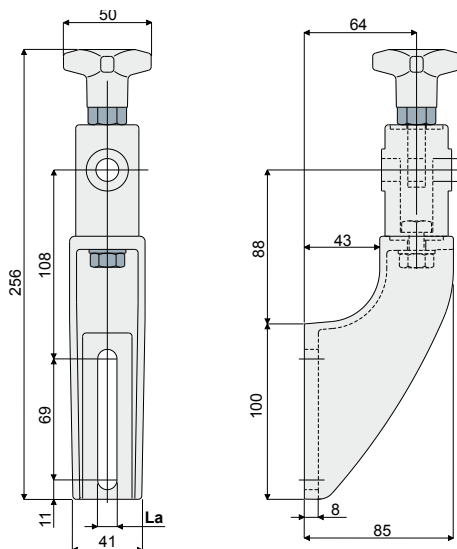

Df Bore for pin of (mm)	La (9 mm slot)		La (11 mm slot)	
	Type	Code	Type	Code
12	D80A	CP000117	D80D	CP000120
14	D80B	CP000118	D80E	CP000121
16	D80C	CP000119	D80F	CP000122

Guide rail bracket (reinforced type with adjustable head) Type: D43

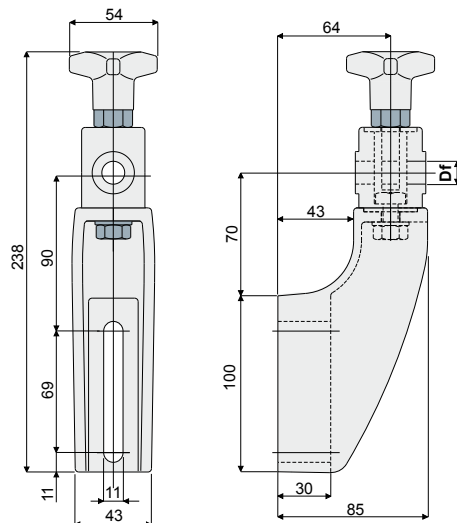

Df Bore for pin of (mm)	Type	Code
12	D43A	CP000123
14	D43B	CP000124
16	D43C	CP000125

MATERIALS: Bracket and knob made of reinforced polyamide black colour; hexagonal insert made of nickel plated brass; eyebolt, screw, nut and washer made of stainless steel AISI 304.



FEATURES: D43 is used for heavy applications, suitable in conveyors with more ways, both in accumulation and curve. D43 and D80 have max tightening torque of 4 Kg-m.

BOX QUANTITY: 24 pieces.

ON REQUEST:



- Brackets: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Guide rail bracket (reinforced type with adjustable high type head) Type: D81

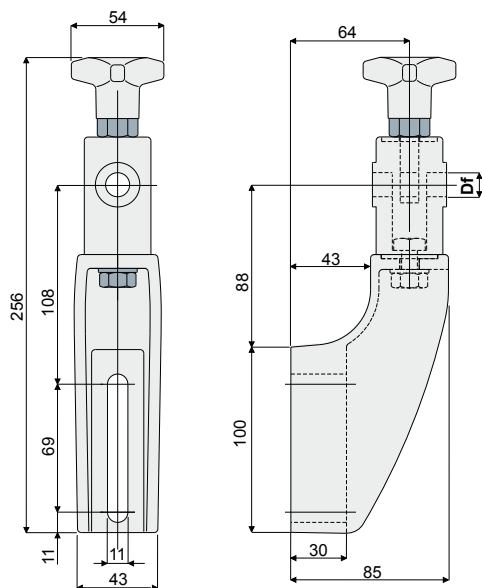

Df Bore for pin of (mm)	Type	Code
12	D81A	CP000126
14	D81B	CP000127
16	D81C	CP000128

Guide rail bracket (with metal adjustable head) Type: D16 e DX16

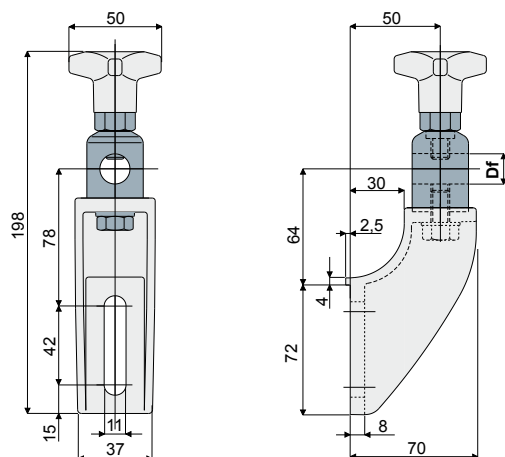

Df Bore for pin of (mm)	Head made out of nickel plated brass	Head made out of stainless steel AISI 304
14 - 16	Type D16 Code CP000129	Type DX16 Code CP000130

MATERIALS: Bracket and knob made out of reinforced polyamide black colour; head made out of stainless steel AISI 304 or nickel plated brass; hexagonal insert made out of nickel plated brass; screw and washer made out of stainless steel AISI 304.



FEATURES: Possibility to use pins with diameter 14 and 16 mm. Max tightening torque 4 Kg-m.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Brackets: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.



Guide rail bracket (with metal adjustable head) Type: D18 e DX18

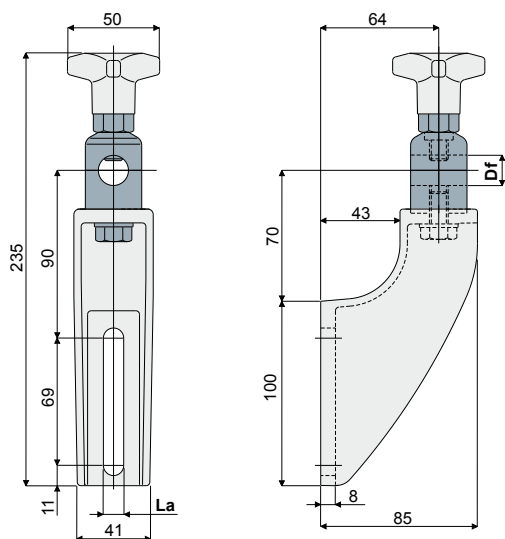

Df Bore for pin of (mm)	La (9 mm slot)		La (11 mm slot)	
	Head made out of nickel plated brass		Head made out of stainless steel AISI 304	
	Type	Code	Type	Code
14 - 16	D18A	CP000131	DX18A	CP000132

Df Bore for pin of (mm)	La (11 mm slot)		La (11 mm slot)	
	Head made out of nickel plated brass		Head made out of stainless steel AISI 304	
	Type	Code	Type	Code
14 - 16	D18B	CP000133	DX18B	CP000134

Guide rail bracket (reinforced type with metal adjustable head) Type: D44

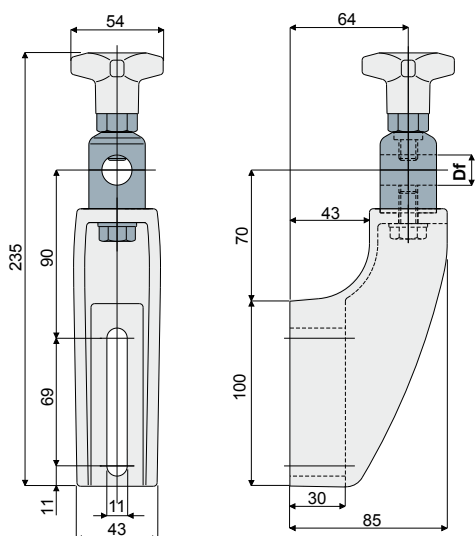

Df Bore for pin of (mm)	Head made out of nickel plated brass		Head made out of stainless steel AISI 304	
	Type	Code	Type	Code
	Type	Code	Type	Code
14 - 16	D44	CP000135	DX44	CP000136

MATERIALS: Bracket and knob made out of reinforced polyamide black colour; head made out of stainless steel AISI 304 or nickel plated brass; hexagonal insert made out of nickel plated brass; screw and washer made out of stainless steel AISI 304.



FEATURES: Possibility to use pins with diameter 14 and 16 mm. Max tightening torque 4 Kg·m. D44 is used for heavy applications, suitable in conveyors with more ways, both in accumulation and curve

BOX QUANTITY: 24 pieces.

ON REQUEST:



- Brackets: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Guide rail bracket (with adjustable head) Type: D17

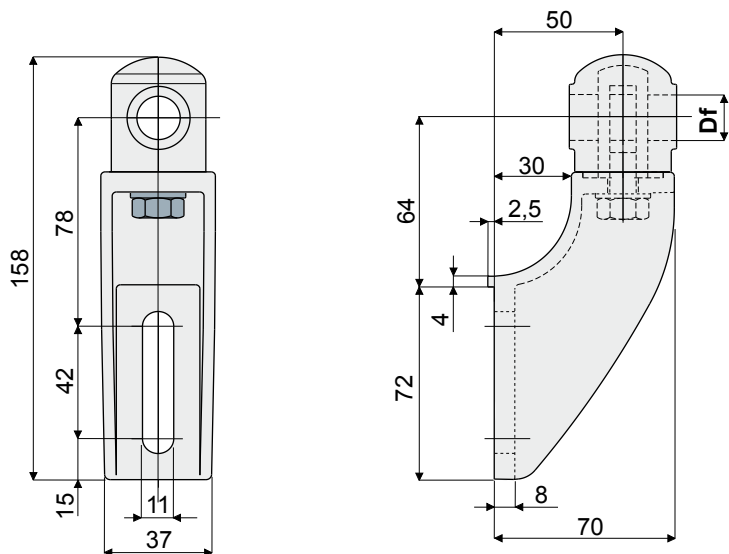

Df Bore for pin of (mm)	Type	Code
12	D17A	CP000137
14	D17B	CP000138
16	D17C	CP000139

Guide rail bracket (with adjustable head) Type: D19

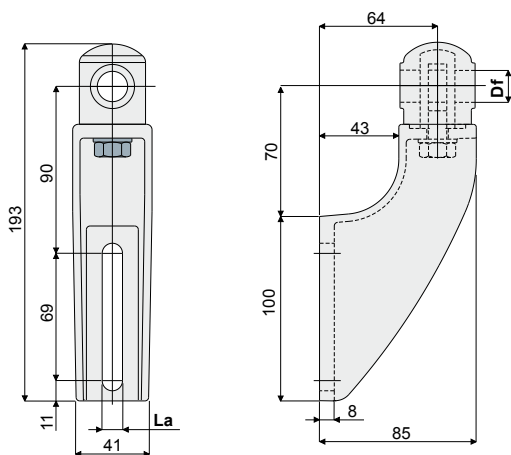

Df Bore for pin of (mm)	La (9 mm slot)		La (11 mm slot)	
	Type	Code	Type	Code
12	D19A	CP000140	D19D	CP000143
14	D19B	CP000141	D19E	CP000144
16	D19C	CP000142	D19F	CP000145

MATERIALS: Bracket and head made of reinforced polyamide black colour; eyebolt, nut and washer made of stainless steel AISI 304.



FEATURES: Max tightening torque 4 Kg·m.

BOX QUANTITY: 24 pieces.

ON REQUEST:



- Brackets: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Guide rail bracket (reinforced type with adjustable head) Type: D55

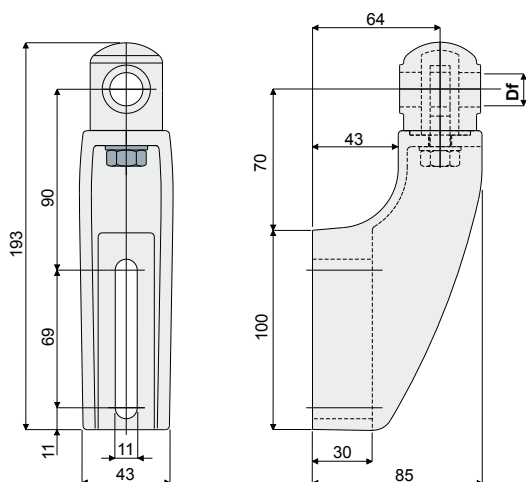

Df Bore for pin of (mm)	Type	Code
12	D55A	CP000146
14	D55B	CP000147
16	D55C	CP000148

Guide rail bracket (with adjustable head) Type: D09

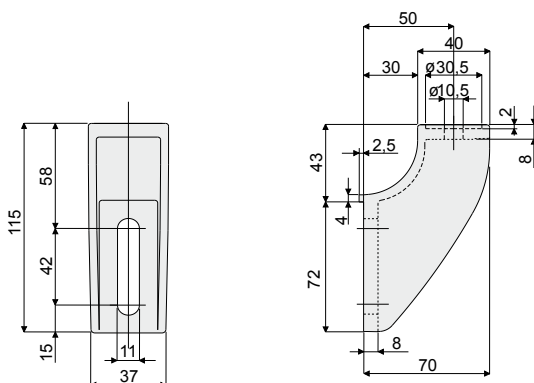

Type	Code
D09	CP000149

MATERIALS: Bracket and head made of reinforced polyamide black colour; eyebolt, nut and washer made of stainless steel AISI 304.



FEATURES: Max tightening torque 4 Kg-m. D55 is used for heavy applications, suitable in conveyors with more ways, both in accumulation and curve. D09 is used with heads D21, D22, D23 and D66.

BOX QUANTITY: 24 pieces.

ON REQUEST:



- Brackets: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Guide rail bracket (with adjustable head) Type: D20

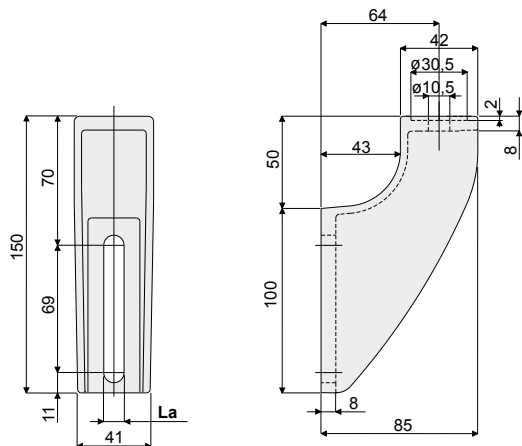

La (9 mm slot)		La (11 mm slot)	
Type	Code	Type	Code
D20A	CP000150	D20B	CP000151

Guide rail bracket (reinforced type with adjustable head) Type: D42

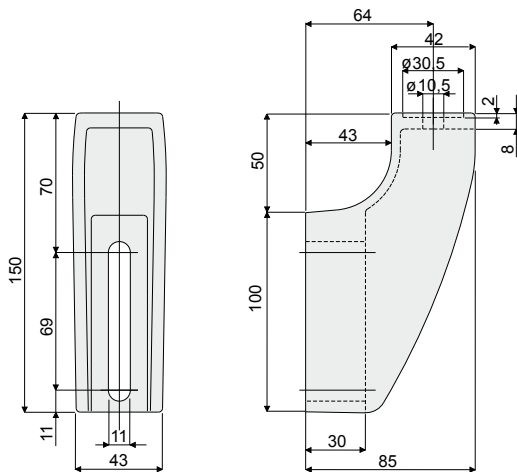

Type	Code
D42	CP000152

MATERIALS: Bracket made of reinforced polyamide black colour.

FEATURES: Each type are used with heads D21, D22, D23 and D66 for heavy applications.


D42 is suitable in conveyors with more ways, both in accumulation and curve.

BOX QUANTITY: 24 pieces.

ON REQUEST:


- Brackets: In reinforced polypropylene, other colours.

Head for bracket Type: D22

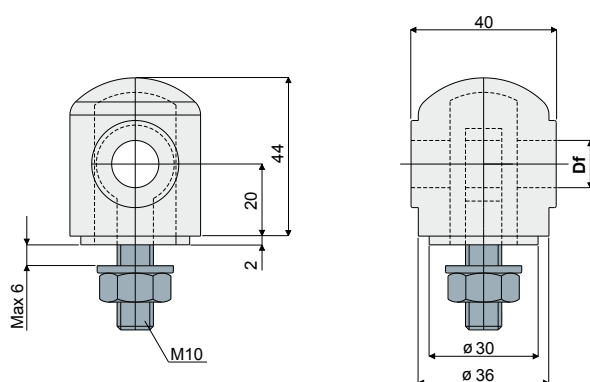

Df Bore for pin of (mm)	Type	Code
12	D22A	CP000153
14	D22B	CP000154
16	D22C	CP000155

Head for bracket Type: D21

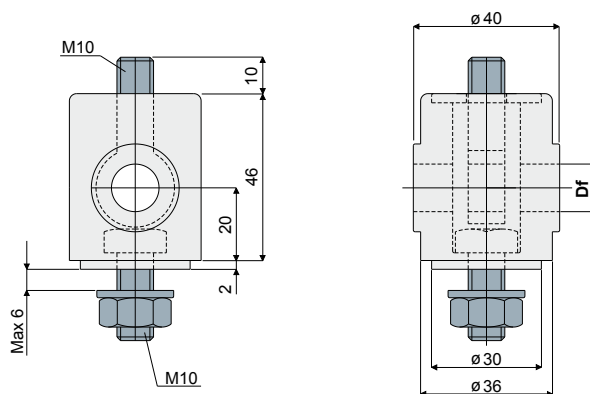

Df Bore for pin of (mm)	Type	Code
12	D21A	CP000156
14	D21B	CP000157
16	D21C	CP000158

MATERIALS: Head made of reinforced polyamide black colour; eyebolt, nut and washer made of stainless steel AISI 304.



FEATURES: Each parts are used with bracket D09, D20 and D42. Max tightening torque 4 Kg·m.

BOX QUANTITY: 24 pieces.

ON REQUEST:



- Heads: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Head for bracket (high type) Type: D66

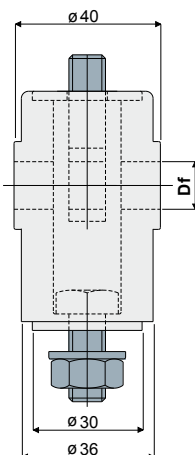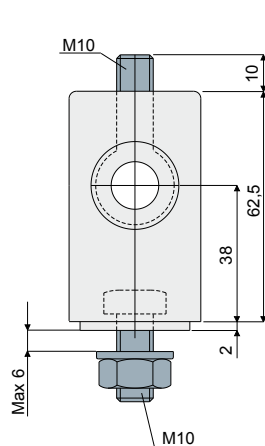

Df Bore for pin of (mm)	Type	Code
12	D66A	CP000159
14	D66B	CP000160
16	D66C	CP000161

Head for bracket (metal) Type: D23 e DX23

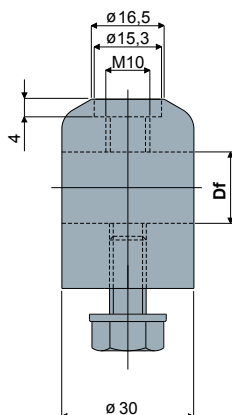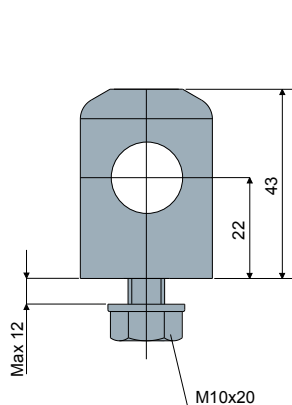

Df Bore for pin of (mm)	Head made out of nickel plated brass		Head made out of stainless steel AISI 304	
	Type	Code	Type	Code
14 - 16	D23	CP000162	DX23	CP000163

MATERIALS: Head made of reinforced polyamide black colour; eyebolt, nuts and washer made of stainless steel AISI 304.

FEATURES: The two heads are used with bracket D09, D20 and D42. Max tightening torque 4 Kg-m.


N.B.: With D23 there is the possibility to use pins with diameter 14 and 16 mm.

BOX QUANTITY: 24 pieces.

ON REQUEST:



- Heads: Made of reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Spacer for bracket Type: D24

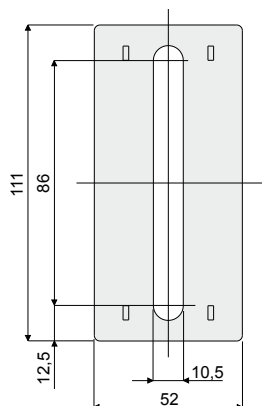




Type	Code
D24	CP000164

Spacer for bracket Type: D25

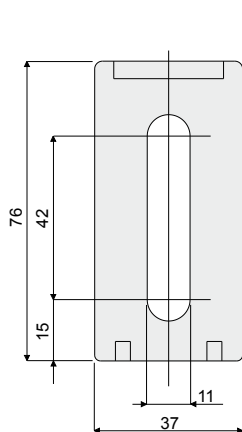

Type	Code
D25	CP000165

Spacer for heads Type: D56

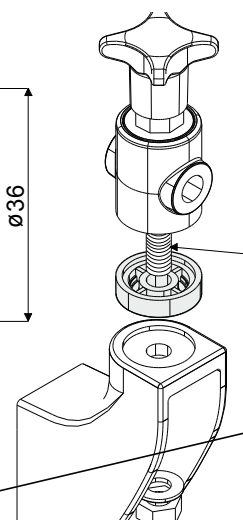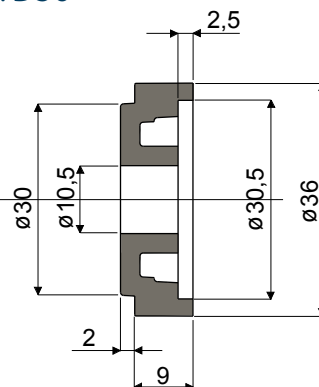

Type	Code
D56	CP000166

N.B.: To use the spacer, it is necessary to change the standard screw with a longer one.

MATERIALS: Spacer made of reinforced polyamide black colour.


FEATURES: Accessory to be used on brackets D14, D15, D16, D17, D19, D55, D09, D20, D42, D18, D43, D44, D79, D80, D81 to increase heads height. D24 is used with brackets D15, D18, D19, D20, D42, D43, D44, D55, D80, D81 and D25 is used with D13, D14, D16, D17, D09 and D79.

BOX QUANTITY: 24 pieces.

ON REQUEST:


- Spacers: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Guide rail clamp (for rectangular rails) Type: D89

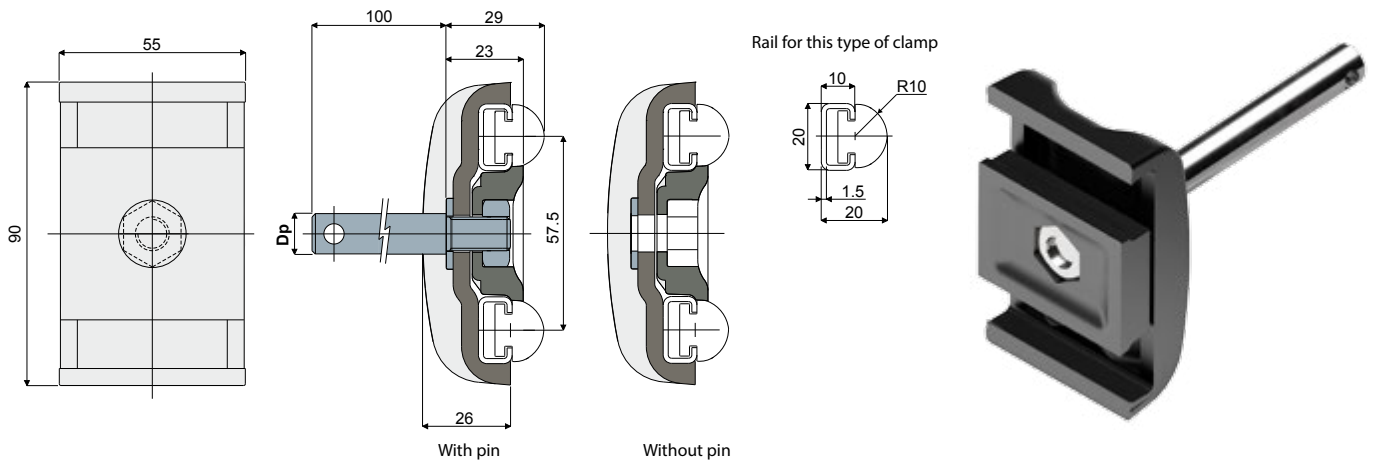

Dp Pin diameter (mm)	With pin		Without pin	
	Type	Code	Type	Code
12	D89A	CP000167		
14	D89B	CP000168	D89D	CP000170
16	D89C	CP000169		

Guide rail clamp (for round rails) Type: D29

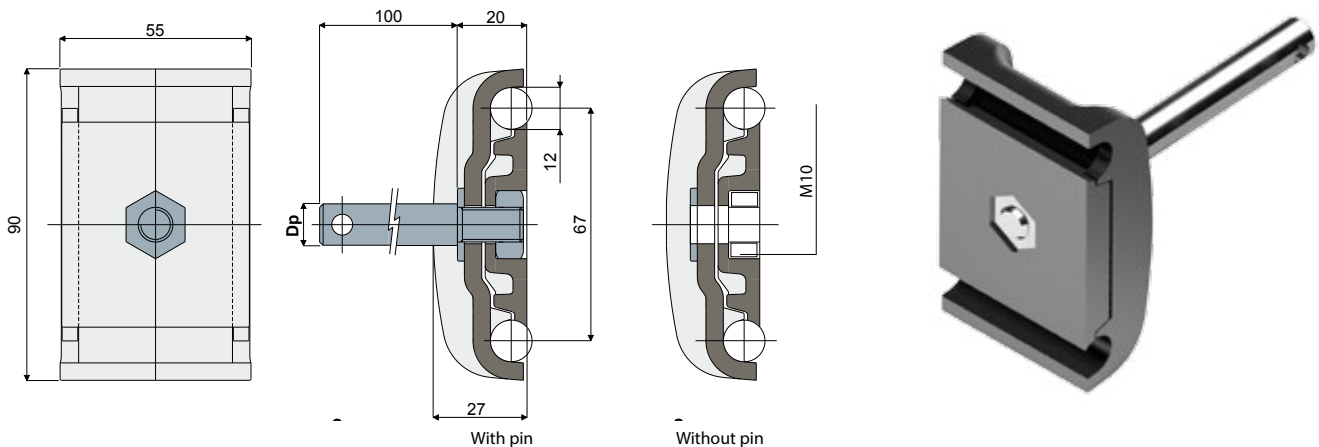

Dp Pin diameter (mm)	With pin		Without pin	
	Type	Code	Type	Code
12	D29A	CP000171		
14	D29B	CP000172	D29D	CP000174
16	D29C	CP000173		

MATERIALS: Clamp made of reinforced polyamide black colour; pin, nut and washer made of stainless steel AISI 304.


FEATURES: Supplied with or without support pin.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Clamps: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Guide rail clamp (for trapezoidal rails) Type: D30

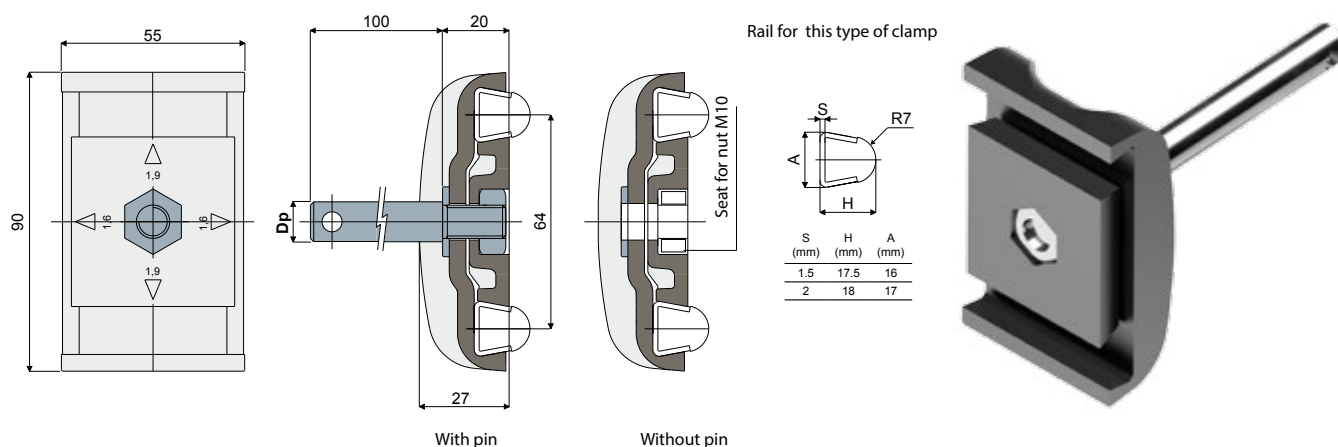

Dp Pin diameter (mm)	With pin		Without pin	
	Type	Code	Type	Code
12	D30A	CP000175		
14	D30B	CP000176	D30D	CP000178
16	D30C	CP000177		

MATERIALS: Clamp made of reinforced polyamide black colour; pin, nut and washer made of stainless steel AISI 304.


FEATURES: Supplied with or without support pin. This part can be used with rails with thickness of 1,5 and 2 mm, by rotating for 90° the central plate.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Clamps: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Guide rail clamp (for round rails) Type: D31

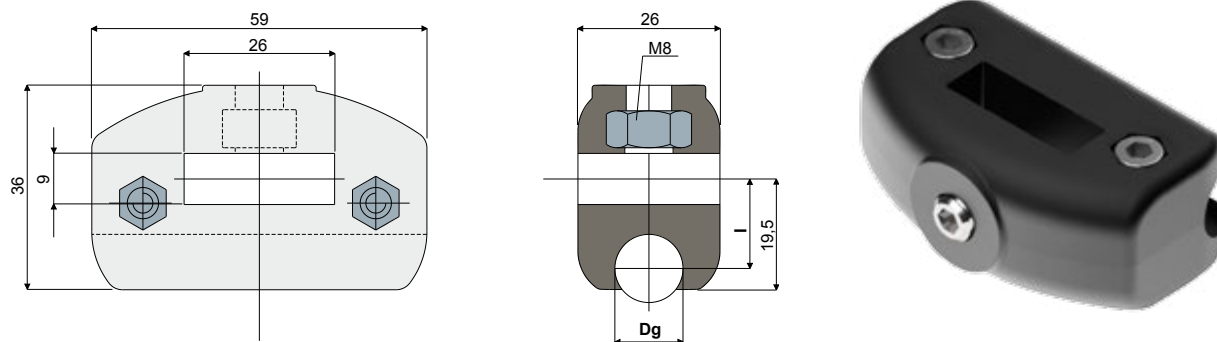

Dg Rail diameter (mm)	l (mm)	Type	Code
8	16	D31A	CP000179
10	15	D31B	CP000180
12	15	D31C	CP000181
14	15	D31D	CP000182

MATERIALS: Clamp made of reinforced polyamide black colour; screws and nuts made of stainless steel AISI 304.


FEATURES: Supplied assembled. To be used with flat support with sizes 25x8 mm.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Clamps: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Guide rail clamp (for trapezoidal rails) Type: D32

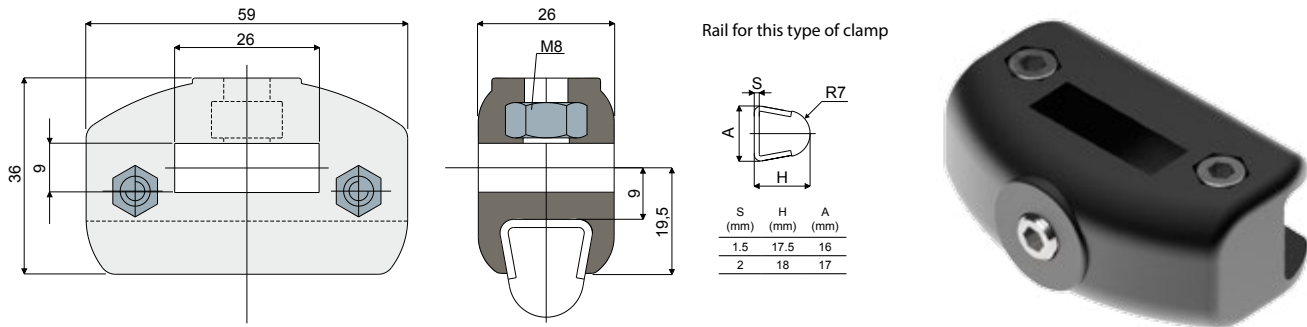

Type	Code
D32	CP000183

MATERIALS: Clamp made of reinforced polyamide black colour; screws and nuts made of stainless steel AISI 304.


FEATURES: Supplied assembled. To be used with flat support with sizes 25x8 mm. This part can be used with rails with thickness of 1,5 and 2 mm.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Clamps: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Guide rail clamp (for round rails) Type: T46

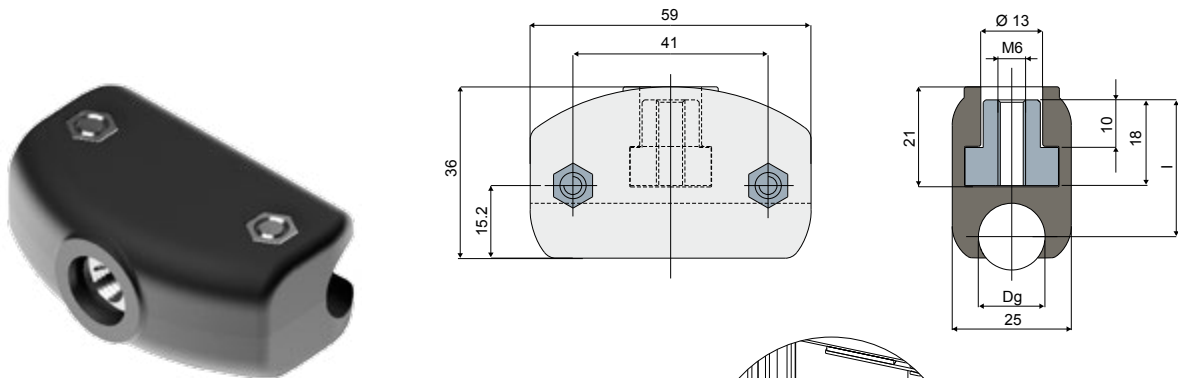

Dg Rail diameter (mm)	l (mm)	Type	Code
8	30	T46A	CP000184
10	29.5	T46B	CP000185
12	29.5	T46C	CP000186
14	28.7	T46D	CP000187


MATERIALS: Clamp made of reinforced polyamide black colour; threaded insert in nickel plated brass; bolts and nuts in stainless steel AISI 304.

FEATURES: Designed appositely to be assembled directly on the pneumatic cylinder for the rails regulation. Supplied assembled.

BOX QUANTITY: 24 pieces.


ON REQUEST:

- Clamps: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

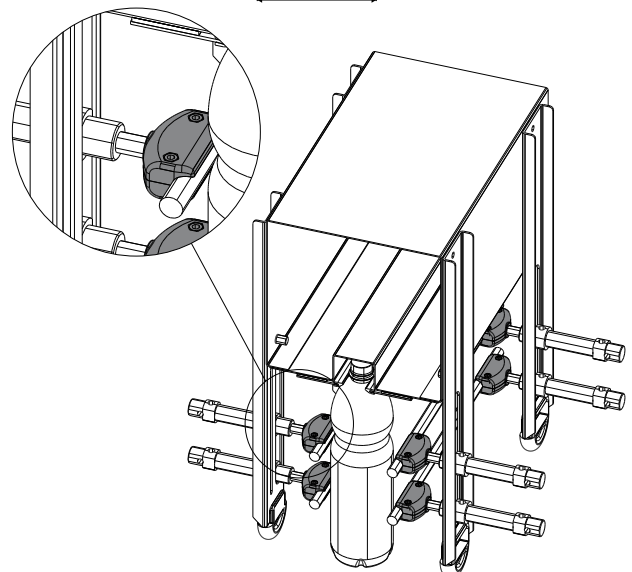

Example of application

Guide rail clamp (for rectangular rails) Type: D91

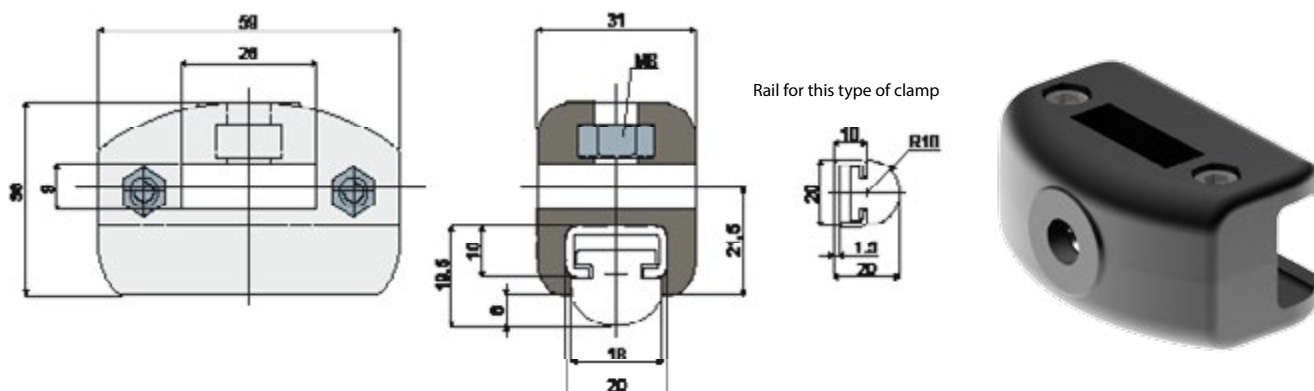

Type	Code
D91	CP000188

MATERIALS: Clamp made of reinforced polyamide black colour; screws and nuts made of stainless steel AISI 304.


FEATURES: Supplied assembled. To be used with flat profile with sizes 25x8 mm.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Clamps: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Guide rail clamp (for trapezoidal rails) Type: T47

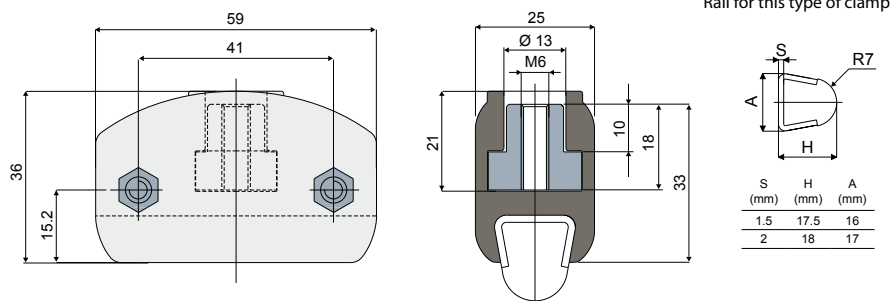

Type	Code
T47	CP000189


MATERIALS: Clamp made of reinforced polyamide black colour; threaded insert in nickel plated brass; bolts and nuts in stainless steel AISI 304.

FEATURES: designed appositely to be assembled directly on the pneumatic cylinder for the rails regulation. Supplied assembled.

BOX QUANTITY: 24 pieces.



ON REQUEST:

- Clamps: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

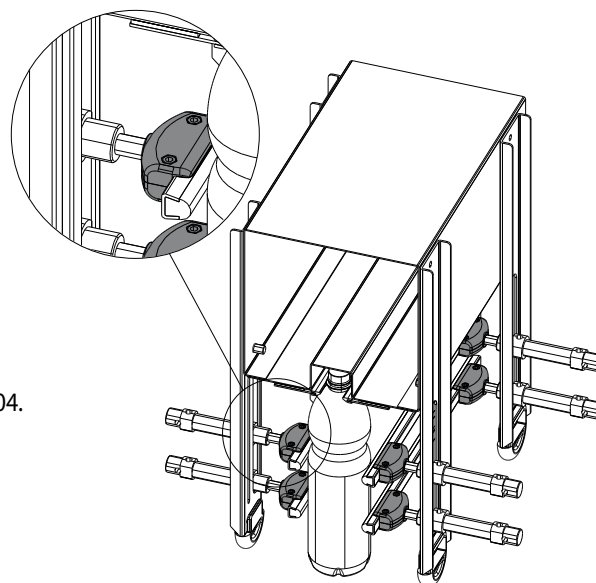

Example of application



Guide rail clamp (for round rails) Type: T48

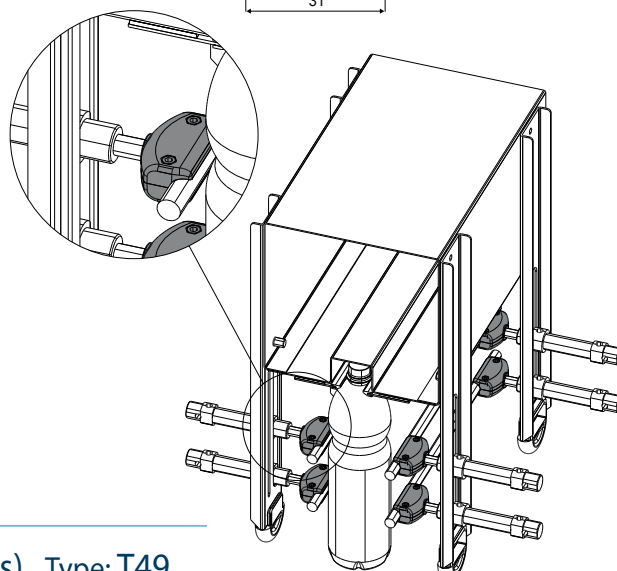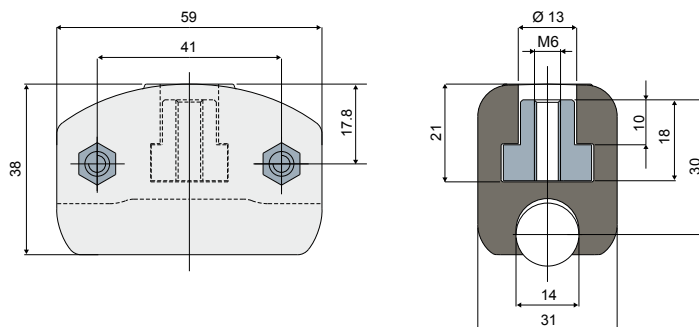

Example of application

Type	Code
T48	CP000190

Guide rail clamp (for rectangular rails) Type: T49

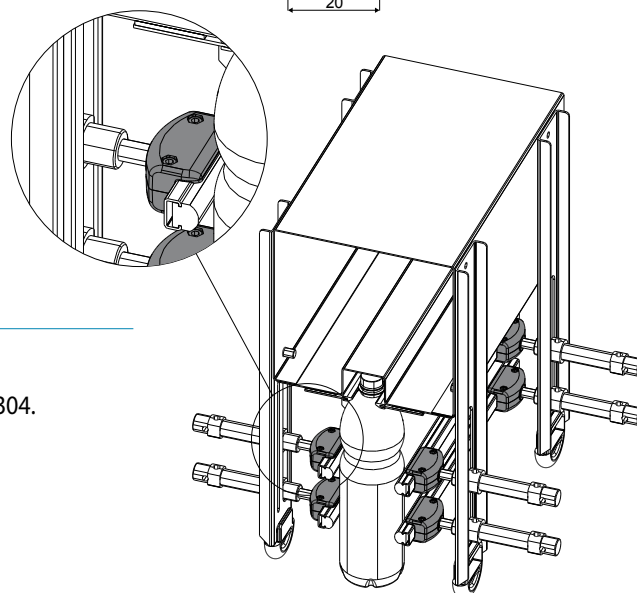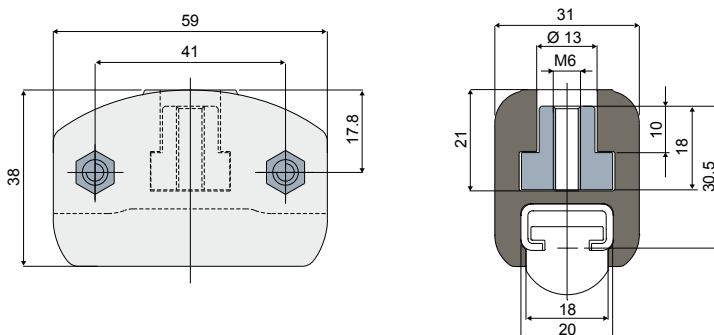

Example of application

Type	Code
T49	CP000191

MATERIALS: Clamp made of reinforced polyamide black colour; threaded insert in nickel plated brass; bolts and nuts in stainless steel AISI 304.


FEATURES: Designed appositely to be assembled directly on the pneumatic cylinder for the rails regulation. Supplied assembled.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Clamps: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.


Guide rail clamp (for rectangular rail) Type: D90

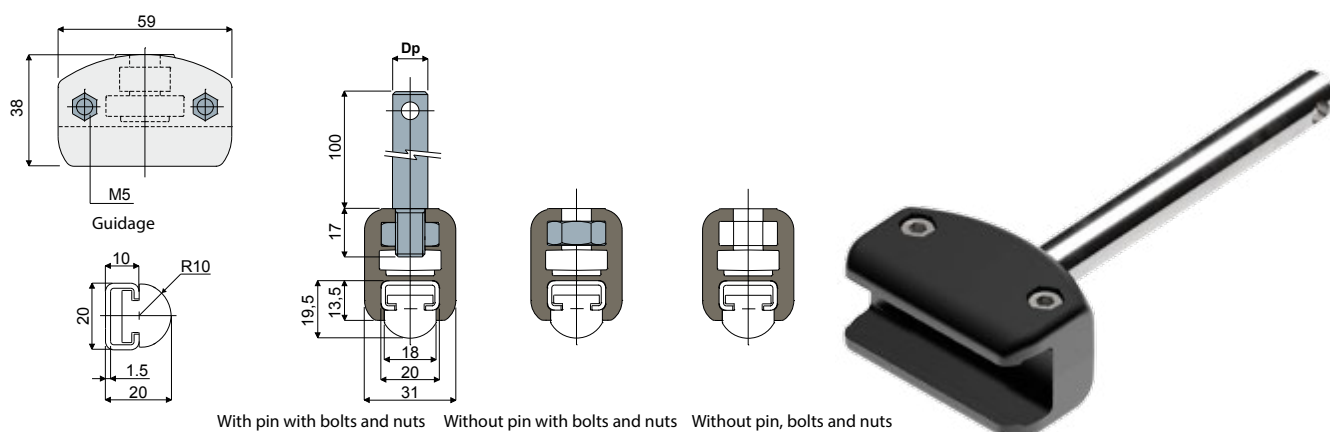

With pin with bolts and nuts Without pin with bolts and nuts Without pin, bolts and nuts

Dp Pin diameter (mm)	With pin with bolts and nuts		Without pin with bolts and nuts		Without pin, bolts and nuts	
	Type	Code	Type	Code	Type	Code
12	D90A	CP000192				
14	D90B	CP000193	D90D	CP000195	D90E	CP000196
16	D90C	CP000194				

Guide rail clamp (for trapezoidal rail) Type: D05

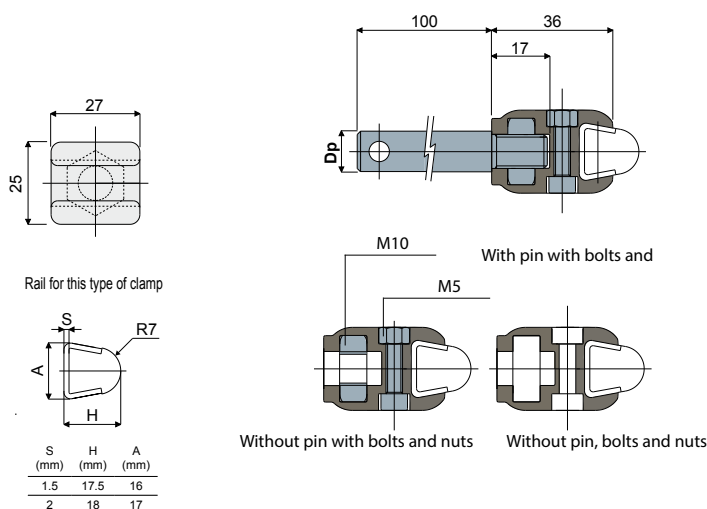

Rail for this type of clamp

S (mm)	H (mm)	A (mm)
1.5	17.5	16
2	18	17

Without pin with bolts and nuts Without pin, bolts and nuts

Dp Pin diameter (mm)	With pin with bolts and nuts		Without pin with bolts and nuts		Without pin, bolts and nuts	
	Type	Code	Type	Code	Type	Code
12	D05A	CP000197				
14	D05B	CP000198	D05D	CP000200	D05E	CP000201
16	D05C	CP000199				

MATERIALS: Clamp made of reinforced polyamide black colour; pin, bolts and nuts made of stainless steel AISI 304.


FEATURES: Supplied with or without support pin and with or without bolts and nuts. D05 can be used with rails with thickness of 1,5 and 2 mm.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Clamps: In reinforced polypropylene, other colours.
- Box Quantity: According to your request. Conditionnement: Hors standard.

Guide rail clamp (for round rail) Type: D04

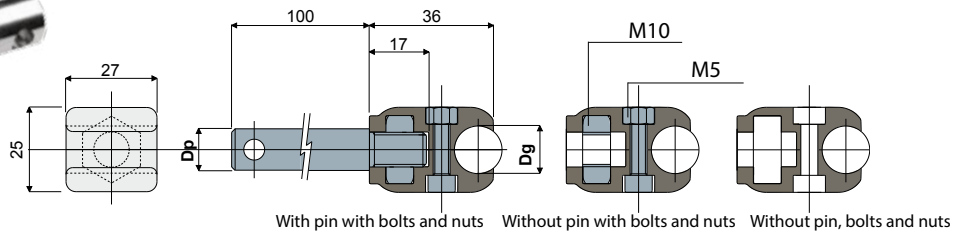

Dp Pin diameter (mm)	Dg Rail diameter (mm)	With pin with bolts and nuts	
		Type	Code
12	8	D04A	CP000202
	10	D04B	CP000203
	12	D04C	CP000204
	14	D04D	CP000205
14	8	D04E	CP000206
	10	D04F	CP000207
	12	D04G	CP000208
	14	D04H	CP000209
16	8	D04I	CP000210
	10	D04L	CP000211
	12	D04M	CP000212
	14	D04N	CP000213

Dg Rail diameter (mm)	Without pin with bolts and nuts	
	Type	Code
8	D04O	CP000214
10	D04P	CP000215
12	D04Q	CP000216
14	D04R	CP000217

Dg Rail diameter (mm)	Without pin	
	Type	Code
8	D04S	CP000218
10	D04T	CP000219
12	D04U	CP000220
14	D04V	CP000221

MATERIALS: Clamp made of reinforced polyamide black colour; pin, bolts and nuts made of stainless steel AISI 304.


FEATURES: Supplied with or without support pin and with or without bolts and nuts.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Clamps: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.


Threaded pin Type: T01

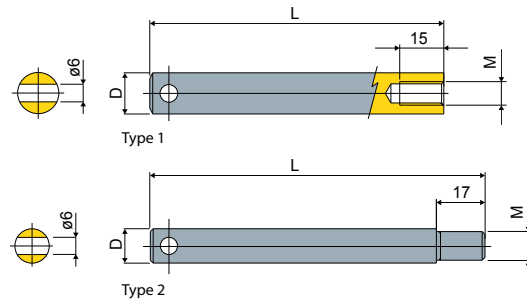

D (mm)	L (mm)	M (mm)	Type 1	
			Type	Code
14	100	M8	T01A	CP000222

D (mm)	L (mm)	M (mm)	Type 2	
			Type	Code
12	117	M10	T01B	CP000223
14	117	M10	T01C	CP000224
16	117	M10	T01D	CP000225

Example of application

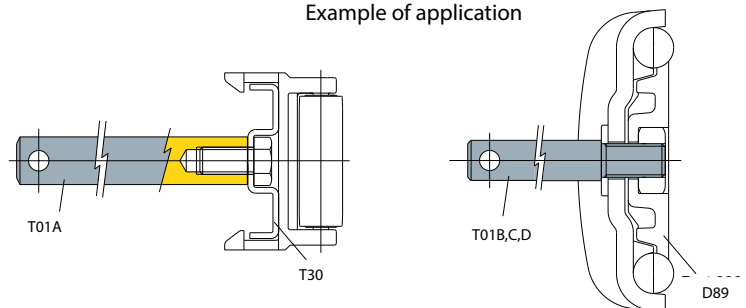

MATERIALS: Pin made of stainless steel AISI 304.

FEATURES: Type 1: can be mounted both on guide rail clamps or on side guides;



Type 2: used for the mounting of Part. 289, 229, 230, 290, 204, 205.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Pins: In various lengths.
- Box Quantity: According to your request.

Spacer for chain profile Type: T02

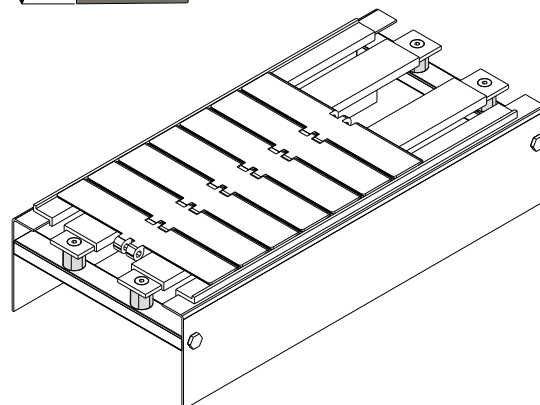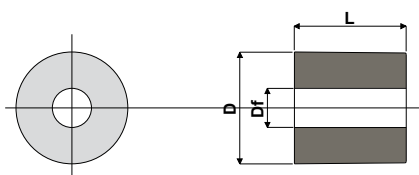

Df Bore diameter	D	L	Type	Code
(mm)	(mm)	(mm)		
7	20	20	T02A	CP000226
7	20	27,5	T02B	CP000227

MATERIALS: Spacer made of reinforced polyamide black colour.




FEATURES: To be used as fixing spacer for chain profiles.

BOX QUANTITY: 96 pieces.

ON REQUEST:

- Spacers: With special bores and sizes.
- Box Quantity: According to your request.

Spacer for rail-holder cylinder Type: T16

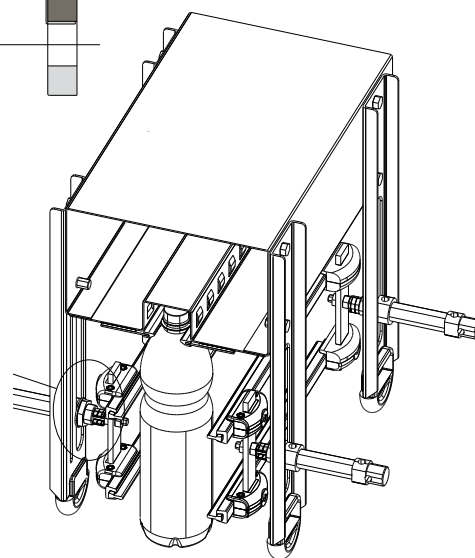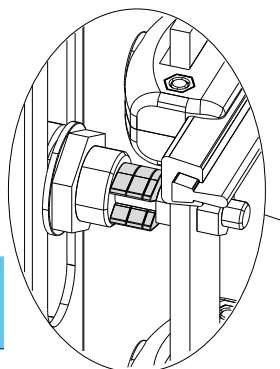

Example of application

Df Bore diameter	D	L	Type	Code
(mm)	(mm)	(mm)		
8	16	2,5	T16A	CP000228
8	16	5	T16B	CP000229

MATERIALS: Spacer made of polyamide black colour.


FEATURES: To be used as spacer for the stroke regulation of rail-holder pneumatic cylinder.

BOX QUANTITY: 96 pieces.

ON REQUEST:



- Spacers: With special bores and sizes.
- Box Quantity: According to your request.

Clamp support for photocells (for photocells and reflectors) Type: D06

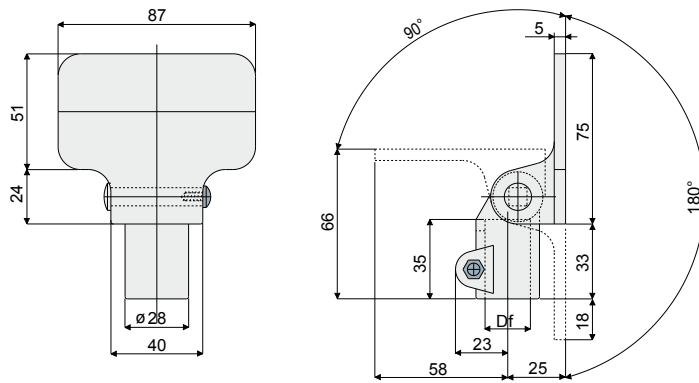


Df Bore for pin of (mm)	Type	Code
12	D06A	CP000230 (can be used also with square pins 10x10)
14	D06B	CP000231
15	D06C	CP000232
16	D06D	CP000233
18	D06E	CP000234
20	D06F	CP000235

« T » clamp (to support rails and photocells) Type: D38

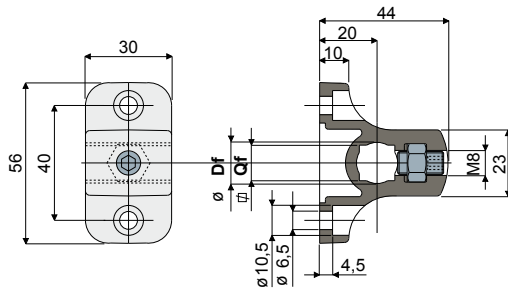

Bore for pin of		Type	Code
Df round (mm)	Qf square (mm)		
10	8	D38A	CP000236
12	10	D38B	CP000237
14	12	D38C	CP000238



Example of application

MATERIALS: Clamp made of reinforced polyamide black colour; screw and nuts made of stainless steel AISI 304.



FEATURES: Possibility of assembly in various positions. D38 can be used with round and square pins either.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Clamps: With different bores sizes, in reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Spacer for clamp (for « T » clamp, D38) Type: T24

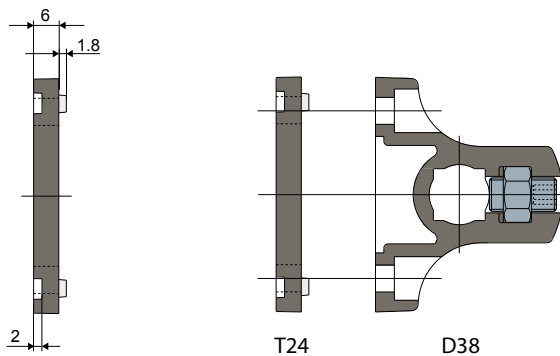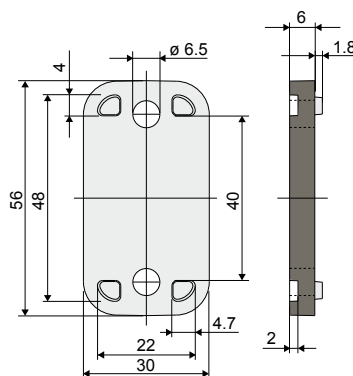

Type	Code
T24	CP000239


MATERIALS: Spacer made of reinforced polyamide black colour.

FEATURES: Accessory to be applied to "T" clamp, D38.

BOX QUANTITY: 24 pieces.


ON REQUEST:

- Spacers: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.



Example of application

Cross clamp Type: D39

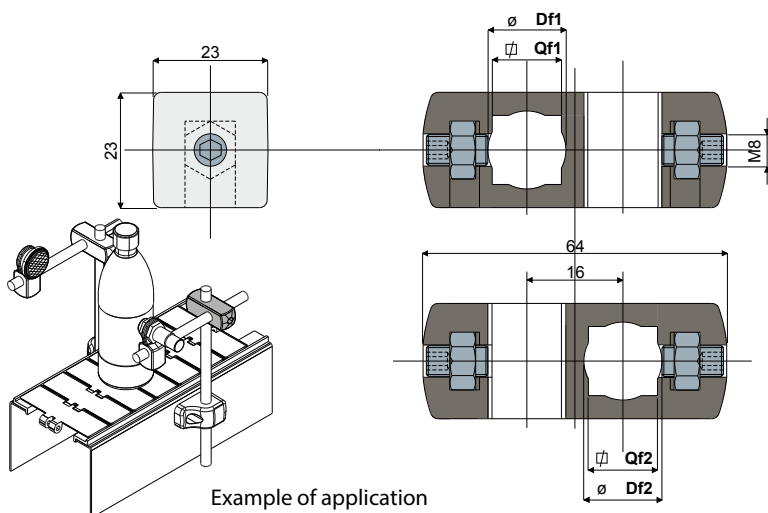

Example of application

Bore for pin of		Bore for pin of		Type	Code
Df1 round (mm)	Qf1 square (mm)	Df2 round (mm)	Qf2 square (mm)		
10	8	10	8	D39A	CP000240
12	10	12	10	D39B	CP000241
14	12	14	12	D39C	CP000242

MATERIALS: Clamp made of reinforced polyamide black colour; screws and nuts made of stainless steel AISI 304.


FEATURES: This part can be used with round and square pins either.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Clamps: With different bores sizes, in reinforced polypropylene, other colours.
- Box Quantity: According to your request.


Bore for pin of		Without blocking pin		With blocking pin	
Df round (mm)	Qf square (mm)				
10	8	D37A	CP000243	D37D	CP000246
12	10	D37B	CP000244	D37E	CP000247
14	12	D37C	CP000245	D37F	CP000248

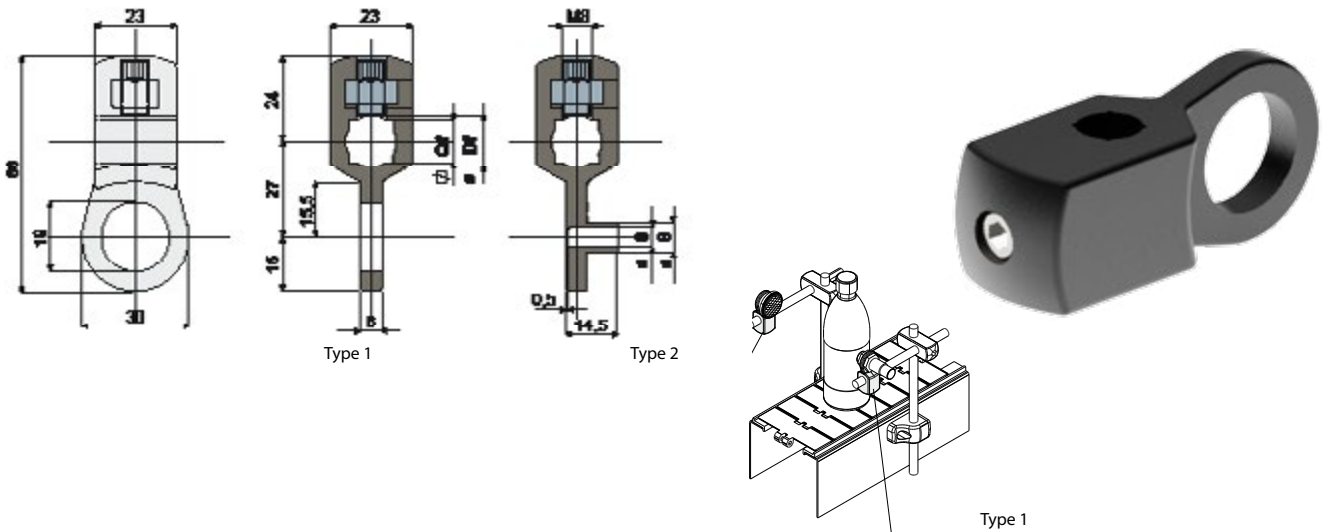

Bore for pin of		Type 1 (for photocells)		Type 2 (for reflectors)	
Df round (mm)	Qf square (mm)				
10	8	D40A	CP000249	D40D	CP000252
12	10	D40B	CP000250	D40E	CP000253
14	12	D40C	CP000251	D40F	CP000254

- Clamps: With different bores sizes, in reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Cross clamp Type: D41

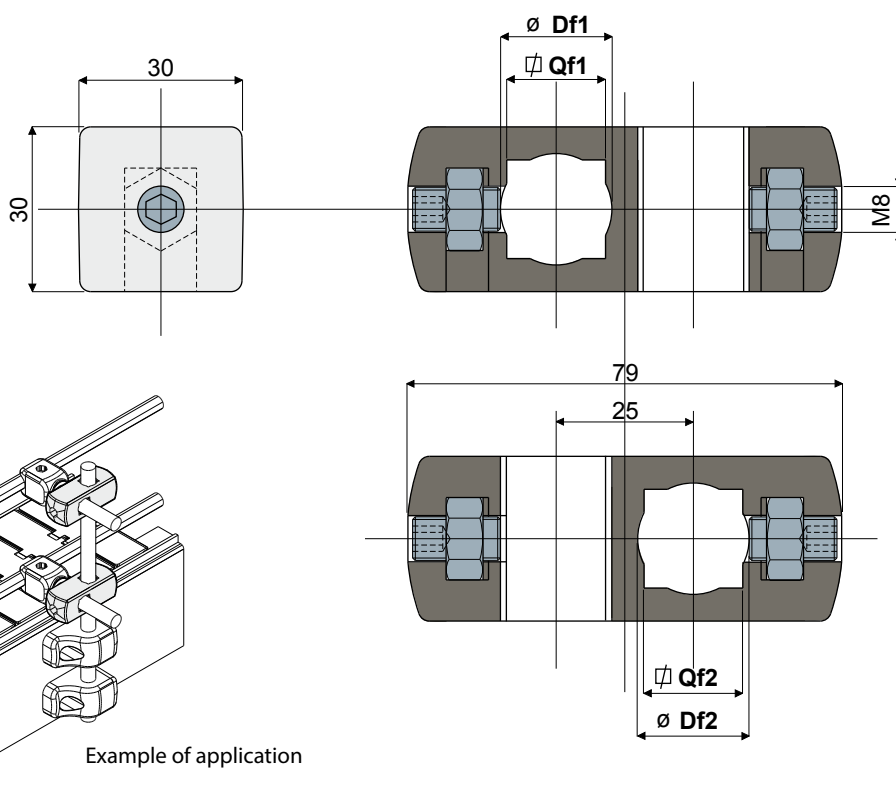

Example of application

Bore for pin of		Bore for pin of		Type	Code
Df1 round	Qf1 square	Df2 round	Qf2 square		
(mm)	(mm)	(mm)	(mm)		
14	12	14	12	D41A	CP000255
15	-	15	-	D41B	CP000256
16	-	16	-	D41C	CP000257
18	-	18	-	D41D	CP000258
20	-	20	-	D41E	CP000259

MATERIALS: Clamp made of reinforced polyamide black colour; screws and nuts made of stainless steel AISI 304.



FEATURES: This part can be used with round and square pins either, only in the version Df1 14.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Clamps: With different bores sizes, in reinforced polypropylene, other colours.
- Box Quantity: According to your request.



Cross block Type: D97

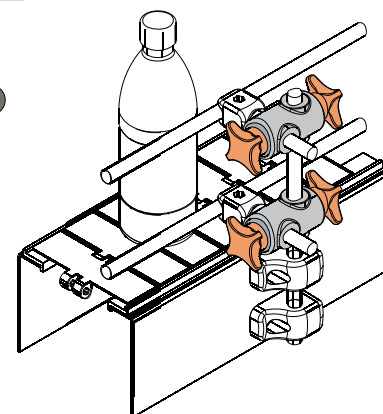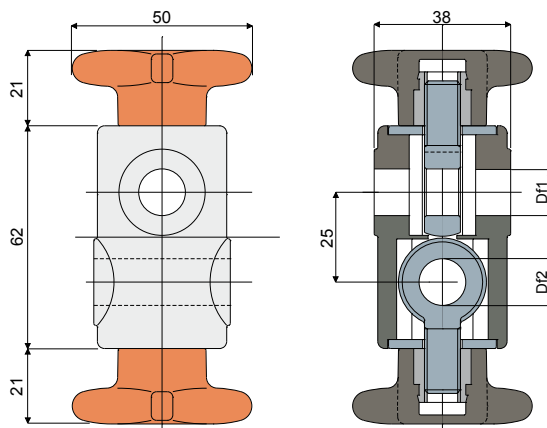

Example of application

Df1 Bore for pin of (mm)	Df2 Bore for pin of (mm)	Type	Code
12	12	D97	CP000260

Cross block Type: T12

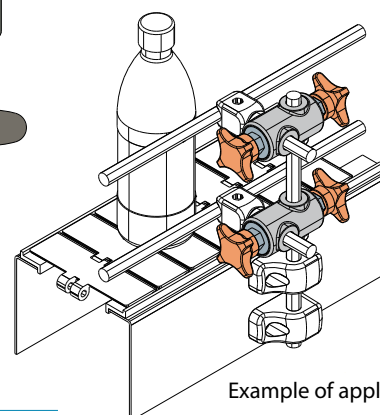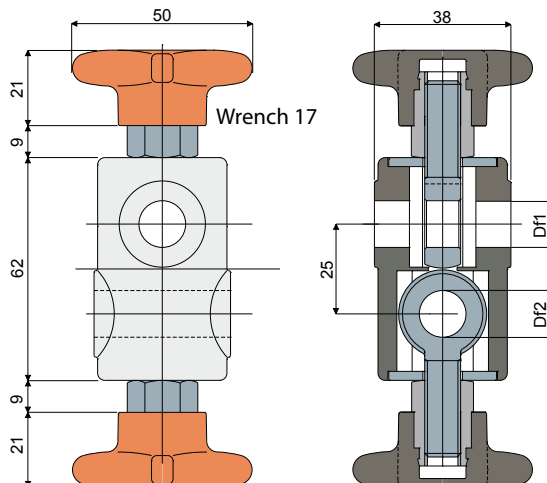

Example of application

Df1 Bore for pin of (mm)	Df2 Bore for pin of (mm)	Type	Code
12	12	T12A	CP000261
14	14	T12B	CP000262
16	16	T12C	CP000263

MATERIALS: Housing in reinforced polyamide black colour and knob in reinforced polyamide orange colour; eyebolts in stainless steel AISI 304; threaded insert in nickel plated brass.


FEATURES: To be used to support the rail-holder pins.

BOX QUANTITY: 24 pieces.

ON REQUEST:


- Housings and Knobs: in reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Knob for bracket Type: D26

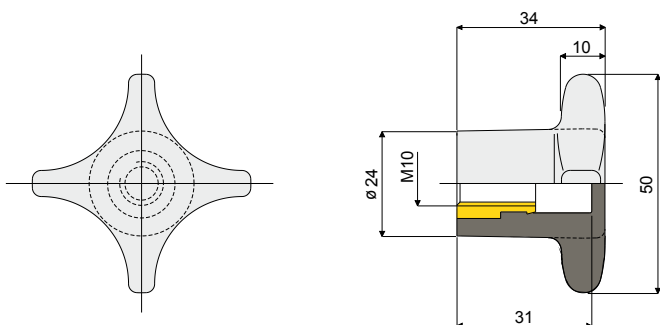


Type	Code
D26	CP000264

Knob for bracket Type: D27

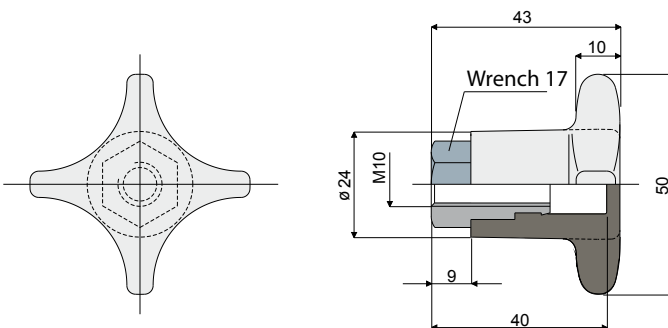

Type	Code
D27	CP000265

Knob for bracket Type: D28

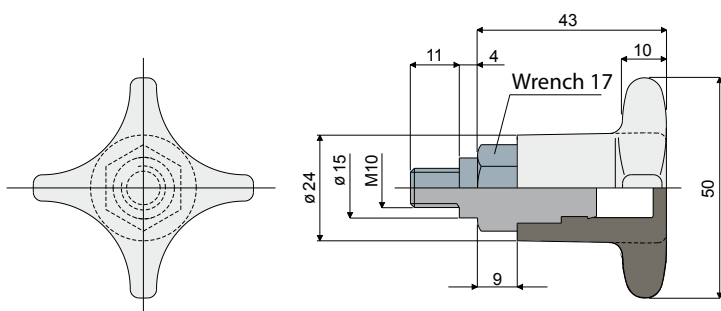

Type	Code
D28	CP000266

MATERIALS: Knob made of reinforced polyamide black colour; threaded bushing made of brass.


FEATURES: Accessories D26, D7 are used with heads D21 and D66, while D28 is used with heads D23.

BOX QUANTITY: 24 pieces.

ON REQUEST:


- Knobs: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Knob for bracket (reinforced type) Type: D46

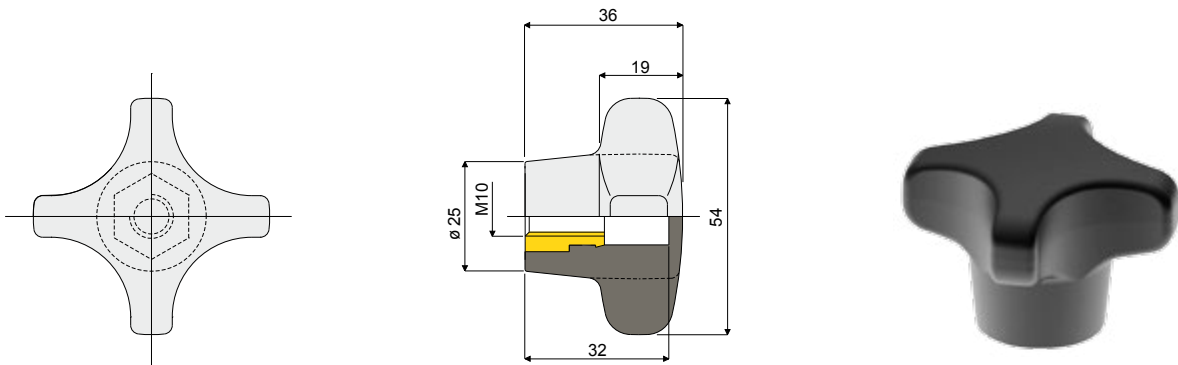


Type	Code
D46	CP000267

Knob for bracket (reinforced type) Type: D47

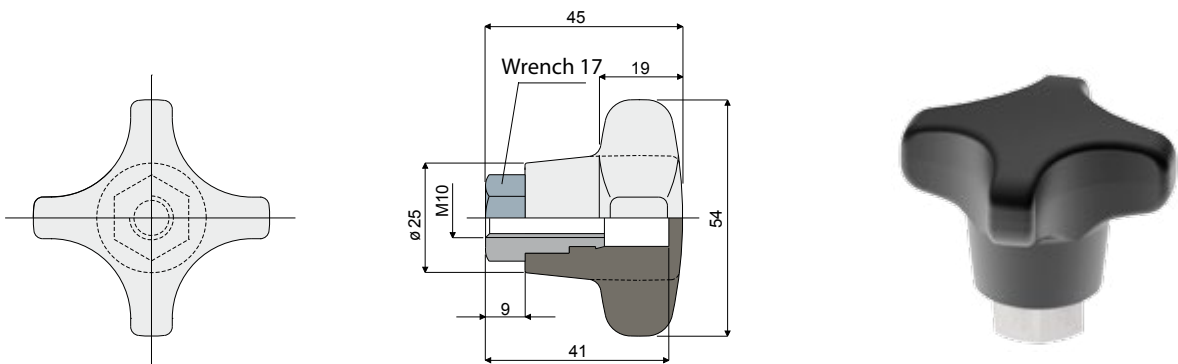

Type	Code
D47	CP000268

Knob for bracket (reinforced type) Type: D48

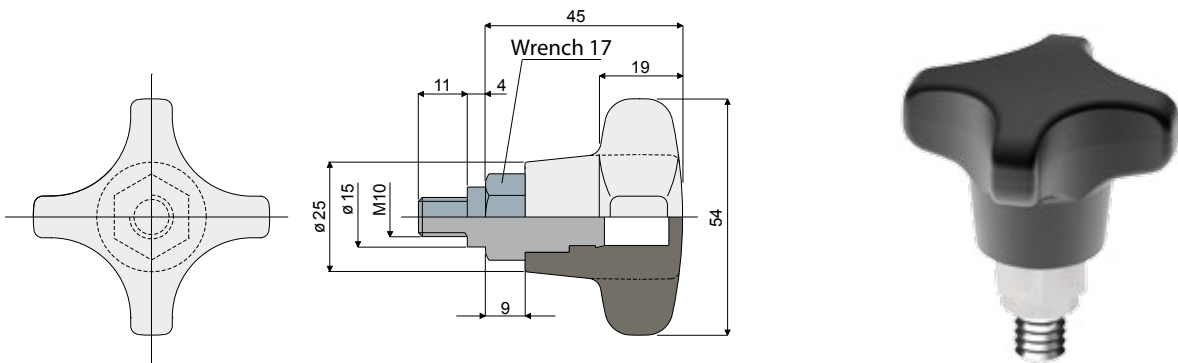

Type	Code
D48	CP000269

MATERIALS: Knob made of reinforced polyamide black colour; threaded bushing is made of brass.


FEATURES: Accessories D46, D47 are applied to our heads D21 and D66., while D48 is applied to D23.

BOX QUANTITY: 24 pieces.

ON REQUEST:


- Knobs: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Knob for bracket (short type) Type: T13

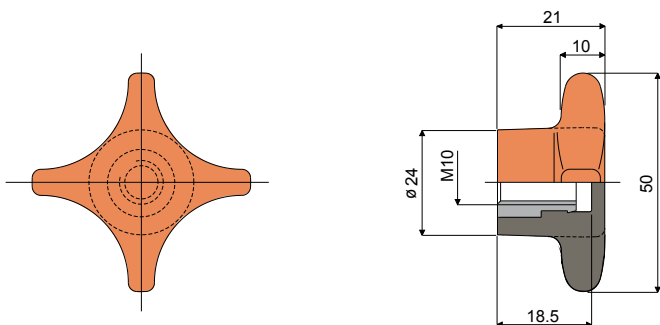


Type	Code
T13	CP000270

Manette de serrage (short type) Type: T14

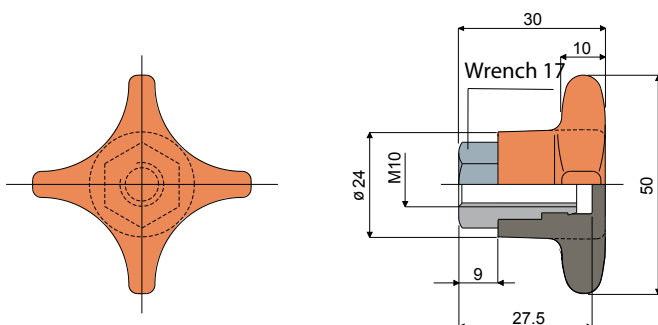

Type	Code
T14	CP000271

Manette de serrage (short type) Type: T15

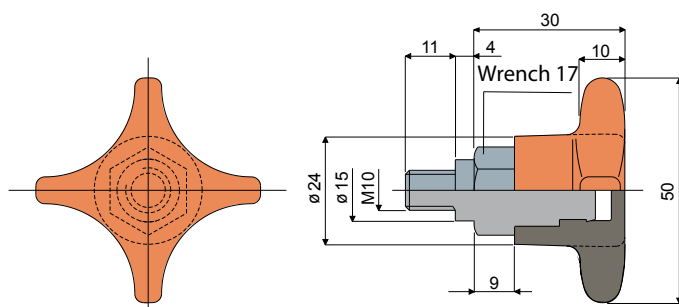

Type	Code
T15	CP000272

MATERIALS: Knob made of reinforced polyamide orange colour; threaded bushing made of nickel plated brass.



FEATURES: Accessories T13, T14 are used with heads D21 and D66, while T15 is used with D23.

BOX QUANTITY: 24 pieces.

ON REQUEST:



- Knobs: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Round handle (ø 44 mm) Type: T34





Type	Code
T34	CP000273

Round handle (ø 44 mm) Type: T37



Type	Code
T37	CP000274

Round handle (ø 44 mm) Type: T38

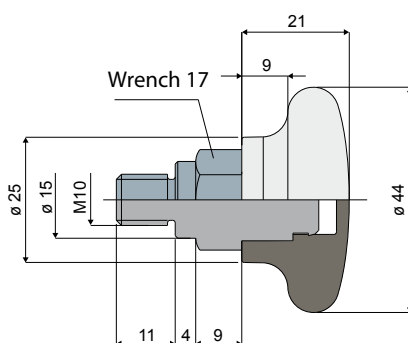

Type	Code
T38	CP000275

MATERIALS: Handle made of reinforced polyamide black colour; threaded bushing made of nickel plated brass.


FEATURES: Accessories T36, T37 are used with heads D21 and D66, while T38 is used with D23.

BOX QUANTITY: 24 pieces.

ON REQUEST:


- Handles: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

"T" handle Type: T03

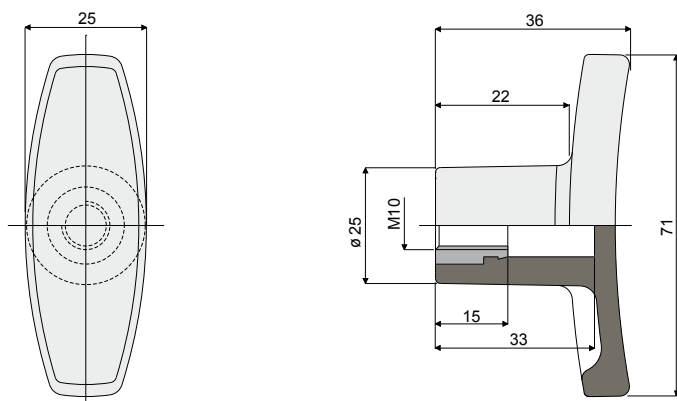


Type	Code
T03	CP000276

"T" handle Type: T04

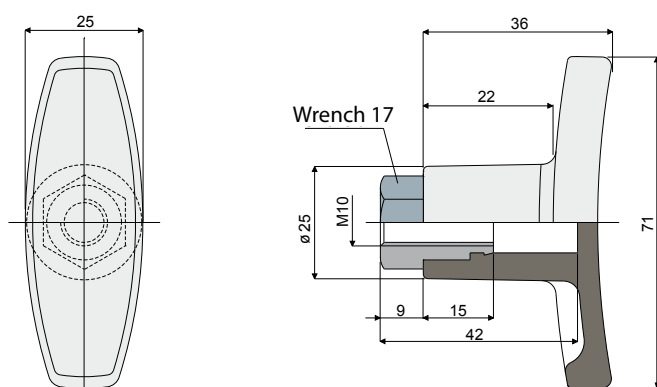

Type	Code
T04	CP000277

"T" handle Type: T05

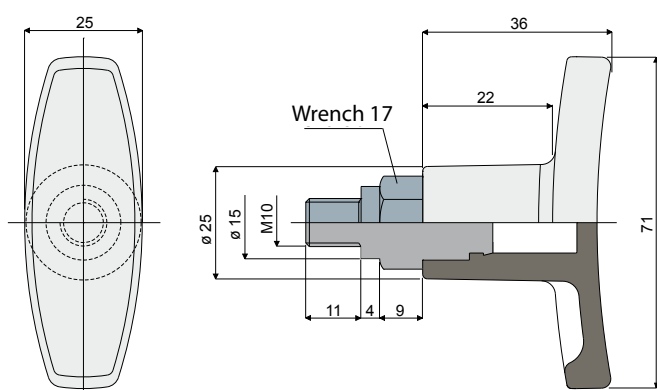


Type	Code
T05	CP000278

MATERIALS: Handle is made of reinforced polyamide black colour; threaded bushing is made of nickel plated brass.


BOX QUANTITY: 24 pieces.

ON REQUEST:


- Handles: made of reinforced polypropylene, other colours.
- Box Quantity: According to your request.

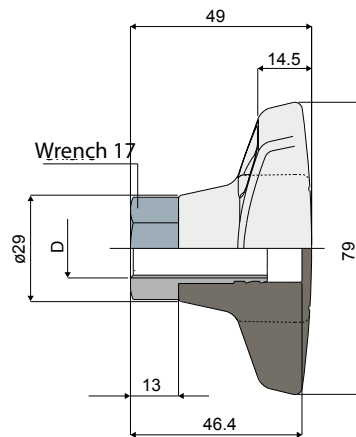

- Knobs: In reinforced polypropylene, other colours, with customized brand.
- Box Quantity: According to your request.


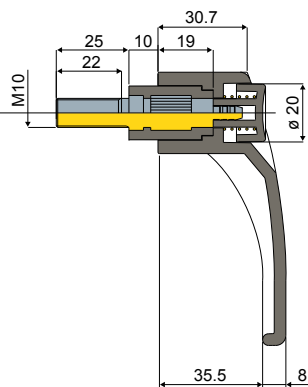


- **Handles:** With threaded inserts M8, M10, M12, with different lengths; also available in stainless steel AISI 304.
- **Box Quantity:** According to your request.

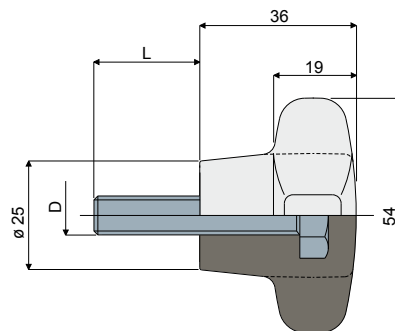



ON REQUEST: • Knobs: made of reinforced polypropylene, in other colours. • Box
Quantity: According to your request.

Hinge Type: D33

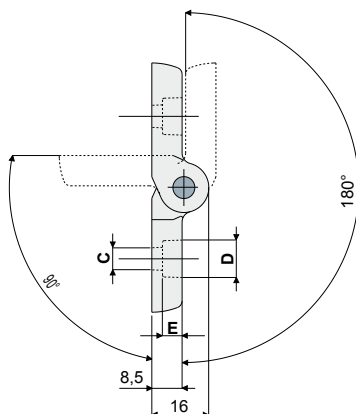

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Type	Code
34	50	5,5	10,5	3,5	34	D33A	CP000284
31	50	5,5	9	5	30	D33B	CP000285
40	70	6,5	10,5	6	30	D33C	CP000286
46	70	6,5	10,5	6	30	D33D	CP000287
46	70	8,5	13,5	5	30	D33E	CP000288

Hinge Type: D34

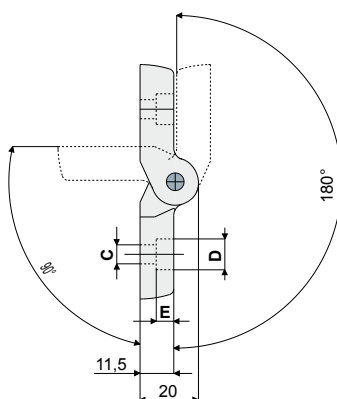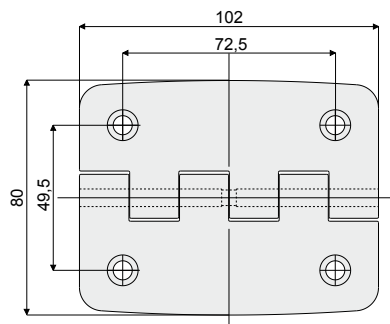

C (mm)	D (mm)	E (mm)	Type	Code
6,5	10,5	6	D34A	CP000289
8,5	13,5	8	D34B	CP000290

MATERIALS: Hinge made of reinforced polyamide black colour; pin made of stainless steel AISI 304.


FEATURES: Maximum rotation 270°

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Hinges: In reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Idler wheel for chain return Type: D68

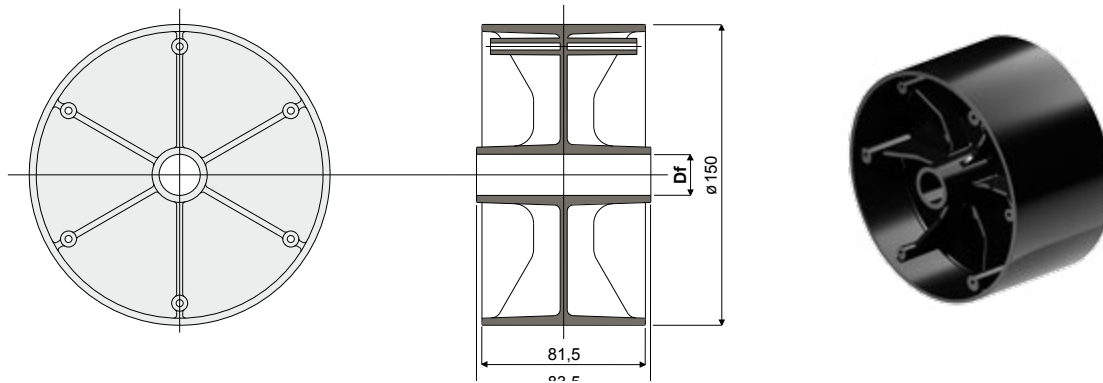

Df Bore for pin of (mm)	Type	Code
20	D68	CP000291

MATERIALS: Wheel in polyamide black colour.


FEATURES: To be assembled in the chain return near to the sprocket.

BOX QUANTITY: 12 pieces.

ON REQUEST:

- Wheels: Other bore sizes, materials and colours.
- Box Quantity: According to your request.

Flange for chain guide (for idler wheel D68) Type: D69

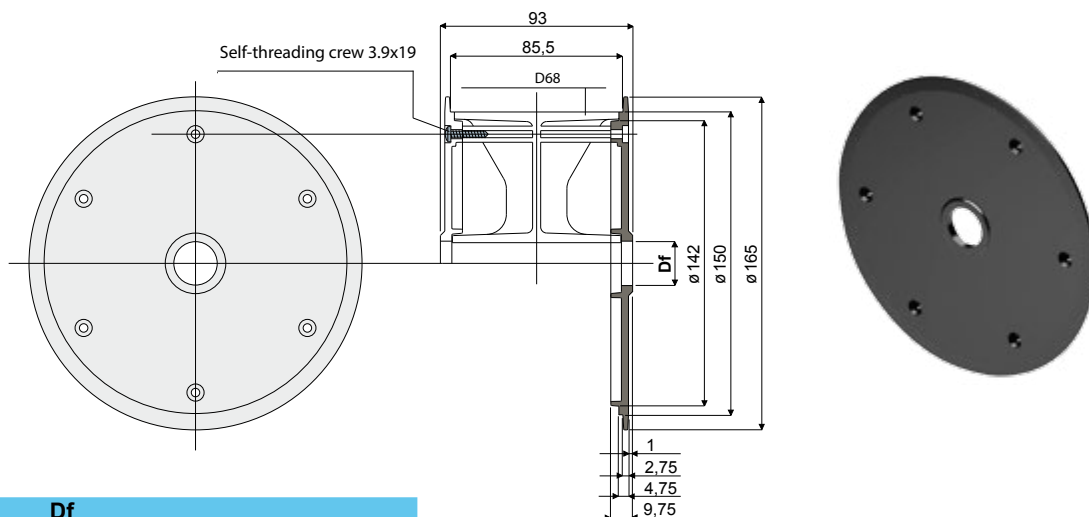

Df Bore for shaft of (mm)	Type	Code
20	D69	CP000292

MATERIALS: Flange is made of polyamide black colour; self-threading screws are made of stainless steel AISI 304.


FEATURES: To be assembled to our idler wheel D68 for chain guide. Supplied complete with blocking screws.

BOX QUANTITY: 24 pieces.

ON REQUEST:


- Flanges: Other bore sizes, materials and colours.
- Box Quantity: According to your request.

Split idler wheel 21 teeth (for chains series 812-815-820-831) Type: T11

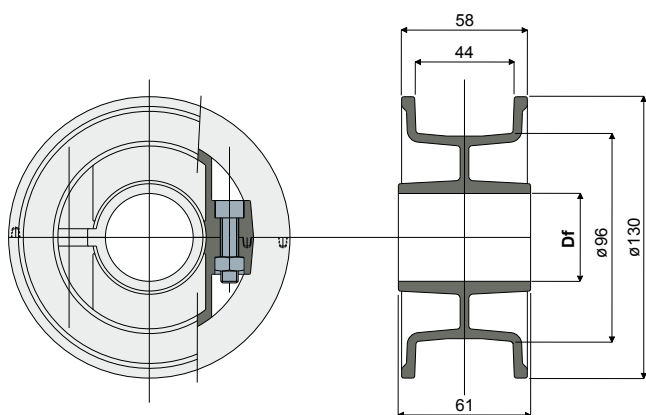

Df Bore for shaft of (mm)	Type	Code
25	T11A	CP000293
30	T11B	CP000294
35	T11C	CP000295
40	T11D	CP000296

Split idler wheel 25 teeth (for chains series 812-815-820-831) Type: D85

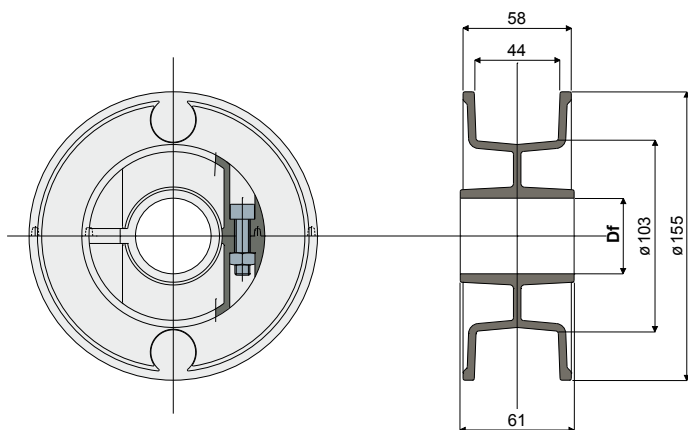

Df Bore for pin of (mm)	Type	Code
25	D85A	CP000297
30	D85B	CP000298
35	D85C	CP000299
40	D85D	CP000300

MATERIALS: Wheel made of polyamide black colour; bolts and nuts made of stainless steel AISI 304.


FEATURES: Supplied assembled. To be used for chain return in the series 812, 815, 820, 831.

BOX QUANTITY: 12 pieces.

ON REQUEST:

- Wheels: With special bores, other colours.
- Box Quantity: According to your request.

Split idler wheel 25 teeth (for chains series 879 Tab, 880 Tab, 881 Tab) Type: T10

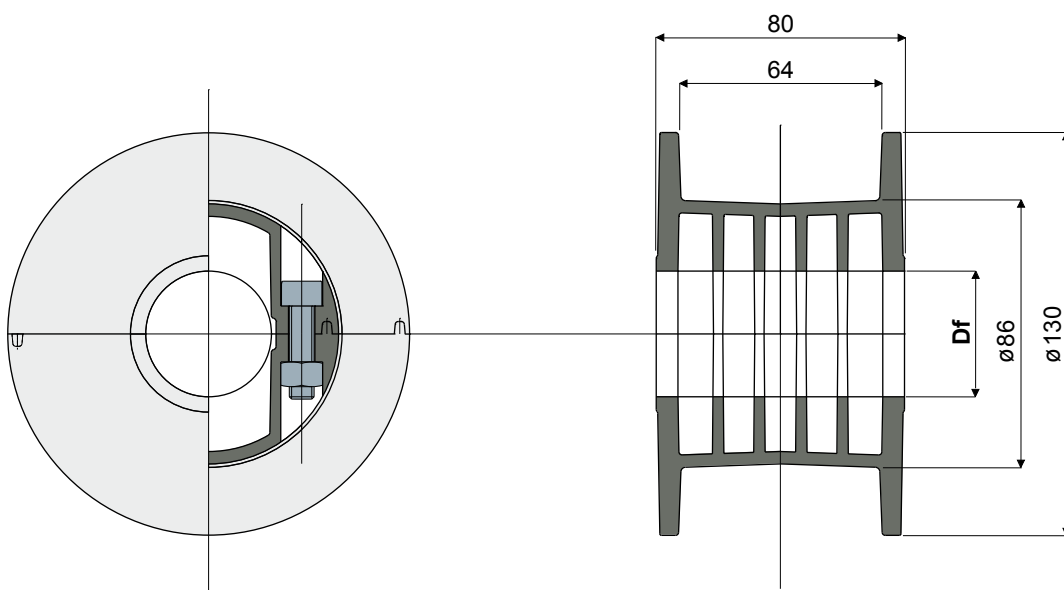

Df Bore for shaft of (mm)	Type	Code
20	T10A	CP000301
25	T10B	CP000302
30	T10C	CP000303
35	T10D	CP000304
40	T10E	CP000305

MATERIALS: Wheel made of polyamide black colour; bolts and nuts made of stainless steel AISI 304.


FEATURES: Supplied assembled. To be used for chain return in series 879 Tab, 880 Tab and 881 Tab.

BOX QUANTITY: 12 pieces.

ON REQUEST:


- Wheels: With special bores, other colours.
- Box Quantity: According to your request.

Bagues d'arret Type: D88

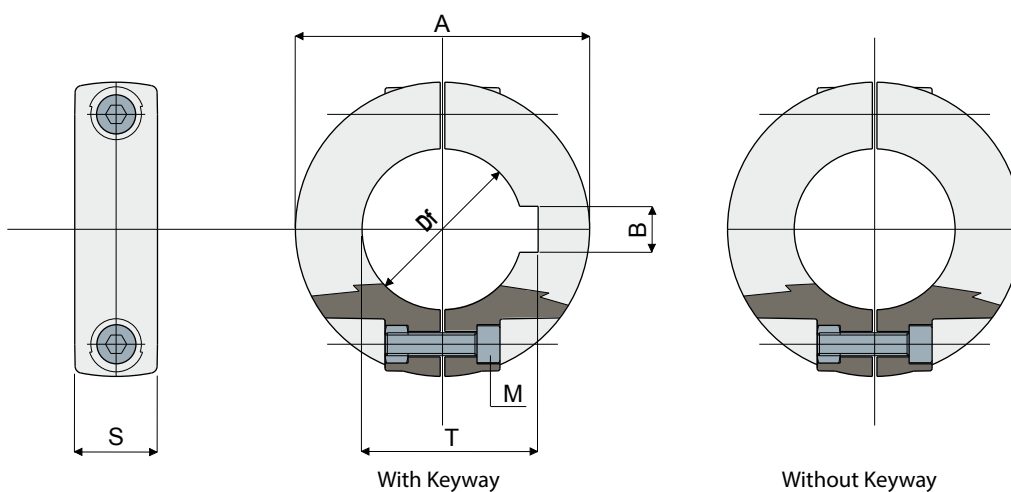


With Keyway							
Df (mm)	A (mm)	S (mm)	M (mm)	B (mm)	T (mm)	Type	Code
20	40	14	M4	6	22,8	D88A	CP000306
25	50	14	M5	8	28,3	D88B	CP000307
30	50	14	M5	8	33,3	D88C	CP000308
35	65	14	M5	10	38,3	D88D	CP000309
40	65	14	M5	12	43,3	D88E	CP000310


Without Keyway					
Df (mm)	A (mm)	S (mm)	M (mm)	Type	Code
12	35	13	M4	D88F	CP000311
14	35	13	M4	D88G	CP000312
16	35	13	M4	D88H	CP000313
18	40	14	M4	D88I	CP000314
20	40	14	M4	D88L	CP000315
25	50	14	M5	D88M	CP000316
30	50	14	M5	D88N	CP000317
35	65	14	M5	D88O	CP000318
40	65	14	M5	D88P	CP000319




Sprockets



Idler wheels



rollers for chain return



guide rail bracket

MATERIALS: Collars made out of reinforced polyamide black colour; bolt and nuts made out of stainless steel AISI 304.


FEATURES: Supplied assembled. To be assembled on the shaft to obtain wheels axial blocking; to be assembled on pins for guides supporting to adjust the position of guides according to the bottle size.

BOX QUANTITY: 96 pieces.

ON REQUEST: • Collars: With special bores, other colours. • Box Quantity: According to your request.


Example of applications

Roller for chain return (with flange) Type: D50

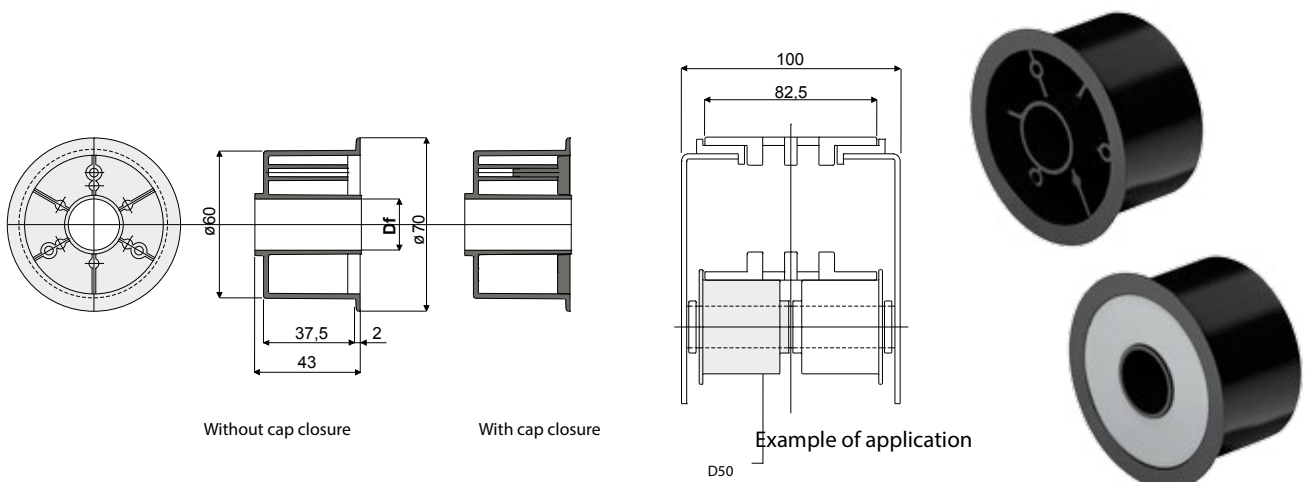

Df Bore for pin of (mm)	Without cap closure		With cap closure	
	Type	Code	Type	Code
15	D50A	CP000320	D50E	CP000324
16	D50B	CP000321	D50F	CP000325
18	D50C	CP000322	D50G	CP000326
20	D50D	CP000323	D50H	CP000327

Roller for chain return (without flange) Type: D51

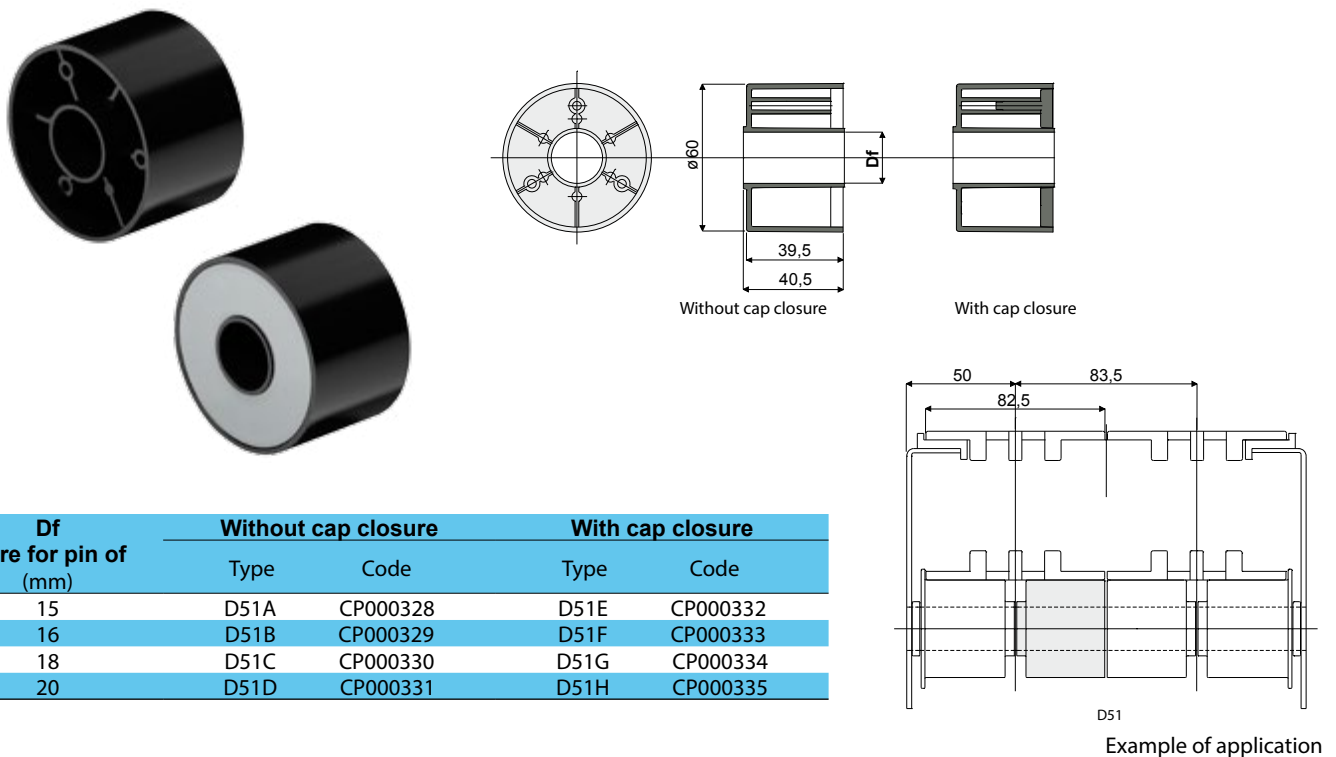

Df Bore for pin of (mm)	Without cap closure		With cap closure	
	Type	Code	Type	Code
15	D51A	CP000328	D51E	CP000332
16	D51B	CP000329	D51F	CP000333
18	D51C	CP000330	D51G	CP000334
20	D51D	CP000331	D51H	CP000335

MATERIALS: Roller made out of polyamide black colour; cap made out of polyamide grey colour.




FEATURES: To be assembled in the chain return.

BOX QUANTITY: 96 pieces.

ON REQUEST:


- Rollers: Special bores, other colours.
- Box Quantity: According to your request.

Roller for chain return (with flange) Type: D52



With cap closure




Without cap closure

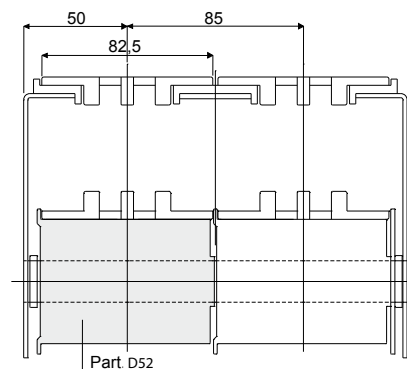

Example of application

Df Bore for pin of (mm)	Without cap closure		With cap closure	
	Type	Code	Type	Code
12	D52A	CP000336	D52I	CP000344
14	D52B	CP000337	D52L	CP000345
15	D52C	CP000338	D52M	CP000346
16	D52D	CP000339	D52N	CP000347
18	D52E	CP000340	D52O	CP000348
20	D52F	CP000341	D52P	CP000349
25	D52G	CP000342	-	-
30	D52H	CP000343	-	-


Roller for chain return (with double flange) Type: D96



With cap closure

Without cap closure

Example of application

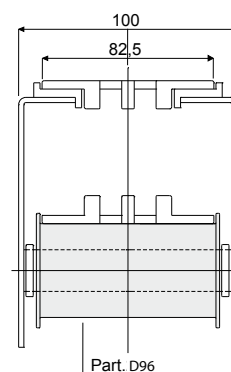

Df Bore for pin of (mm)	Without cap closure		With cap closure	
	Type	Code	Type	Code
12	D96A	CP000350	D96G	CP000356
14	D96B	CP000351	D96H	CP000357
15	D96C	CP000352	D96I	CP000358
16	D96D	CP000353	D96L	CP000359
18	D96E	CP000354	D96M	CP000360
20	D96F	CP000355	D96N	CP000361

MATERIALS: Roller made out of polyamide black colour; cap made out of polyamide grey colour.


FEATURES: To be assembled in the chain return.

BOX QUANTITY: 48 pieces.

ON REQUEST:


- Rollers: Special bores, other colours.
- Box Quantity: According to your request.

Roller for chain return (without flange) Type: D53

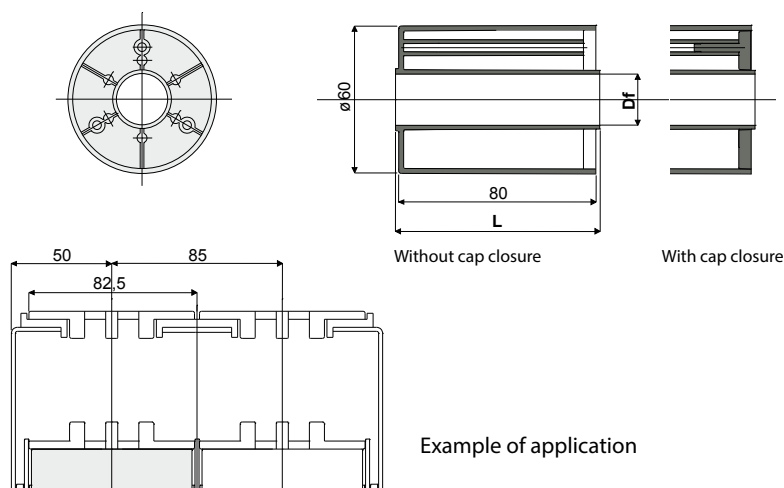

Df Bore for pin of (mm)	Without cap closure				With cap closure			
	L = 82 mm		L = 84 mm		L = 82 mm		L = 84 mm	
	Type	Code	Type	Code	Type	Code	Type	Code
12	D53A	CP000362	D53G	CP000368	D53Q	CP000376	D53Z	CP000382
14	D53B	CP000363	D53H	CP000369	D53R	CP000377	D53W	CP000383
15	D53C	CP000364	D53I	CP000370	D53S	CP000378	D53X	CP000384
16	D53D	CP000365	D53L	CP000371	D53T	CP000379	D53Y	CP000385
18	D53E	CP000366	D53M	CP000372	D53U	CP000380	D53J	CP000386
20	D53F	CP000367	D53N	CP000373	D53V	CP000381	D53K	CP000387
25	-	-	D53O	CP000374	-	-	-	-
30	-	-	D53P	CP000375	-	-	-	-

Roller for chain return (with flange) Type: D70

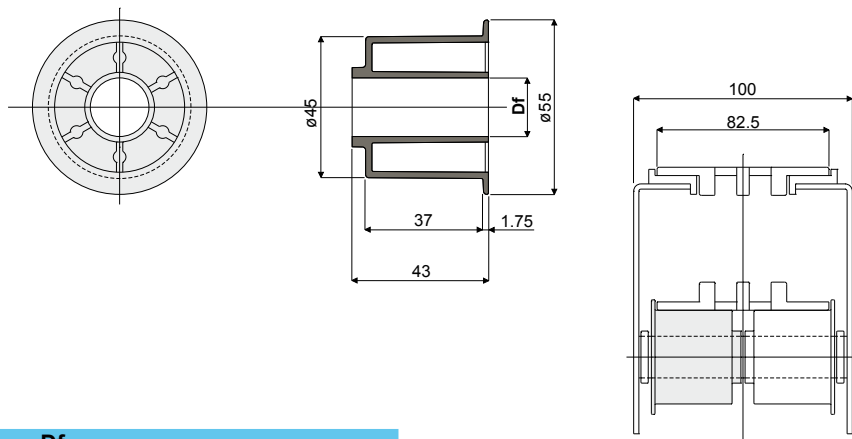

Df Bore for pin of (mm)	Type	Code
15	D70A	CP000388
20	D70B	CP000389

MATERIALS: Roller made out of polyamide black colour; cap made out of polyamide grey colour.


FEATURES: To be assembled in the chain return.

BOX QUANTITY: D53: 48 pieces. D70: 96 pieces.

ON REQUEST:

- Rollers: Special bores, other colours.
- Box Quantity: According to your request.


Roller for chain return (without flange) Type: D71

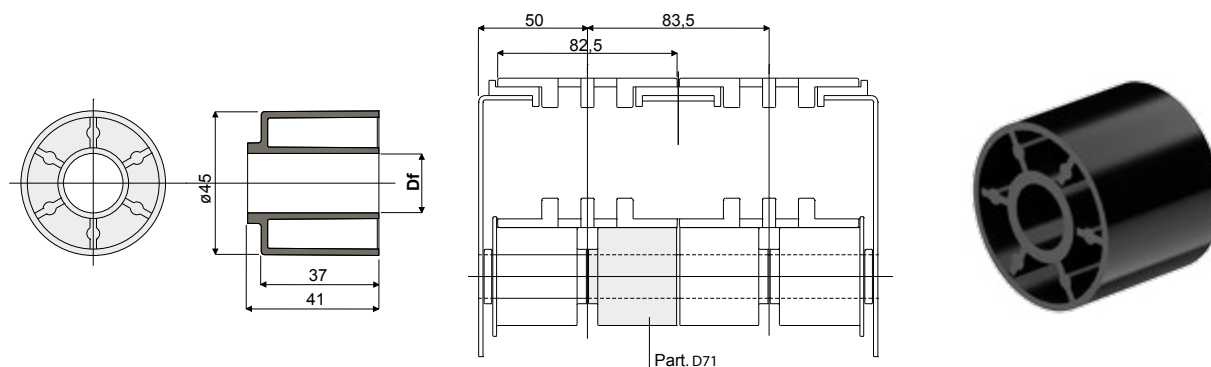

Example of application

Df Bore for pin of (mm)	Type	Code
15	D71A	CP000390
20	D71B	CP000391

Roller for chain return (with flange) Type: D73

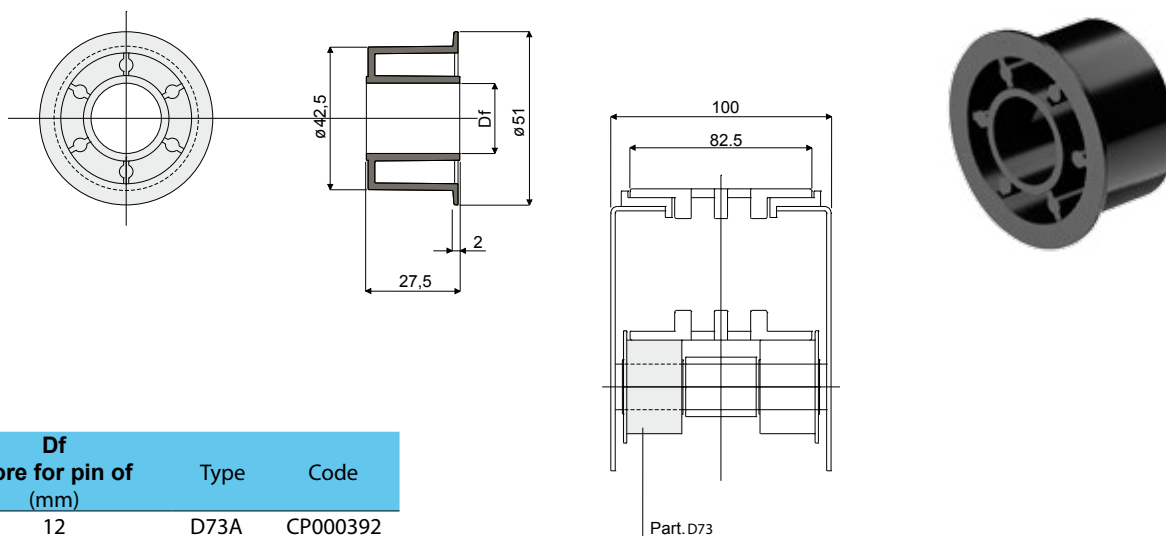

Example of application

Df Bore for pin of (mm)	Type	Code
12	D73A	CP000392
16	D73B	CP000393
18	D73C	CP000394
20	D73D	CP000395

MATERIALS: Roller made of polyamide black colour.



FEATURES: To be assembled in the chain return.

BOX QUANTITY: 96 pieces.


ON REQUEST:

- Rollers: Special bores, other colours.
- Box Quantity: According to your request.

Double roller for chain return (with central flange) Type: D74





Df Bore for pin of (mm)	Type	Code
12	D74A	CP000396
16	D74B	CP000397
18	D74C	CP000398
20	D74D	CP000399

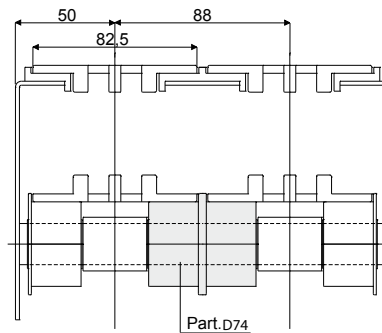


Example of application

Double roller for chain return (with central flange) Type: D87



Df Bore for pin of (mm)	Type	Code
12	D87A	CP000400
16	D87B	CP000401
18	D87C	CP000402
20	D87D	CP000403

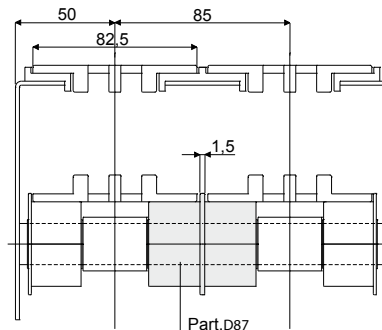

Example of application

MATERIALS: Roller made of polyamide black colour.


FEATURES: To be assembled in the chain return.

BOX QUANTITY: 96 pieces.


ON REQUEST:

- Rollers: Special bores, other colours.
- Box Quantity: According to your request.

Double roller for chain return (without central flange) Type: D86

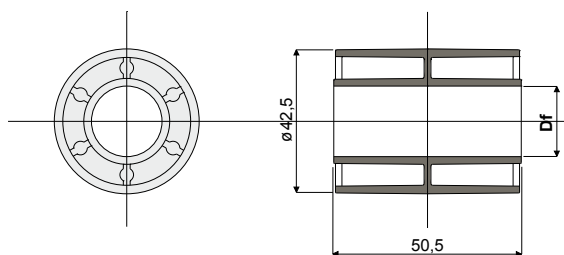


Df Bore for pin of (mm)	Type	Code
12	D86A	CP000404
16	D86B	CP000405
18	D86C	CP000406
20	D86D	CP000407

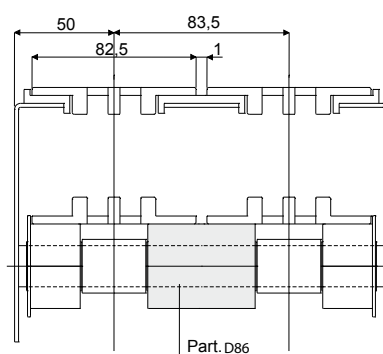


Example of application

Spacer for rollers for chain return Type: D75

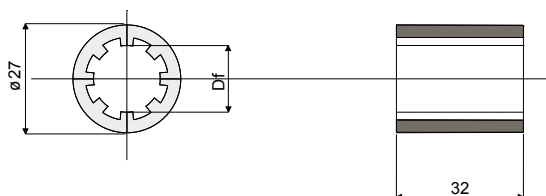

Df Bore for pin of (mm)	Type	Code
12	D75A	CP000408
16	D75B	CP000409
18	D75C	CP000410
20	D75D	CP000411

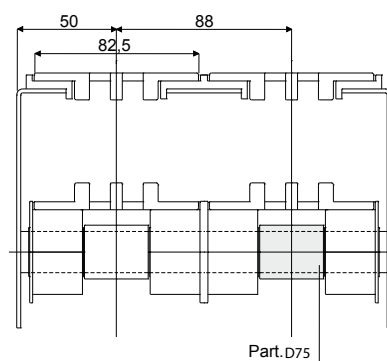

Example of application

MATERIALS: Roller made of polyamide black colour.


FEATURES: D86 is used in the chain return, while D75 is used like roller's spacer.

BOX QUANTITY: 96 pieces.

ON REQUEST:

- Rollers: Special bores, other colours.
- Box Quantity: According to your request.

Spacer for rollers for chain return Type: D72

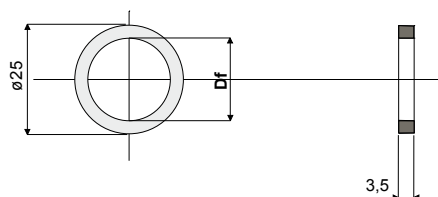

Df Bore for pin of (mm)	Type	Code
15	D72A	CP000412
20	D72B	CP000413


MATERIALS: Spacer made of polyamide black colour.

FEATURES: To be assembled in the chain return.

BOX QUANTITY: 96 pieces.

ON REQUEST:




- Spacers: Special bores, other colours.
- Box Quantity: According to your request.

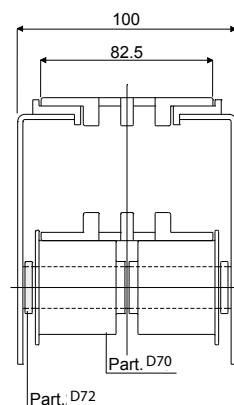

Example of application



Self-adjusting sliding shoe for chain return Type: D67

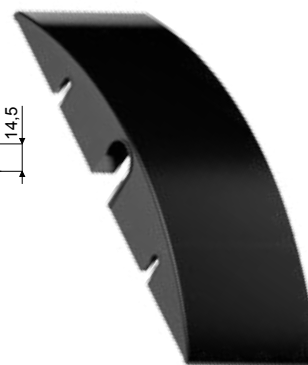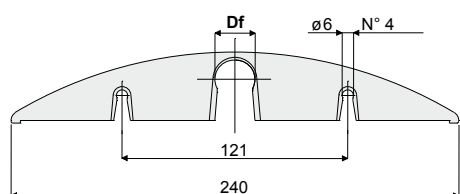

Df Bore for pin of (mm)	Polyamide (black colour)		Polyethylene (green colour)	
	Type	Code	Type	Code
18	D67A	CP000414	D67C	CP000416
20	D67B	CP000415	D67D	CP000417

MATERIALS: Sliding shoe is made of polyamide black colour or of polyethylene green colour.



FEATURES: To be assembled in the chain return near to the sprocket. Snap-on assembly.

BOX QUANTITY: 12 pieces.

ON REQUEST:

- Sliding shoes: Other bore sizes, and colours.
- Box Quantity: According to your request.



Roller with rubber for chain return (with flange) Type: D49

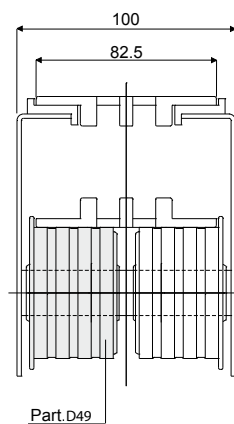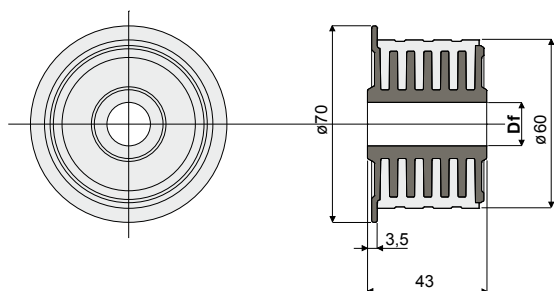

Example of application

Df Bore for pin of (mm)	Type	Code
15	D49A	CP000418
16	D49B	CP000419
18	D49C	CP000420
20	D49D	CP000421

Roller with rubber for chain return (without flange) Type: D45

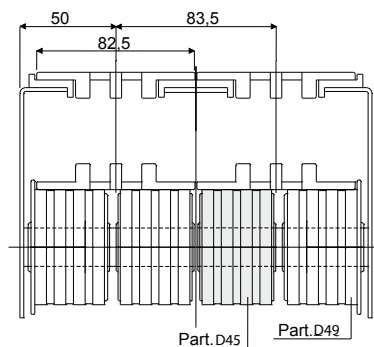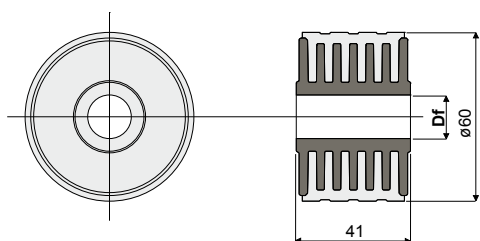

Example of application

Df Bore for pin of (mm)	Type	Code
15	D45A	CP000422
16	D45B	CP000423
18	D45C	CP000424
20	D45D	CP000425

MATERIALS: Internal part is made of polyamide black colour; external rubber is made of PVC grey colour 65 shore.


FEATURES: This roller is completely closed, total lack of internal cavities to obtain the maximum level of cleanability and noiselessness during working operations.

BOX QUANTITY: 48 pieces.

ON REQUEST:

- Rollers: Special bores, other colours.
- Box Quantity: According to your request.

Roller with rubber for chain return (without flange) Type: D93

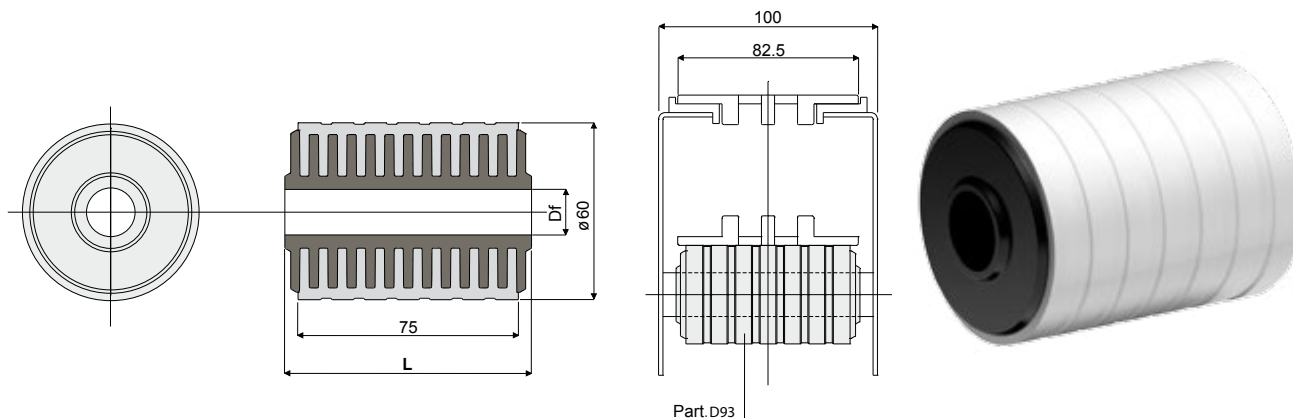


Part. D93

Example of application

Df Bore for pin of (mm)	L = 82 mm		L = 84 mm	
	Type	Code	Type	Code
12	D93A	CP000426	D93G	CP000431
15	D93B	CP000427	D93H	CP000432
16	D93C	CP000428	D93I	CP000433
18	D93D	CP000429	D93L	CP000434
20	D93E	CP000430	D93M	CP000435

Roller with rubber for chain return (without flange) Type: D76

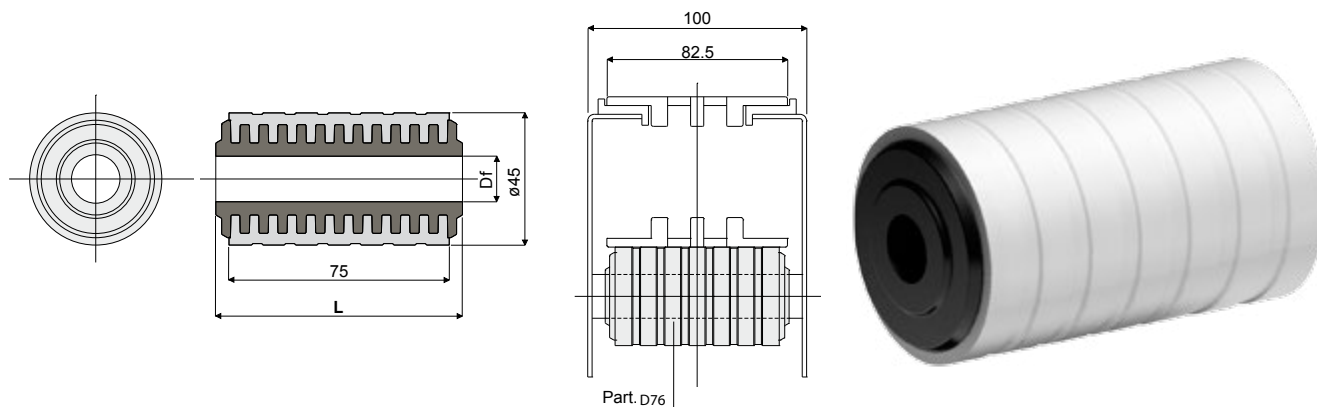

Part. D76

Example of application

Df Bore for pin of (mm)	L = 82 mm		L = 84 mm	
	Type	Code	Type	Code
12	D76A	CP000436	D76G	CP000441
15	D76B	CP000437	D76H	CP000442
16	D76C	CP000438	D76I	CP000443
18	D76D	CP000439	D76L	CP000444
20	D76E	CP000440	D76M	CP000445

MATERIALS: Internal part is made of polyamide black colour; external rubber is made of PVC grey colour 65 shore.



FEATURES: This roller is completely closed, total lack of internal cavities to obtain the maximum level of cleanability and noiselessness during working operations.

BOX QUANTITY: 48 pieces.

ON REQUEST:

- Rollers: Special bores, other colours.
- Box Quantity: According to your request.

Flange for chain guide (for roller D51, D52, D53, D45, D93, D50, D49) Type: D54

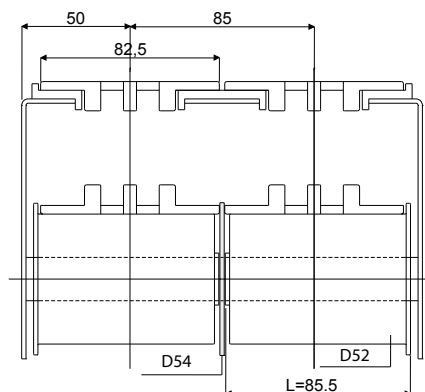
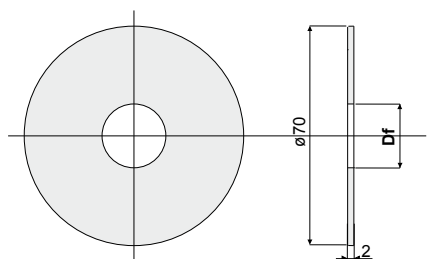


Example of application



Df Bore for pin of (mm)	Type	Code
12	D54A	CP000446
14	D54B	CP000447
15	D54C	CP000448
16	D54E	CP000449
18	D54F	CP000450
20	D54G	CP000451

Flange for chain guide (for roller D76, D71, D70) Type: D82

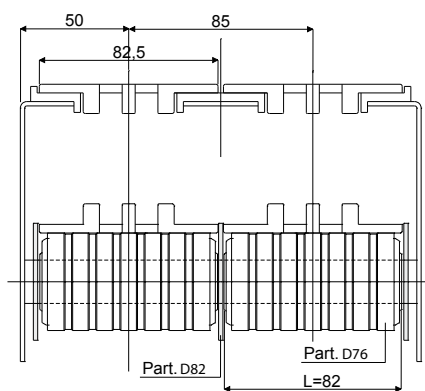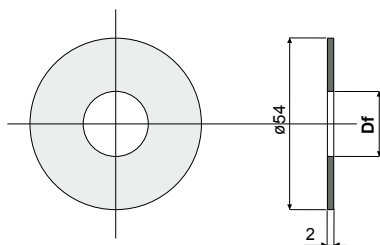

Example of application



Df Bore for pin of (mm)	Type	Code
15	D82A	CP000452
16	D82B	CP000453
18	D82C	CP000454
20	D82E	CP000455

MATERIALS: Flange is made of polypropylene black colour.


FEATURES: D54 is assembled to our roller for chain return D51, D52, D53, D45, D93, D50, D49. D82 is assembled to rollers D76, D71 and D70.

BOX QUANTITY: 96 pieces.

ON REQUEST:


- Flanges: Special bores, other colours.
- Box Quantity: According to your request.

Threaded bushings (for conveyor flanks) Type: T36

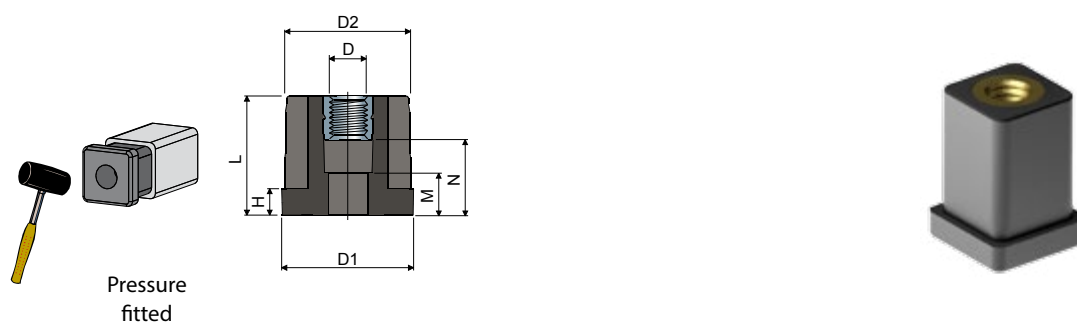


Dimensions du tube										Type	Code
Externe (mm)	Épaisseur (mm)	Interne (mm)	Filetage D	D1 (mm)	D2 (mm)	H (mm)	L (mm)	M (mm)	N (mm)		
20x20	1,5	17x17	M8	20x20	17x17	5	28	13	18	T36	CP000456

Embouts filetés (pour le côté du convoyeur) Type: T35

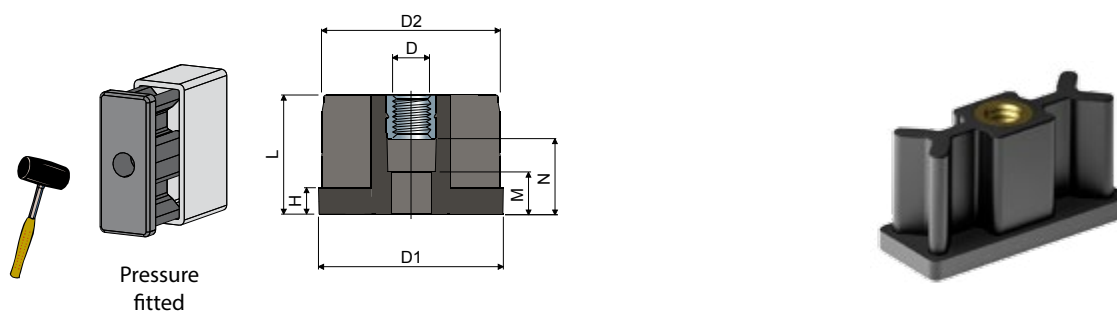

Tube dimensions										Type	Code
Outside (mm)	Thickness (mm)	Inside (mm)	Thread D	D1 (mm)	D2 (mm)	H (mm)	L (mm)	M (mm)	N (mm)		
20x50	2	16x46	M8	20x50	16x46	5	28	13	18	T35	CP000457

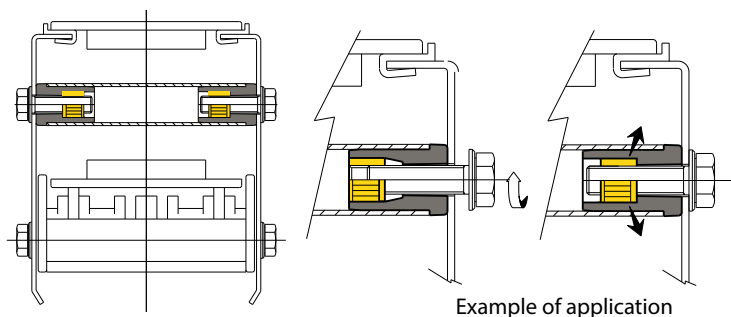

MATERIALS: Bush in reinforced polyamide black colour; threaded insert in brass.



FEATURES: Supplied assembled. To be assembled in the conveyor flanks.

BOX QUANTITY: 48 pieces.


ON REQUEST:

- Bushes: Special thickness tube.
- Box Quantity: According to your request.

Expansion plugs Type: D83

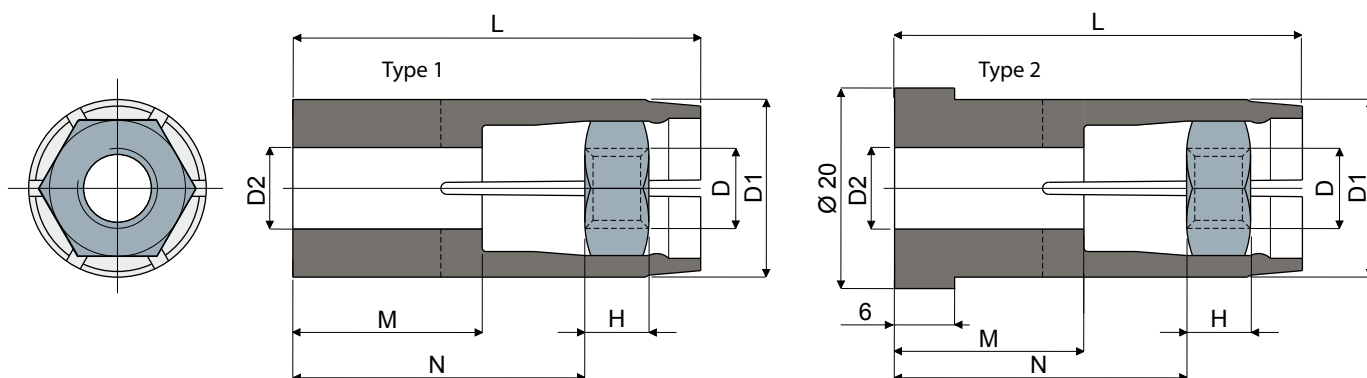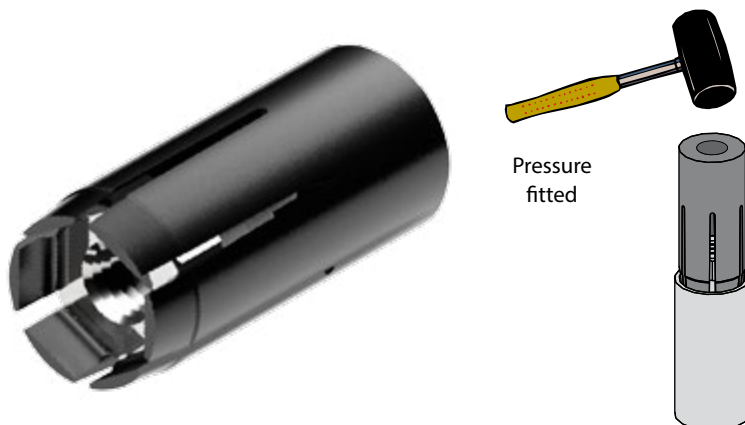

Example of application

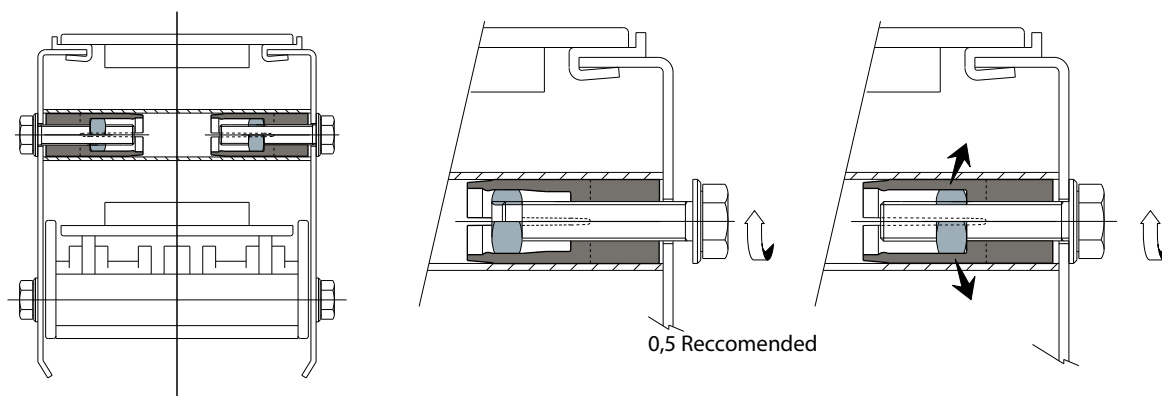

Tube dimensions										Type 1	
Outside (mm)	Thickness (mm)	Inside (mm)	D (mm)	D1 (mm)	D2 (mm)	H (mm)	L (mm)	M (mm)	N (mm)	Type	Code
20	1,5	17	M8	17	8,5	6,5	40	18	28	D83A	CP000458
25	1,5	22	M10	22	10,5	8	51	23	36	D83B	CP000459

Tube dimensions										Type 2	
Outside (mm)	Thickness (mm)	Inside (mm)	D (mm)	D1 (mm)	D2 (mm)	H (mm)	L (mm)	M (mm)	N (mm)	Type	Code
20	1,5	17	M8	17	8,5	6,5	40	19	29	D83C	CP000460

MATERIALS: Bush in reinforced polyamide black colour; threaded insert in brass.










FEATURES: Supplied assembled. To be assembled in the conveyor flanks.

BOX QUANTITY: 48 pieces.

ON REQUEST:

- Bushes: Special thickness tube.
- Box Quantity: According to your request.

Bushing for eyebolt Type: T33

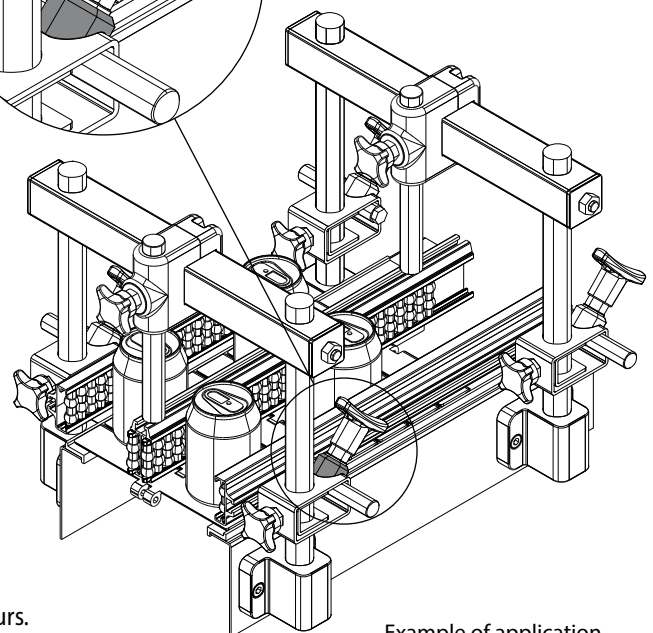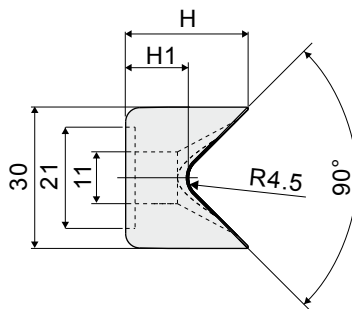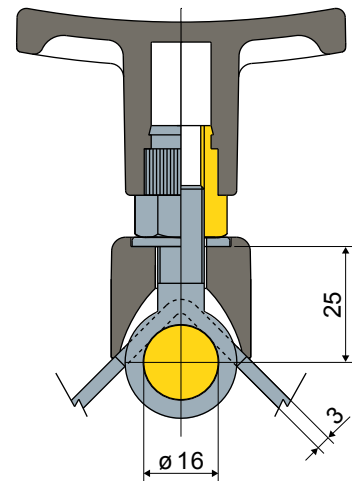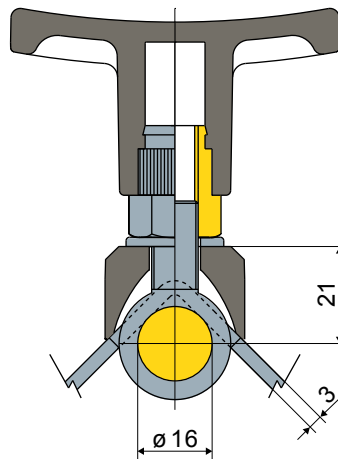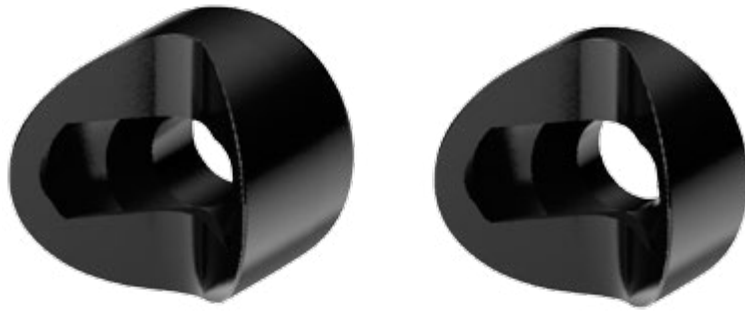

Example of application

H	H1	Low type	
(mm)	(mm)	Type	Code
20	7,3	T33A	CP000461

H	H1	High type	
(mm)	(mm)	Type	Code
26	13,3	T33B	CP000462

MATERIALS: Bushing made of reinforced polyamide black colour.


FEATURES: To be used with the eyebolts to block the pins holding the transport guides.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Bushings: With different heights, in reinforced polypropylene, other colours.
- Box Quantity: According to your request.

Bearing-holder flange Type: T00

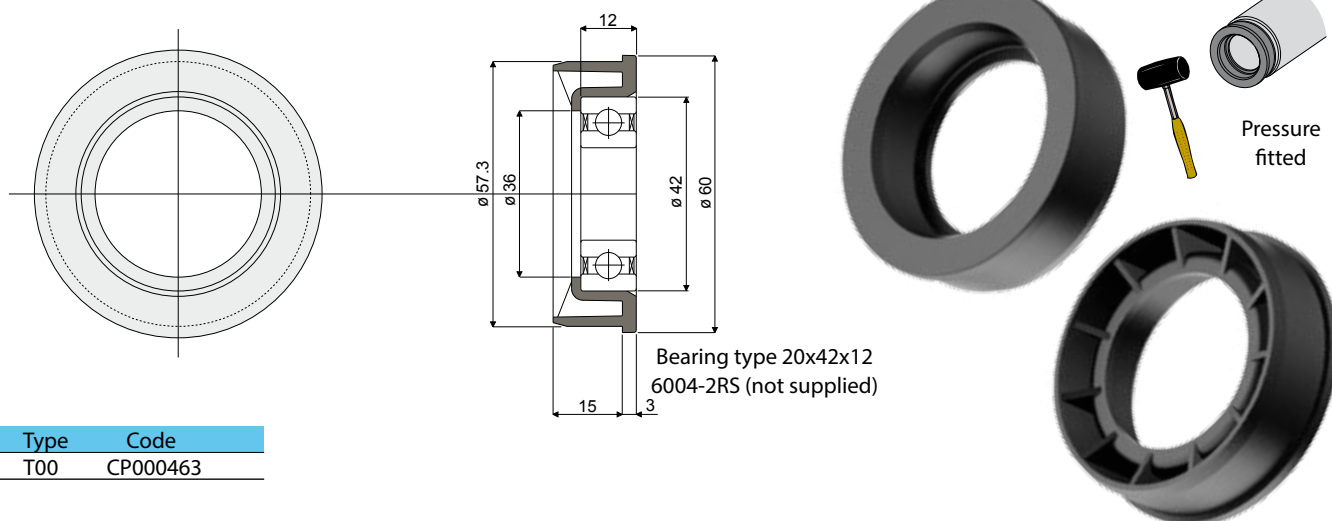

MATERIALS: Flange is made of polyamide black colour.


FEATURES: To be inserted in the tube sides $D=60,3$ thickness 1,5 mm to build a roller conveyor or rollers for chain return. Supplied without bearing.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Flanges: Supplied assembled with bearings.
- Box Quantity: According to your request.

14 teeth sprocket (for bearing support D64) Type: D65

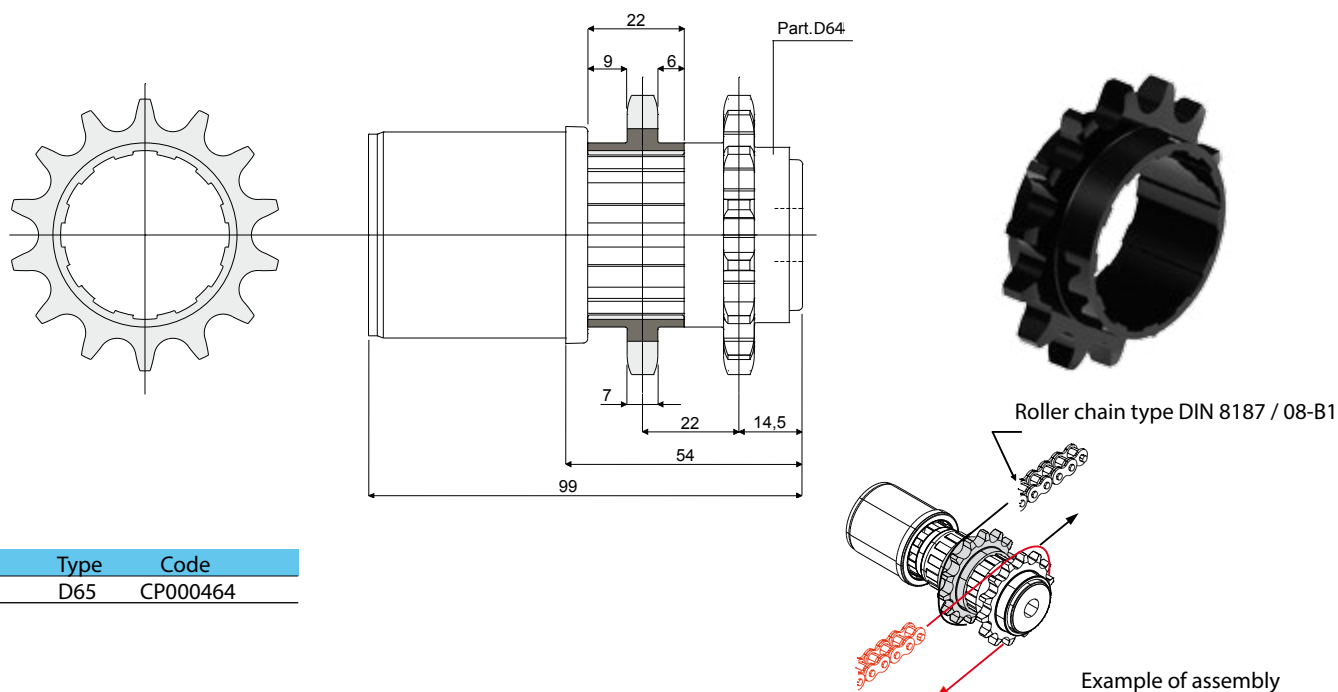

MATERIALS: Drive sprocket is made of polyamide black colour.


FEATURES: Accessory to be used with bearing support D64 to make the drive roller to roller. This drive type allows a greater torque.

BOX QUANTITY: 24 pieces.

ON REQUEST:


- Sprockets: other colours.
- Box Quantity: According to your request.

Bearing support for conveyor rollers (for idler roller) Type: D63

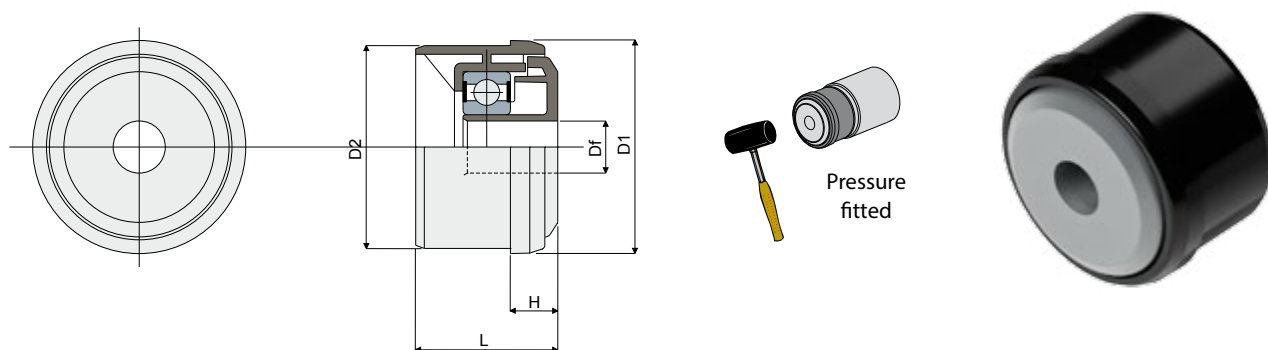

Tube dimensions							Bore for pin of	Type	Code	Bearing type
ø outside	Thickness	ø inside	D1	D2	H	L	Df			
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)			
50	1,5	47	50	47	11	30	12	D63A	CP000465	6202-2RS
50	1.5	47	50	47	11	30	14	D63B	CP000466	6202-2RS

Bearing support for conveyor rollers (with protective shield) Type: T17

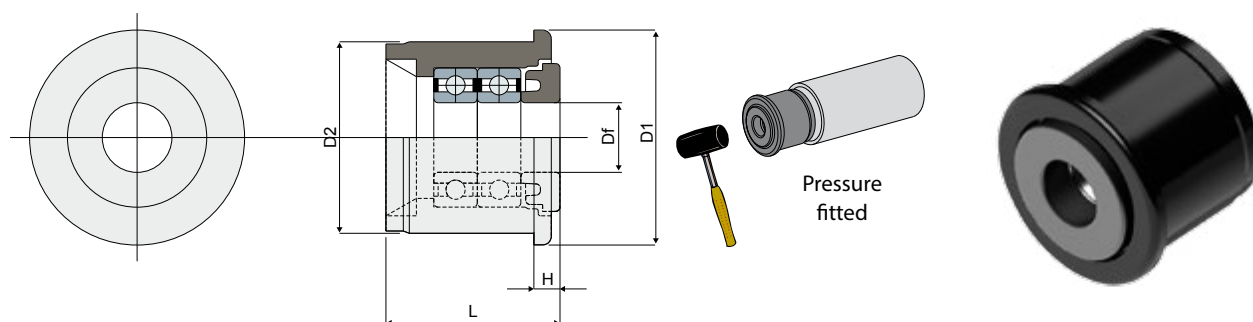

tube dimensions							Bore for pin of	Type	Code	Bearing type
ø outside	Thickness	ø inside	D1	D2	H	L	Df			
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)			
25	1,5	22	25	22	3	20	8	T17A	CP000467	688/8-2RS
25	1,5	22	25	22	3	20	8	T17B	CP000468	Fourni sans roulements

MATERIALS: Bearing support with internal part and external bushing made of polyamide black colour; bearing made of chrome steel.


FEATURES: To be inserted in the tube sides to build a roller conveyor.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Bearing supports: other colours.
- Box Quantity: According to your request.

Bearing support for conveyor rollers (for drive roller) Type: D64

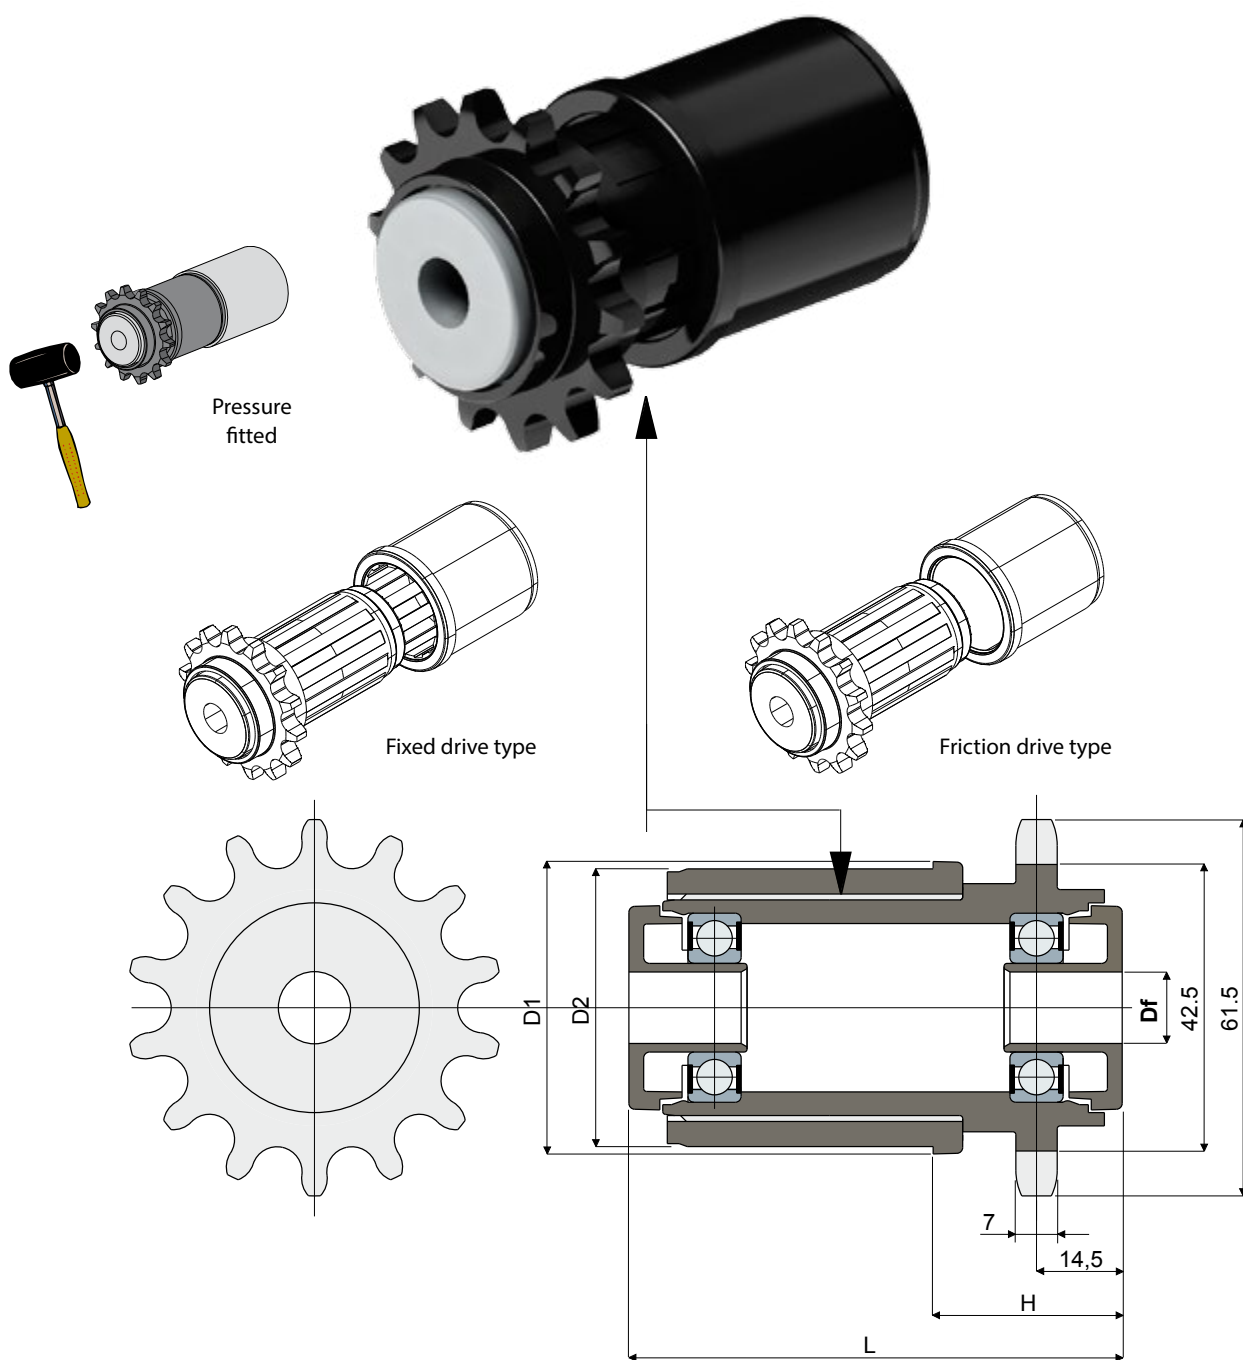

Tube dimensions							Bore for pin of Df (mm)	Fixed drive type		Friction drive type		Bearing type
ø outside (mm)	Thickness (mm)	ø inside (mm)	D1 (mm)	D2 (mm)	H (mm)	L (mm)		Type	Code	Type	Code	
50	1,5	47	50	47	32	83	12	D64A	CP000469	D64C	CP000471	6002-2RS
50	1,5	47	50	47	32	83	14	D64B	CP000470	D64D	CP000472	6002-2RS

MATERIALS: Bearing support with protective shield made of polyamide grey colour; external bushing made of polyamide black colour; bearing made of chrome steel.




FEATURES: To be inserted in the tube sides to build a roller conveyor. Drive sprocket with 14 teeth for roller chain type DIN 8187-08-b1.

BOX QUANTITY: 24 pieces.

ON REQUEST:



- Bearing supports: other colours, bores with different sizes.
- Box Quantity: According to your request.

Modular transfer plates with rollers (width 115 mm 5 rows of rollers) Type: D57

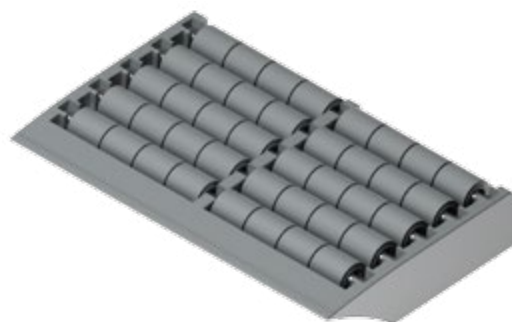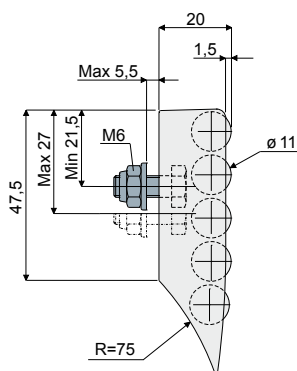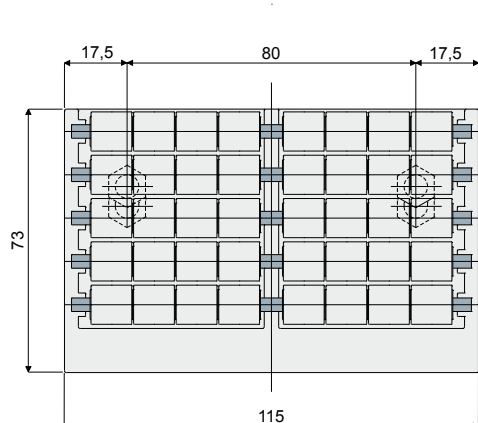



Type	Code
D57	CP000473

Modular transfer plates with rollers (width 115 mm 3 rows of rollers) Type: D58

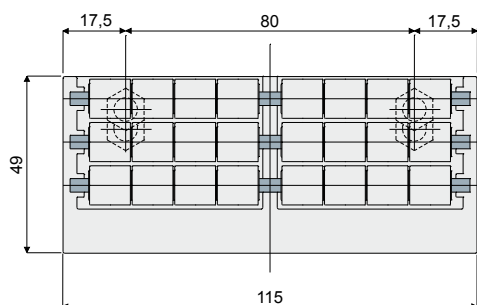

Type	Code
D58	CP000474

Modular transfer plates with rollers (width 115 mm 2 rows of rollers) Type: D59

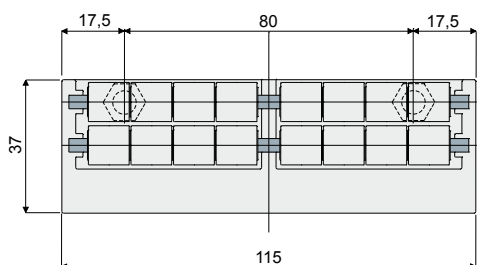

Type	Code
D59	CP000475

MATERIALS: Modular transfer plate with external module and rollers made of acetal grey colour; pins and fixing bolts and nuts made of stainless steel AISI 304.



FEATURES: To be assembled at the end of your conveyor to help the products transfer. Easy to assemble, low friction coefficient, minimum noise level, extremely cleanable.

BOX QUANTITY: 8 pieces.

ON REQUEST:



- External module and rollers: Can be produced in other colours.

Modular transfer plates with rollers (width 85 mm 5 rows of rollers) Type: D60

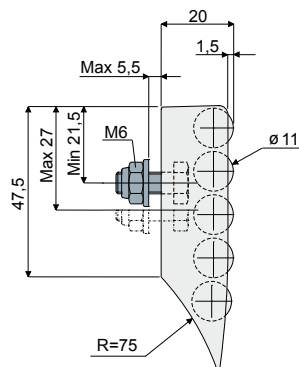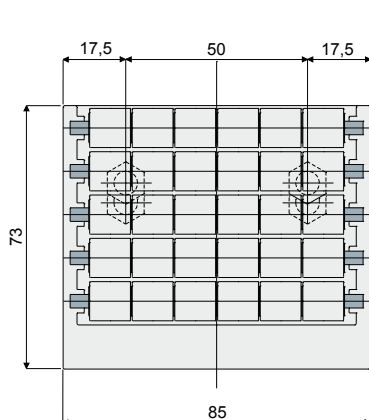



Type	Code
D60	CP000476

Modular transfer plates with rollers (width 85 mm 3 rows of rollers) Type: D61

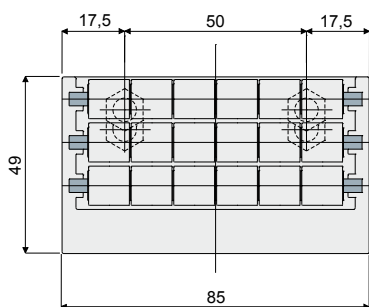

Type	Code
D61	CP000477

Modular transfer plates with rollers (width 85 mm 2 rows of rollers) Type: D62

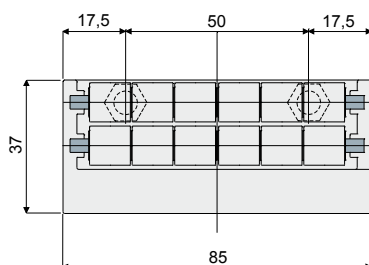

Type	Code
D62	CP000478

MATERIALS: Modular transfer plate with external module and rollers made of acetal grey colour; pins and fixing bolts and nuts made of stainless steel AISI 304.



FEATURES: To be assembled at the end of your conveyor to help the products transfer. Easy to assemble, low friction coefficient, minimum noise level, extremely cleanable.

BOX QUANTITY: 8 pieces.

ON REQUEST:

- External module and rollers: Can be produced in other colours.
- Box Quantity: According to your request.

Roller side guide (single type, with pearls) Type: T06

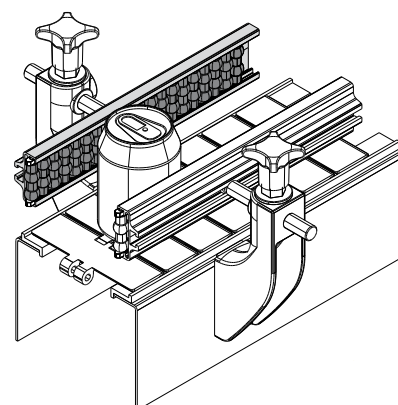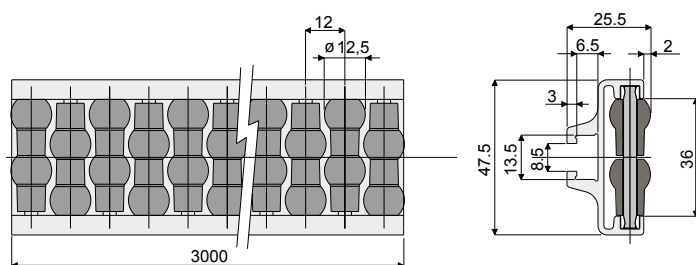

Example of application

Type	Code
T06	CP000479

MATERIALS: Roller side guide with metal profile in anodized aluminium;
rollers in polyamide grey colour; support pins in acetal resin white colour.

FEATURES: Supplied already assembled, in bars of 3 meters length.




Min. curvature radius: 250 mm.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).

ON REQUEST:

- Roller side guide: Other colours.

Roller side guide (double type, with pearls) Type: T07

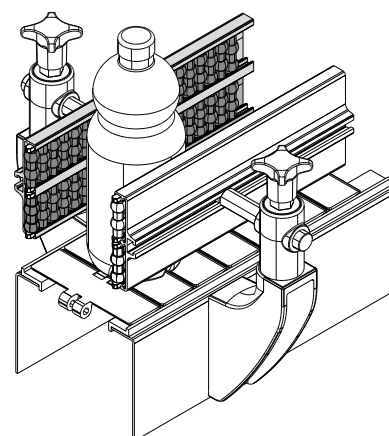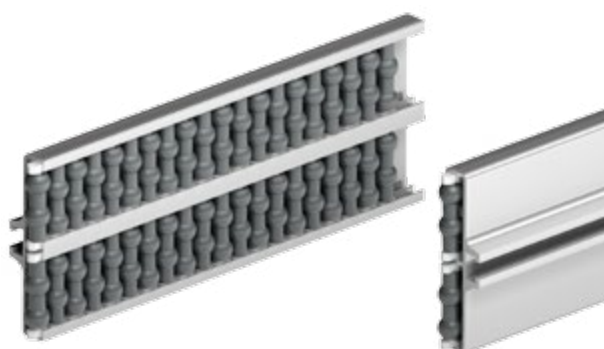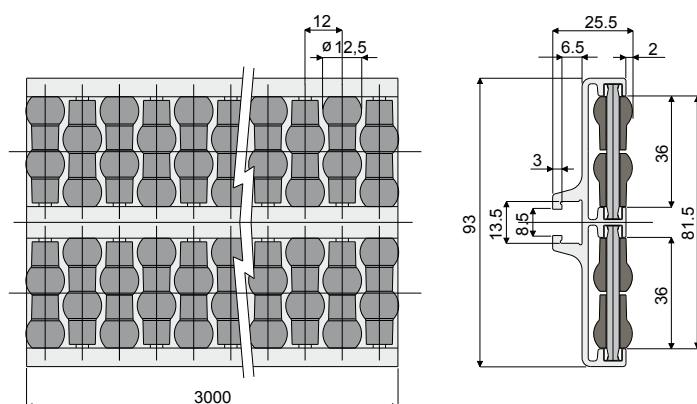

Example of application

Type	Code
T07	CP000480

MATERIALS: Roller side guide with metal profile in anodized aluminium;
rollers in polyamide grey colour; support pins in acetal resin white colour.

FEATURES: Supplied already assembled, in bars of 3 meters length.



Min. curvature radius: 500 mm.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).

ON REQUEST:

- Roller side guide: Other colours.

Roller central guide (single type, with pearls) Type: T08

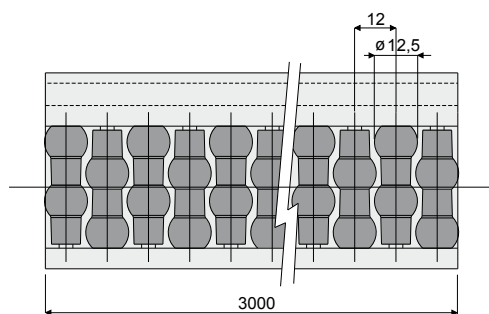

Type	Code
T08	CP000481

MATERIALS: Roller central guide with metal profile in anodized aluminium; rollers in polyamide grey colour; support pins in acetal resin white colour.


FEATURES: Supplied already assembled, in bars of 3 meters length.

Min. curvature radius: 500 mm.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).



ON REQUEST:

- Roller central guide: Other colours.

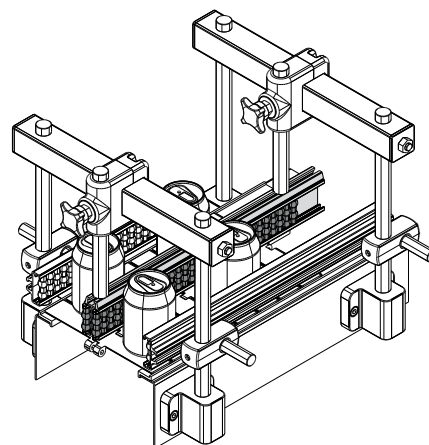

Example of application

Roller central guide (double type, with pearls) Type: T19

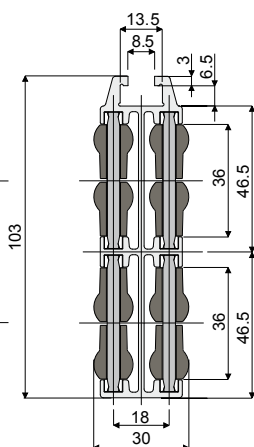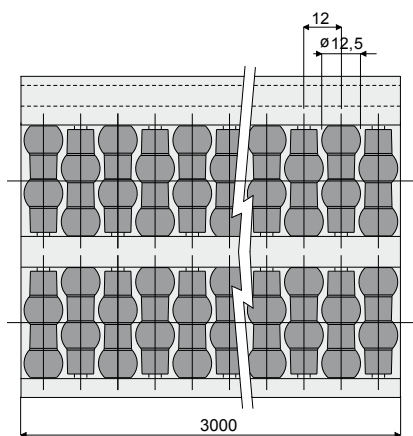

Type	Code
T19	CP000482

MATERIALS: Roller central guide with metal profile in anodized aluminium; rollers in polyamide grey colour; support pins in acetal resin white colour.


FEATURES: Supplied already assembled, in bars of 3 meters length.

Min. curvature radius: 750 mm.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).




ON REQUEST:

- Roller central guide: Other colours.

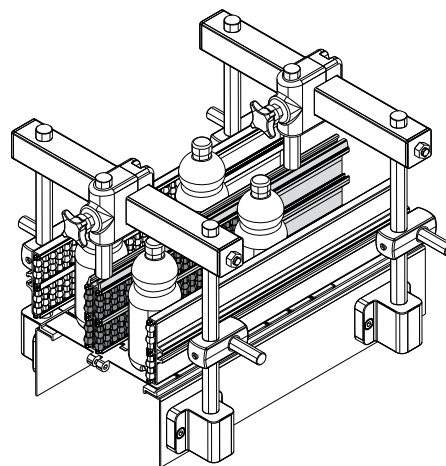

Example of application

Roller side guide (single type, with cylinders) Type: T25

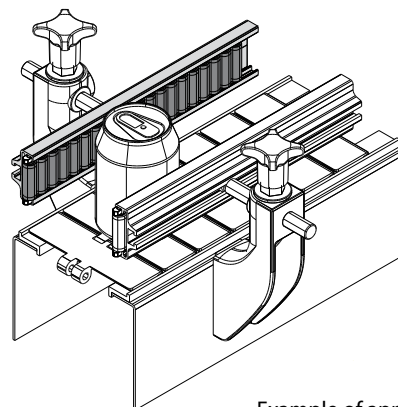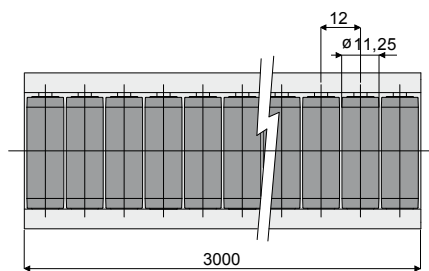

Example of application

Type	Code
T25	CP000483

MATERIALS: Roller side guide with metal profile in anodized aluminium; rollers in polyamide grey colour; support pins in acetal resin white colour.

FEATURES: Supplied already assembled, in bars of 3 meters length.




Min. curvature radius: 250 mm.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).

ON REQUEST:

- Roller side guide: Other colours.

Roller side guide (double type, with cylinders) Type: T26

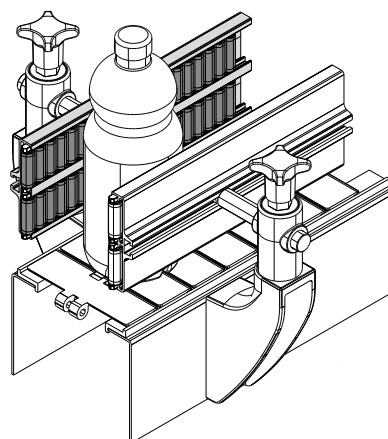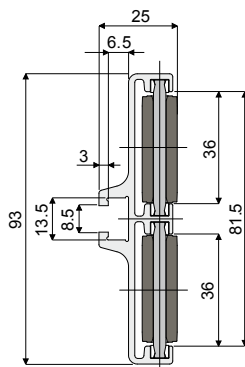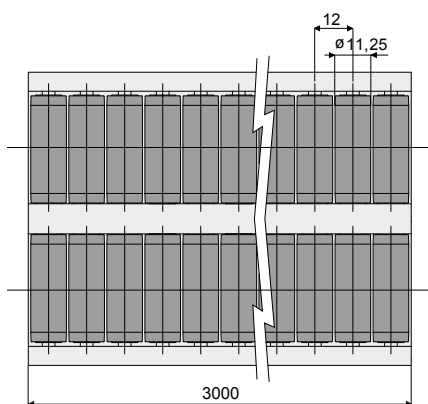

Example of application

Type	Code
T26	CP000484

MATERIALS: Roller side guide with metal profile in anodized aluminium; rollers in polyamide grey colour; support pins in acetal resin white colour.

FEATURES: Supplied already assembled, in bars of 3 meters length.



Min. curvature radius: 500 mm.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).

ON REQUEST:

- Roller side guide: Other colours

Roller central guide (single type, with cylinders) Type: T27

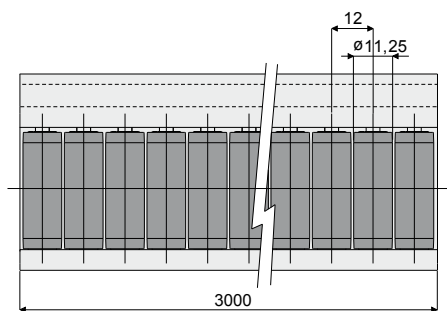

Type	Code
T27	CP000485

MATERIALS: Roller central guide with metal profile in anodized aluminium; rollers in polyamide grey colour; support pins in acetal resin white colour.


FEATURES: Supplied already assembled, in bars of 3 meters length.

Min. curvature radius: 500 mm.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).




ON REQUEST:

- Roller central guide: Other colours.

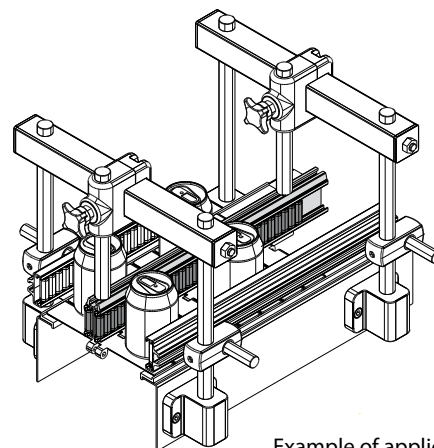

Example of application

Roller central guide (double type, with cylinders) Type: T28

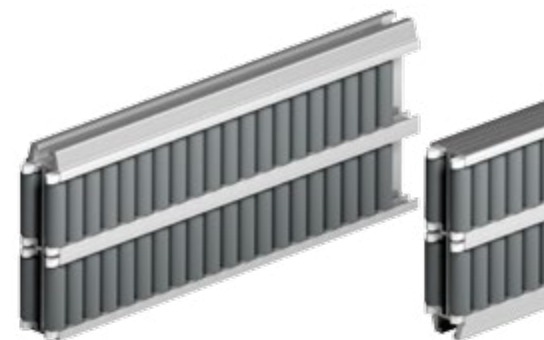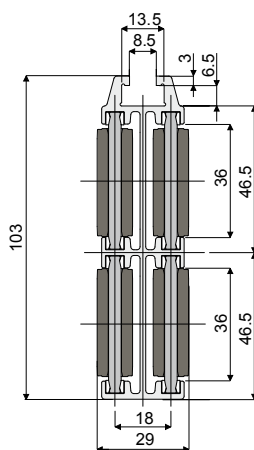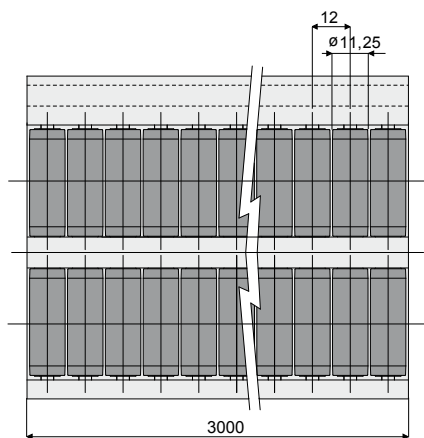

Type	Code
T28	CP000486

MATERIALS: Roller central guide with metal profile in anodized aluminium; rollers in polyamide grey colour; support pins in acetal resin white colour.


FEATURES: Supplied already assembled, in bars of 3 meters length.

Min. curvature radius: 750 mm.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).



ON REQUEST:

- Roller central guide: Other colours.

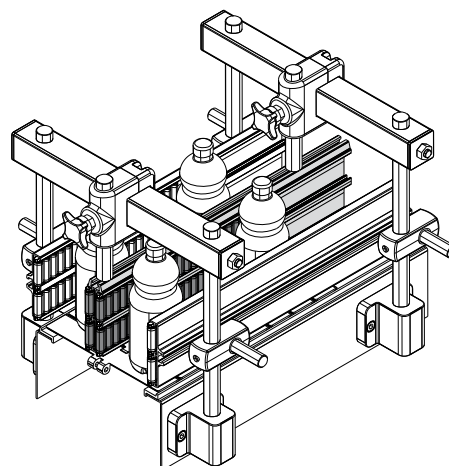

Example of application

Roller side guides (single type, with small cylinders) Type: T55

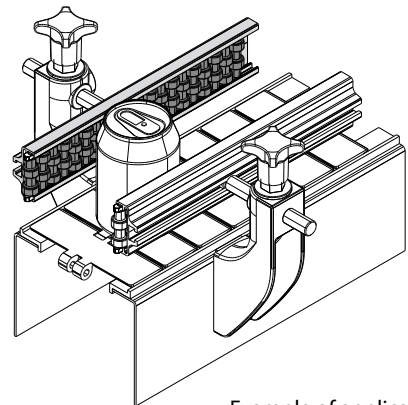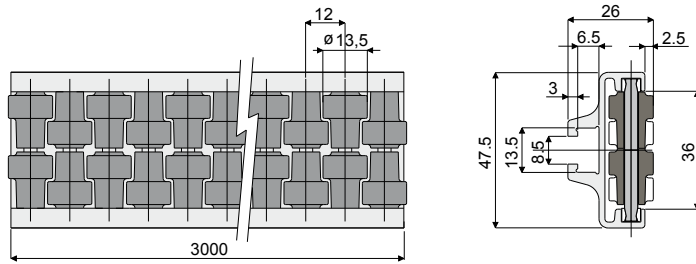

Example of application

Type	Code
T55	CP000487

MATERIALS: Roller side guide with metal profile in anodized aluminium;
rollers in polyamide grey colour; support pins in acetal resin white colour.

FEATURES: Supplied already assembled, in bars of 3 meters length.




Min. curvature radius: 250 mm.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).

ON REQUEST:

- Roller side guide: Other colours.

Roller side guides (double type, with small cylinders) Type: T56

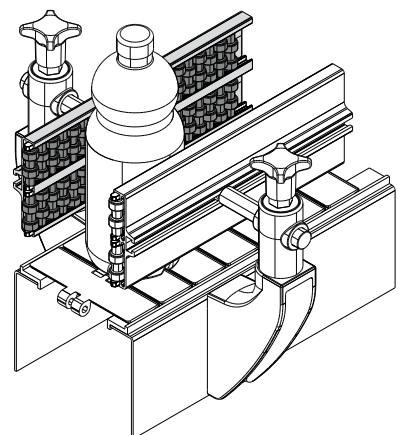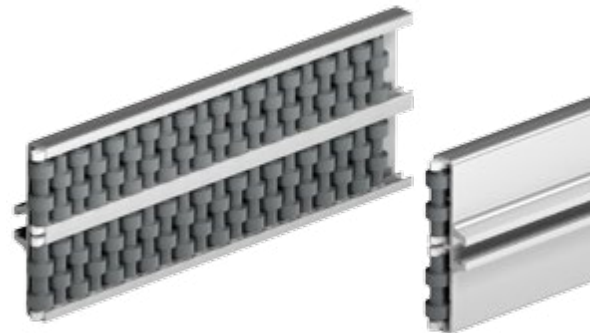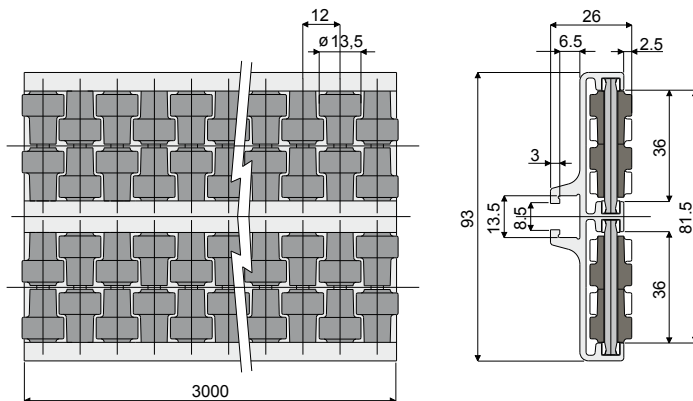

Example of application

Type	Code
T56	CP000488

MATERIALS: Roller side guide with metal profile in anodized aluminium;
rollers in polyamide grey colour; support pins in acetal resin white colour.

FEATURES: Supplied already assembled, in bars of 3 meters length.



Min. curvature radius: 500 mm.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).

ON REQUEST:

- Roller side guide: Other colours.

Roller central guides (single type, with small cylinders) Type: T57

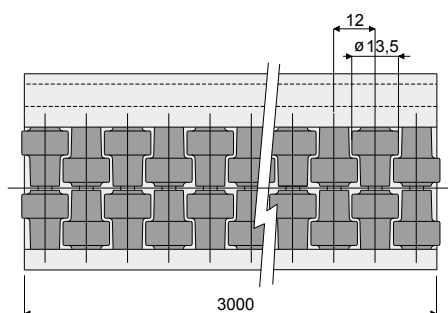

Type	Code
T57	CP000489

MATERIALS: Roller side guide with metal profile in anodized aluminium; rollers in polyamide grey colour; support pins in acetal resin white colour.


FEATURES: Supplied already assembled, in bars of 3 meters length.

Min. curvature radius: 500 mm.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).



ON REQUEST:

- Roller side guide: Other colours.

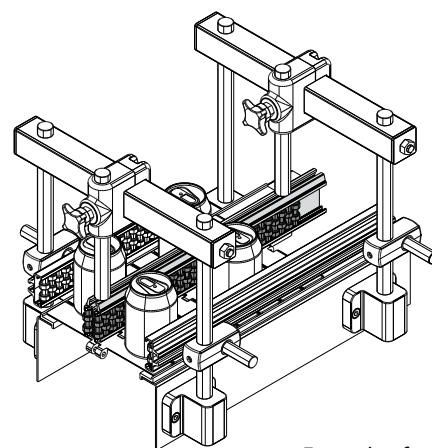

Example of application

Roller central guides (double type, with small cylinders) Type: T58

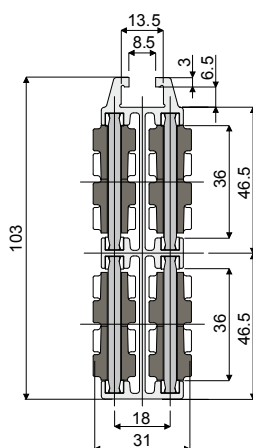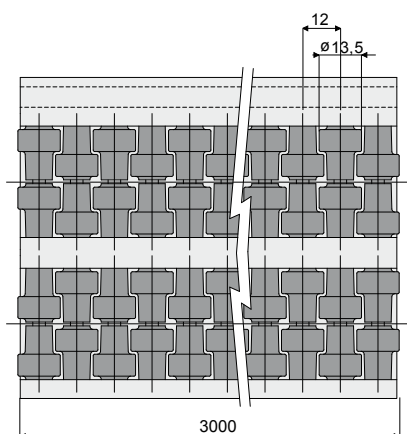

Type	Code
T58	CP000490

MATERIALS: Roller side guide with metal profile in anodized aluminium; rollers in polyamide grey colour; support pins in acetal resin white colour.


FEATURES: Supplied already assembled, in bars of 3 meters length.

Min. curvature radius: 750 mm.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).



ON REQUEST:

- Roller side guide: Other colours.

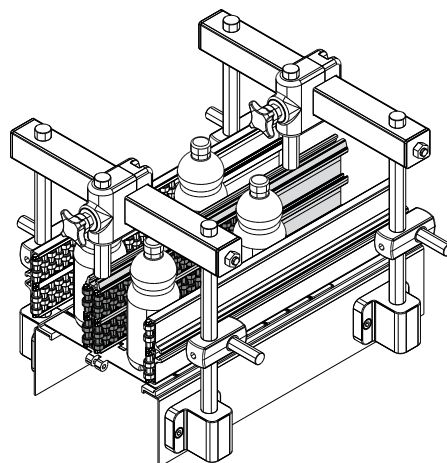

Example of application

Profiles for guides Type: T20, T21, T22 e T23

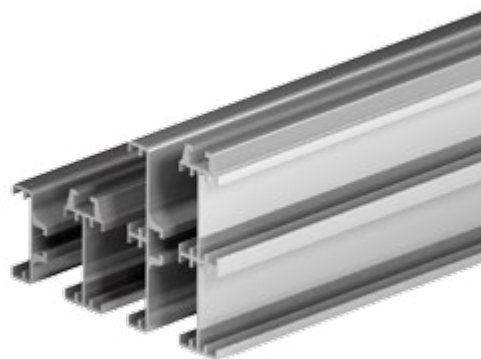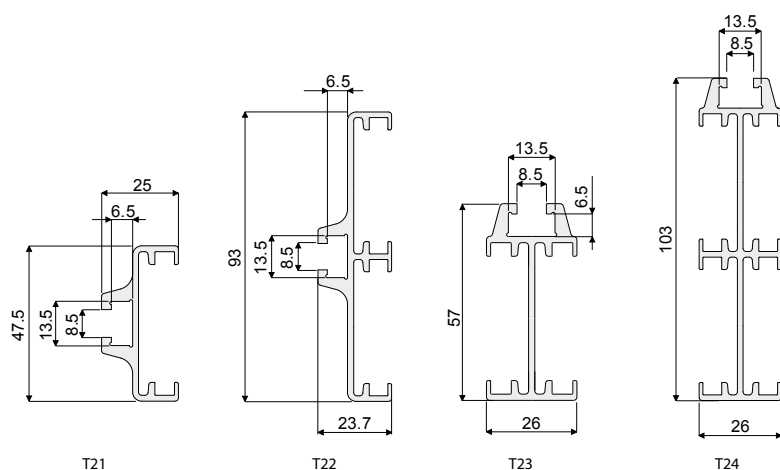

Type	Version	Type	Code	Length
Side	Single	T20	CP000491	3000
	Double	T21	CP000492	3000
Central	Single	T22	CP000493	3000
	Double	T23	CP000494	3000




MATERIALS: Metal profile in anodized aluminium.

FEATURES: Supplied in bars of 3 meters length.

To be used with roller guides T06, T07, T08, T19, T25, T26, T27, T28.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).

Separation block for roller side guide (single type) Type: T40

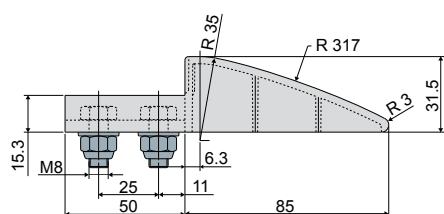

Example of application



Type	Code
T40	CP000495

MATERIALS: Separation block is made of polyethylene, grey colour; bolts and nuts in stainless steel AISI 304.


FEATURES: Supplied complete with bolts and nuts.

To be used at the end of the roller side guides, to help the arrival of the products.

BOX QUANTITY: 8 pieces.



ON REQUEST:

- Separation blocks: Other colours.
- Box Quantity: According to your request

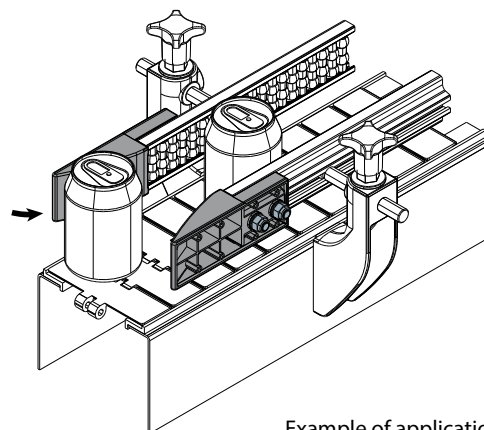

Example of application

Separation block for roller central guide (single type) Type: T41

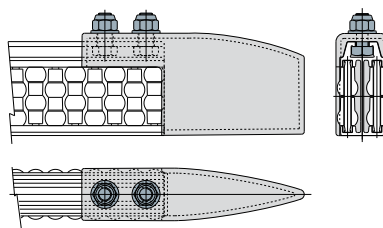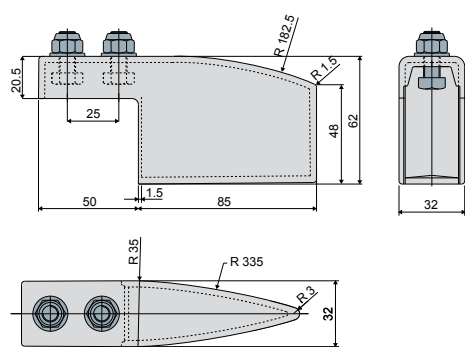

Example of application



Type	Code
T41	CP000496


MATERIALS: Separation block is made of polyethylene, grey colour; bolts and nuts in stainless steel AISI 304.

FEATURES: Supplied complete with bolts and nuts. To be used at the end of the roller side guides, to help the arrival of the products.

BOX QUANTITY: 8 pieces.




ON REQUEST:

- Separation blocks: Other colours.
- Box Quantity: According to your request.

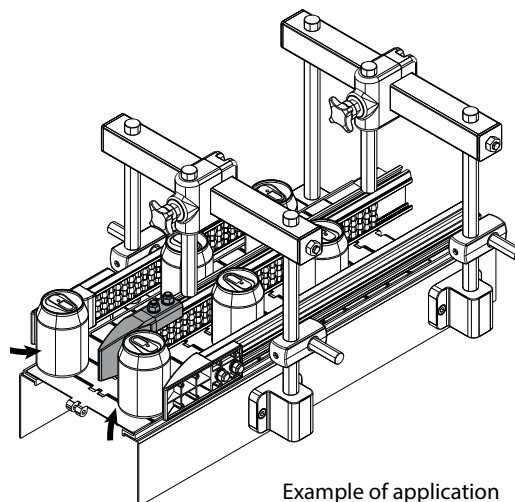

Example of application

Separation block for roller side guide (double type) Type: T42

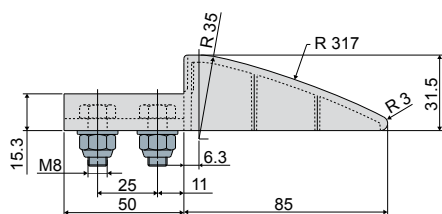

Example of application



Type	Code
T42	CP000497


MATERIALS: Separation block is made of polyethylene, grey colour; bolts and nuts in stainless steel AISI 304.

FEATURES: Supplied complete with bolts and nuts. To be used at the end of the roller side guides, to help the arrival of the products.

BOX QUANTITY: 8 pieces.




ON REQUEST:

- Separation blocks: Other colours.
- Box Quantity: According to your request

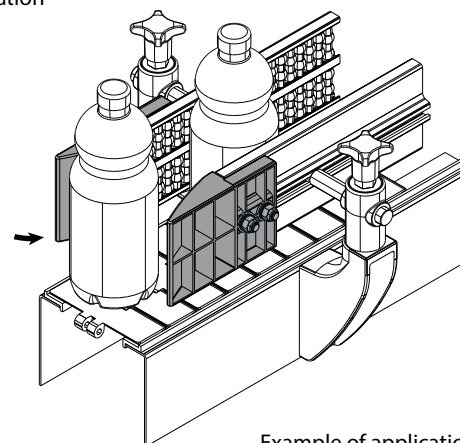


Example of application

Separation block for roller central guide (double type) Type: T43

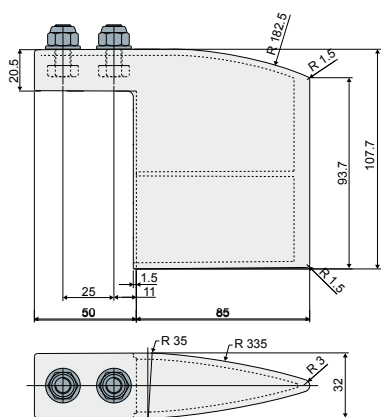

Example of application

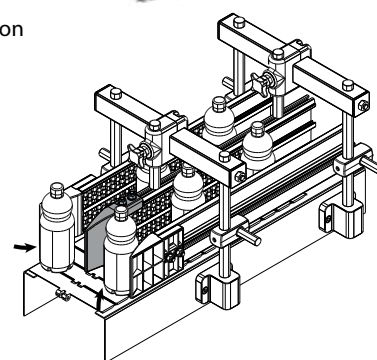



Type	Code
T43	CP000498

MATERIALS: Separation block is made of polyethylene, grey colour; bolts and nuts in stainless steel AISI 304.
FEATURES: Supplied complete with bolts and nuts. To be used at the end of the roller side guides, to help the arrival of the products. **BOX QUANTITY:** 8 pieces.
ON REQUEST: • Separation blocks: Other colours. • Box Quantity: According to your request

Guide profile for products Type: T29



Type	Code
T29	CP000499

MATERIALS: Profile made of natural polyethylene white colour.
FEATURES: Supplied in bars of 3 meters length. To be used with side guides T20, T21, T22, T23.
BOX QUANTITY: 2 bars of 3 meters (total 6 meters).
ON REQUEST: • Box Quantity: According to your request.

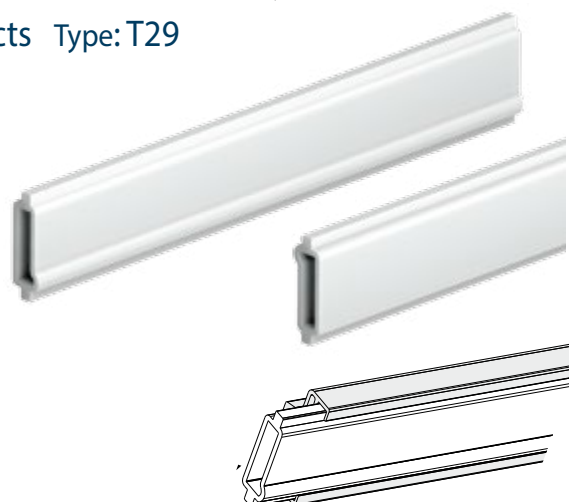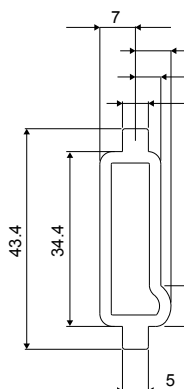


Example of application

Guide rail (with metal profile) Type: T53

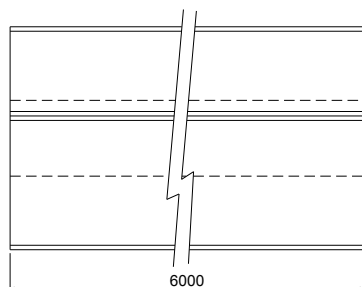


Type	Code
T53	CP000500

MATERIALS: Plastic profile in polyethylene natural colour; metal profile in stainless steel AISI 304.
FEATURES: Supplied already assembled in lengths of 6 meters.
BOX QUANTITY: 2 bars of 6 meters (total 12 meters).
ON REQUEST:



Example of application

Guide rail (round, with metal profile) Type: T54

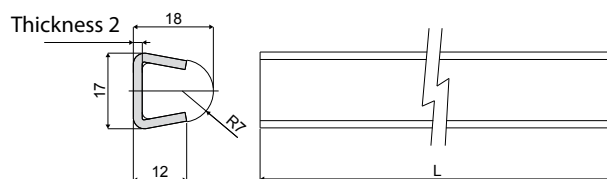

Type	Code	L
T54A	CP000501	6000
T54B	CP000502	3000


MATERIALS: Plastic profile in polyethylene natural colour;
metal profile in stainless steel AISI 304.

FEATURES: Supplied already assembled in lengths of 3 or 6 meters.

BOX QUANTITY: 2 bars of 6 mts. (total 12 mts.), or 2 bars of 3 mts. (total 6 mts.).



ON REQUEST:

- Box Quantity: According to your request.

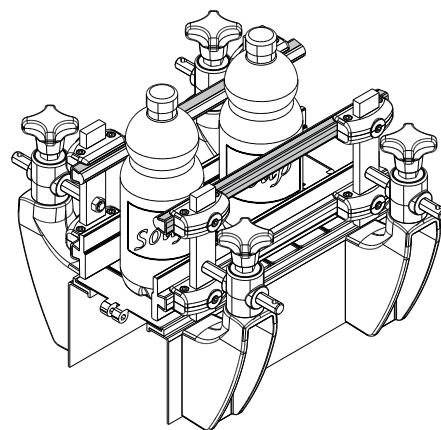


Example of application

Connecting bar for roller guides Type: T18



Type	Code
T18	CP000503

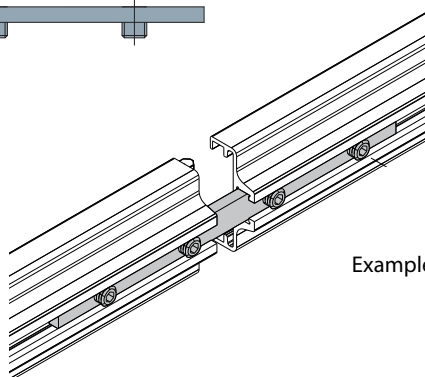

Example of application

MATERIALS: Bar is made of zinc plated steel supplied with 4 screws M8x10.




FEATURES: To be used for connecting the metal profiles of T06, T07, T08, T19, T25, T26, T27, T28, T20, T21, T22, T23.

BOX QUANTITY: 8 pieces.

ON REQUEST:

- Box Quantity: According to your request.

Roller side guide (375 mm modules, with cylinders) Type: T39

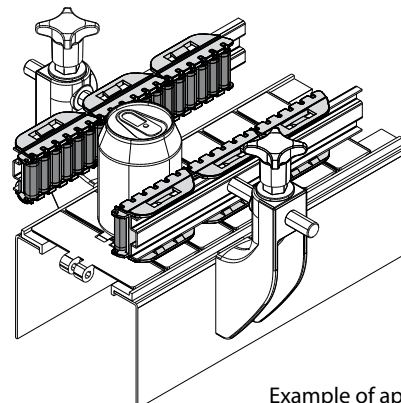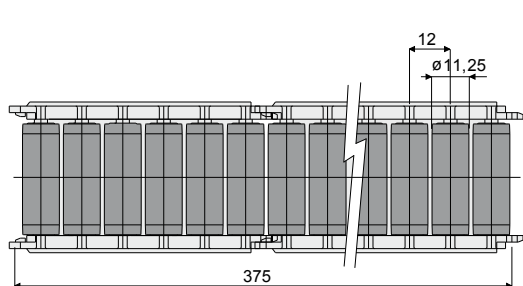

Example of application




Type	Code
T39	CP000504

MATERIALS: Rollers in polyamide grey colour;
support pins and modules in acetal resin black colour.
FEATURES: Supplied already assembled, in modules of 375 mm length, for 40x8 mm plate.
Min. curvature radius: ext = 500 mm; int. = 350 mm.
BOX QUANTITY: 12 pieces.

ON REQUEST:

- Module and rollers: Can be produced in other colours.
- Box Quantity: According to your request.

Roller side guide (375 mm modules with small cylinders) Type: T44

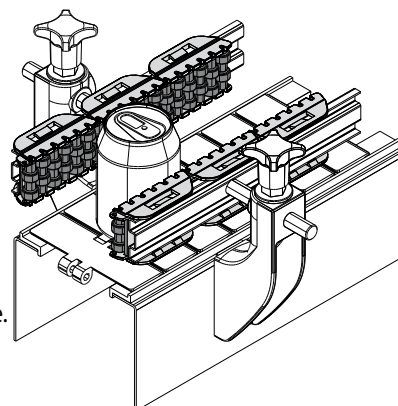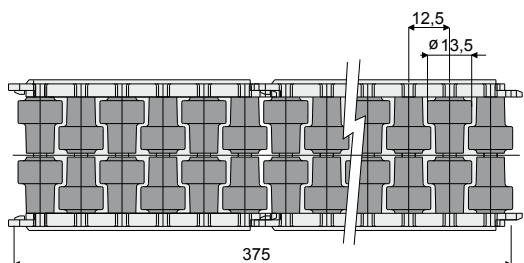

Example of application



Type	Code
T44	CP000505

MATERIALS: Rollers in polyamide grey colour;
support pins and modules in acetal resin black colour.
FEATURES: Supplied already assembled, in modules of 375 mm length, for 40x8 mm plate.
Min. curvature radius: ext = 500 mm; int. = 350 mm.
BOX QUANTITY: 12 pieces.

ON REQUEST:

- Module and rollers: can be produced in other colours
- Box quantity: According to your request.

Roller side guide (375 mm modules with pearls) Type: T45

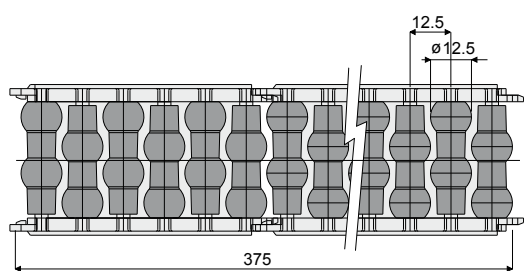

Type	Code
T45	CP000506


MATERIALS: Rollers in polyamide grey colour; support pins and modules in acetal resin black colour.

FEATURES: Supplied already assembled, in modules of 375 mm length, for 40x8 mm plate. Min. curvature radius: ext = 500 mm; int. = 350 mm.

BOX QUANTITY: 12 pieces.



ON REQUEST:

- Module and rollers: can be produced in other colours
- Box quantity: According to your request.

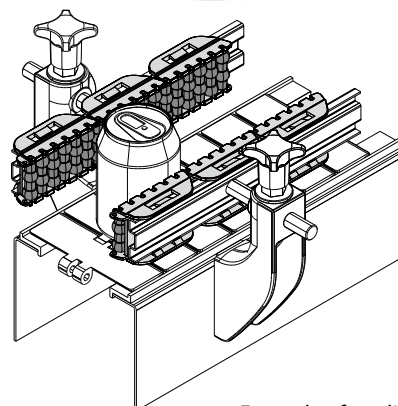


Example of application

Profiles for side guides Type: T30

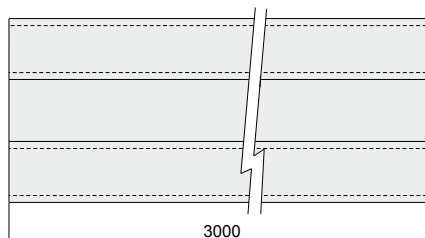

Stainless steel AISI 430		Stainless steel AISI 304	
Type	Code	Type	Code
T30	CP000507	TX30	CP000508



Example of application


MATERIALS: Profiles in stainless steel AISI 430 or AISI 304.

FEATURES: Supplied in bars of 3 meters length. To be used with side guide T39.

BOX QUANTITY: 2 bars of 3 meters (total 6 meters).



ON REQUEST:

- Box Quantity: According to your request.

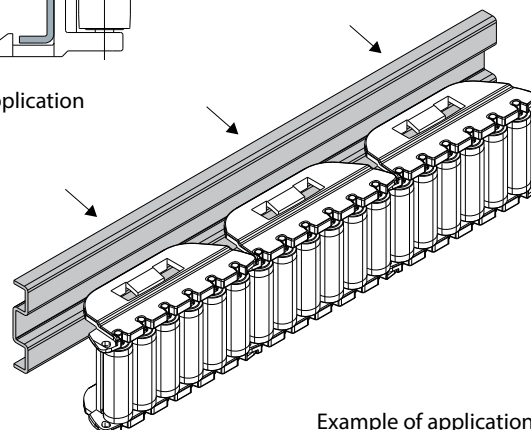

Example of application

Shoe for chain return (for raised rib chains) Type: T59

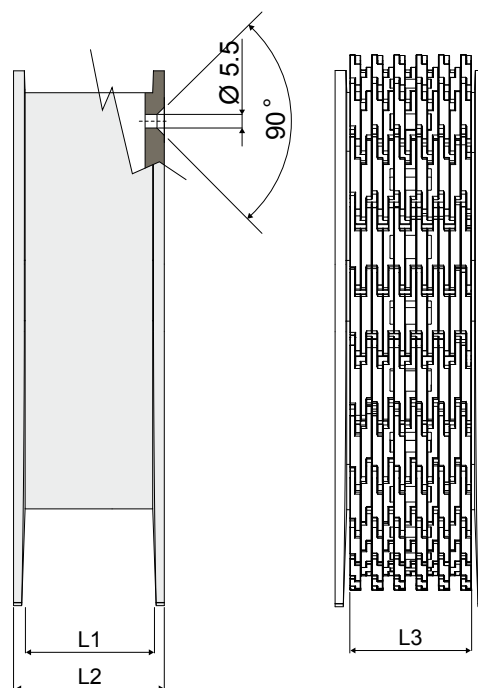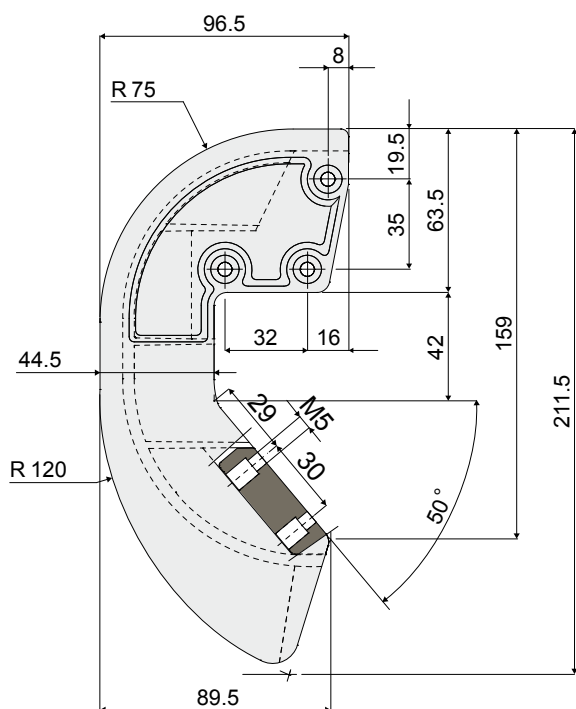

Type	Code	L1	L2	L3 (Chain width)
T59A	CP000509	41	50	38.5
T59B	CP000510	49	58.5	47


MATERIALS: Shoe in black polyethylene;
screws in stainless steel AISI 304.

FEATURES: Supplied complete with screws.
To be used in the idler part of the conveyor.

BOX QUANTITY: 8 pieces.



ON REQUEST:

- Shoes: Other colours.
- Box Quantity: According to your request

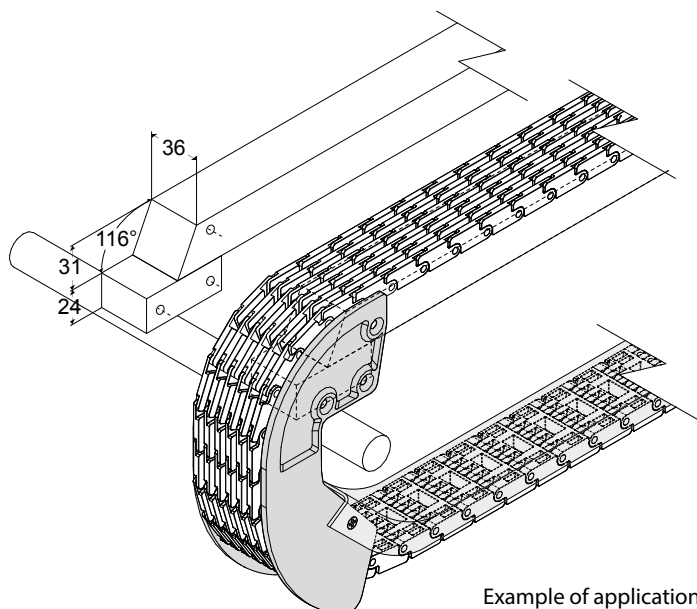

Example of application

Scanning lever Type: T60

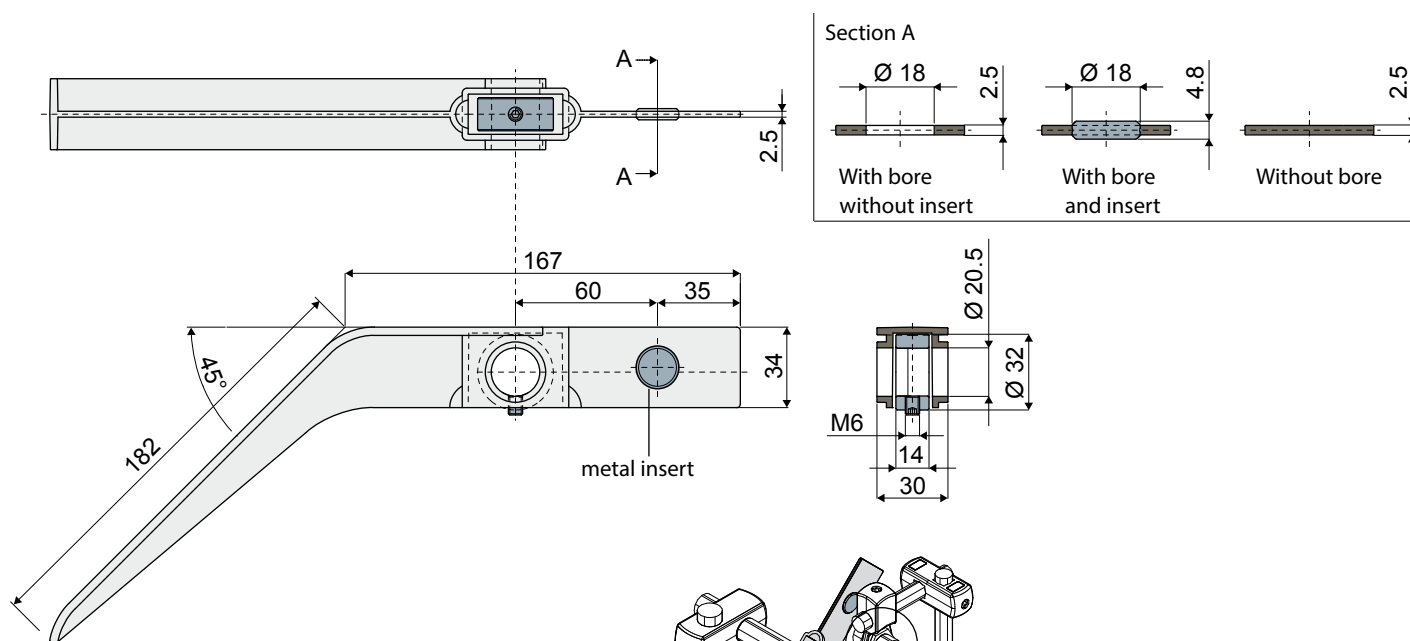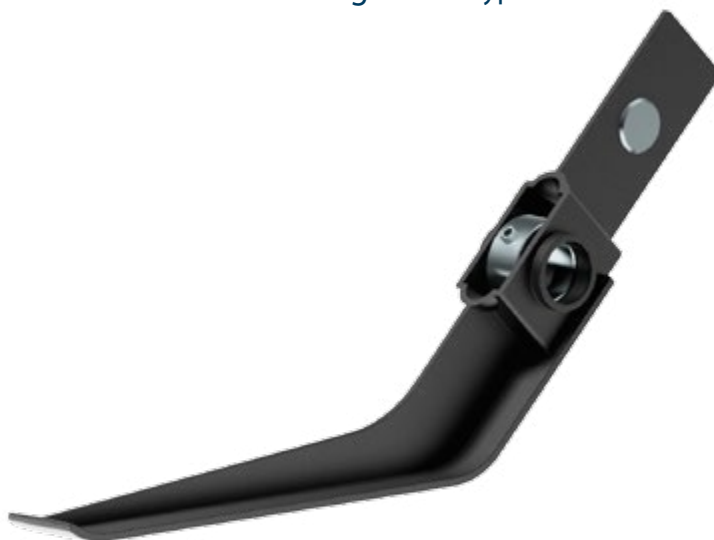

Without bore		With bore, without sensor insert		With bore and sensor insert	
Type	Code	Type	Code	Type	Code
T60A	CP000511	T60B	CP000512	T60C	CP000513

MATERIALS: Scanning lever in reinforced Polyamide black colour; grain and collar in zinc-plated steel.


FEATURES: Supplied assembled.

To be used in the surveying of the packaged products, to help the arrival of the products.



BOX QUANTITY: 24 pieces.

ON REQUEST:





- Scanning lever: Other colours.
- Box Quantity: According to your request.

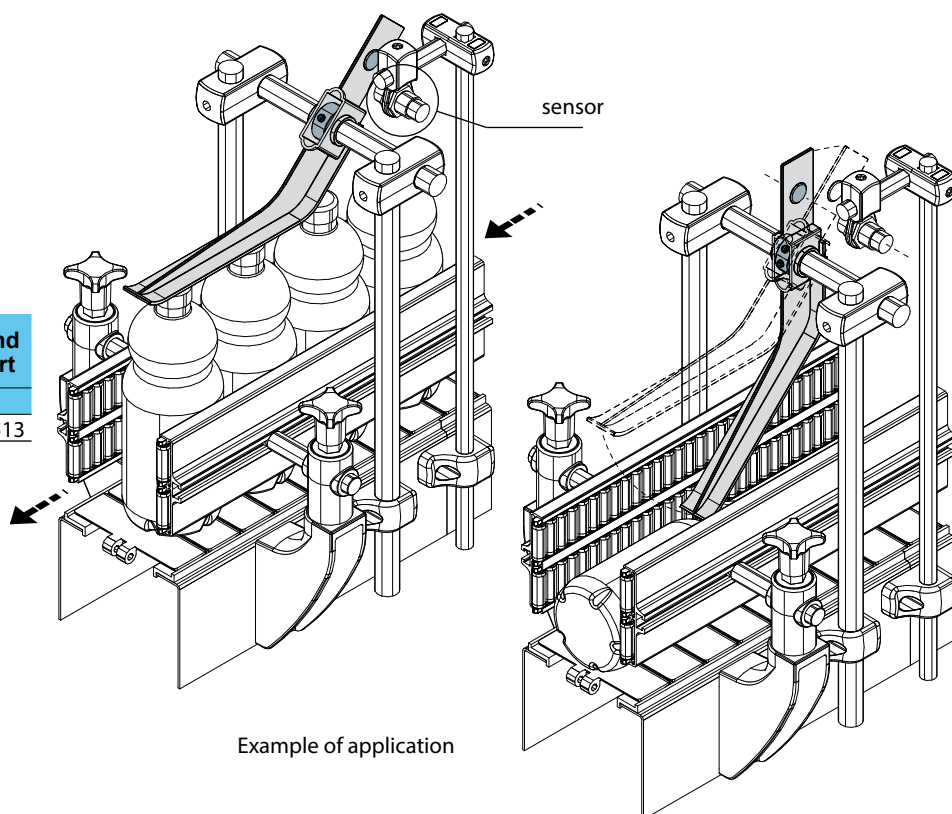

Spacer for guide rail pin Type: T52

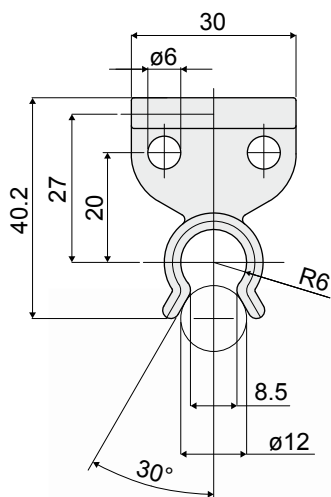

Example of application

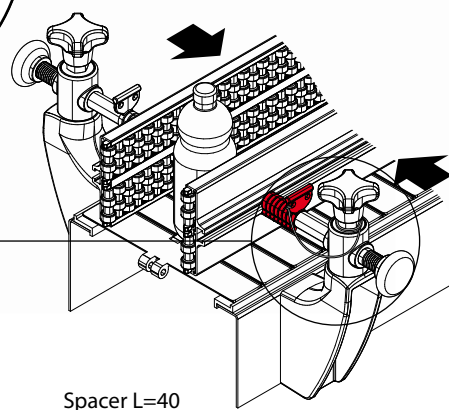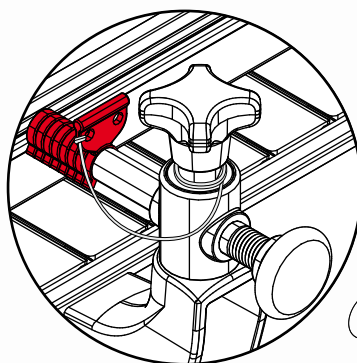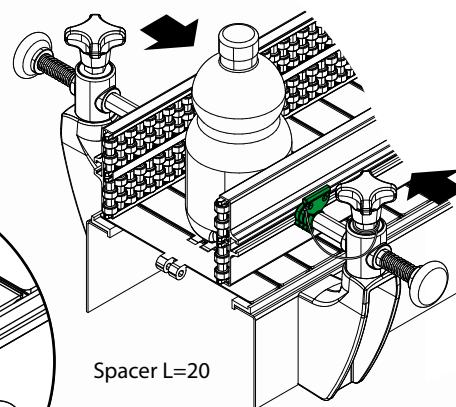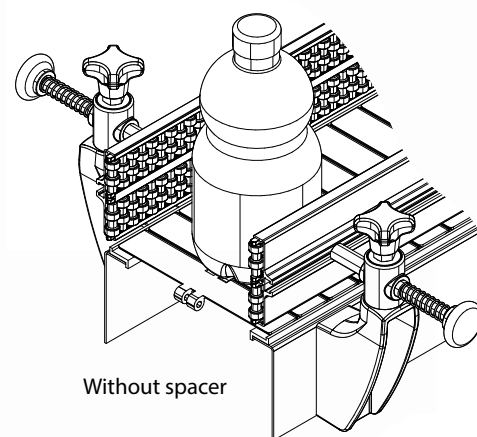

L	Couleur	Type	Code
5	Blanc RAL 9001	T52A	CP000514
10	Rouge RAL 3000	T52B	CP000515
15	Noir RAL 9005	T52C	CP000516
20	Vert RAL 6029	T52D	CP000517
25	Jaune RAL 1021	T52E	CP000518
30	Orange RAL 2004	T52F	CP000519
35	Bleu RAL 5015	T52G	CP000520
40	Blanc RAL 9001	T52H	CP000521
	Rouge RAL 3000	T52I	CP000522
	Noir RAL 9005	T52L	CP000523
	Vert RAL 6029	T52M	CP000524
	Jaune RAL 1021	T52N	CP000525
	Orange RAL 2004	T52O	CP000526
	Bleu RAL 5015	T52P	CP000527
	Gris RAL 7035	T52Q	CP000528

MATERIALS: Spacer in polypropylene.

FEATURES: To be used to adjust the distance between the side guides.


Snap-on assembly. Available in different lengths and colours.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Spacers: Other colours.
- Box Quantity: according to your request.

Reference peg for size changing Type: T31

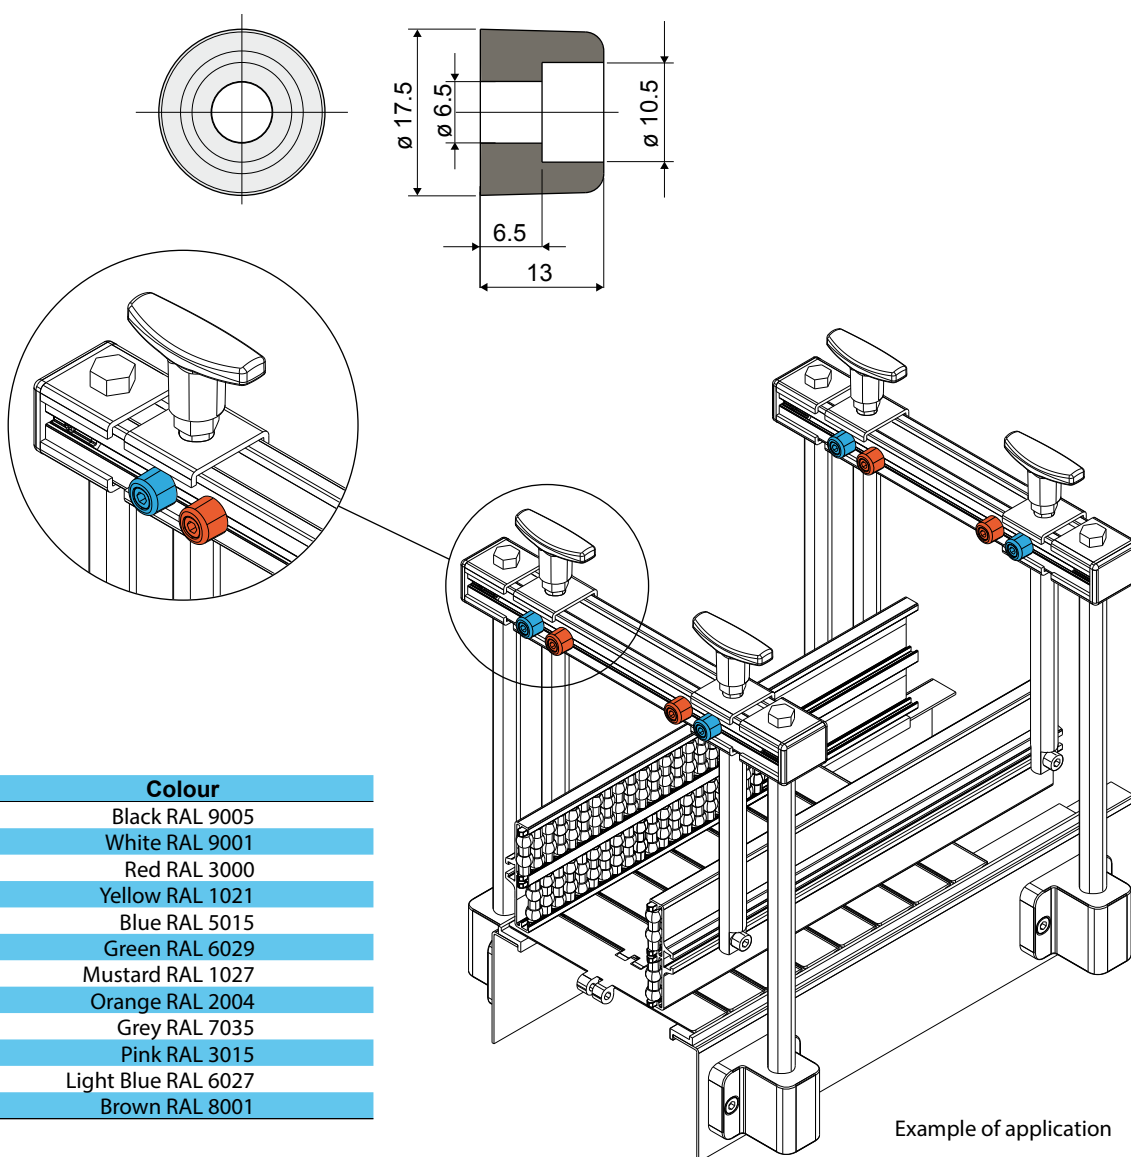

Type	Code	Colour
T31A	CP000529	Black RAL 9005
T31B	CP000530	White RAL 9001
T31C	CP000531	Red RAL 3000
T31D	CP000532	Yellow RAL 1021
T31E	CP000533	Blue RAL 5015
T31F	CP000534	Green RAL 6029
T31G	CP000535	Mustard RAL 1027
T31H	CP000536	Orange RAL 2004
T31I	CP000537	Grey RAL 7035
T31L	CP000538	Pink RAL 3015
T31M	CP000539	Light Blue RAL 6027
T31N	CP000540	Brown RAL 8001

MATERIALS: Peg in reinforced polypropylene.

FEATURES: To be used as a reference on the transport guides for size changing.




BOX QUANTITY: 96 pieces.

ON REQUEST:

- Pegs: Can be produced in other colours.
- Box Quantity: According to your request.

Example of application

Reducer for racks (for the cross adjustment of the side guides) Type: D99

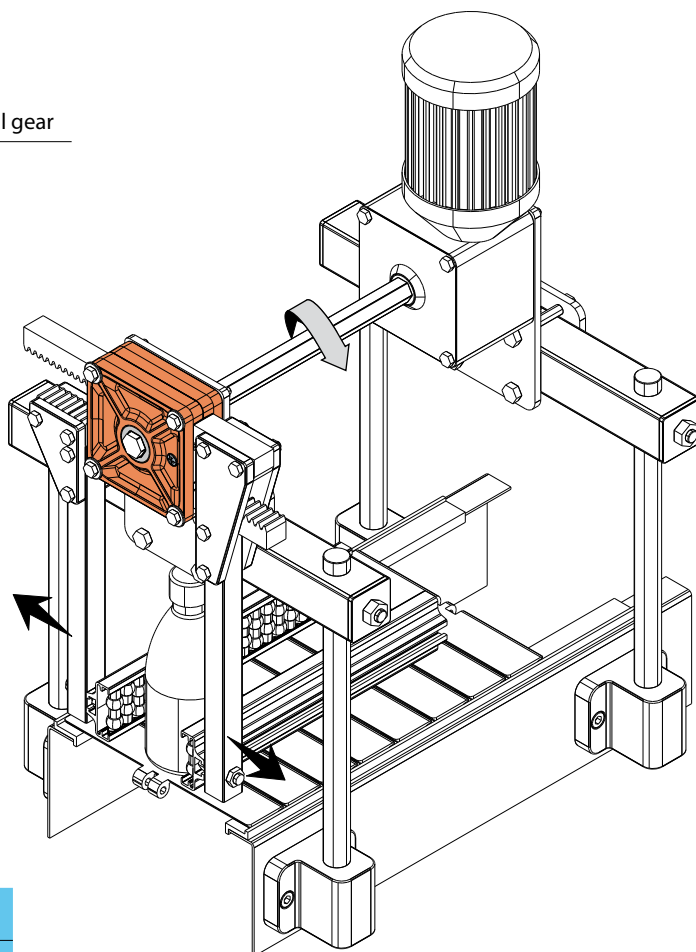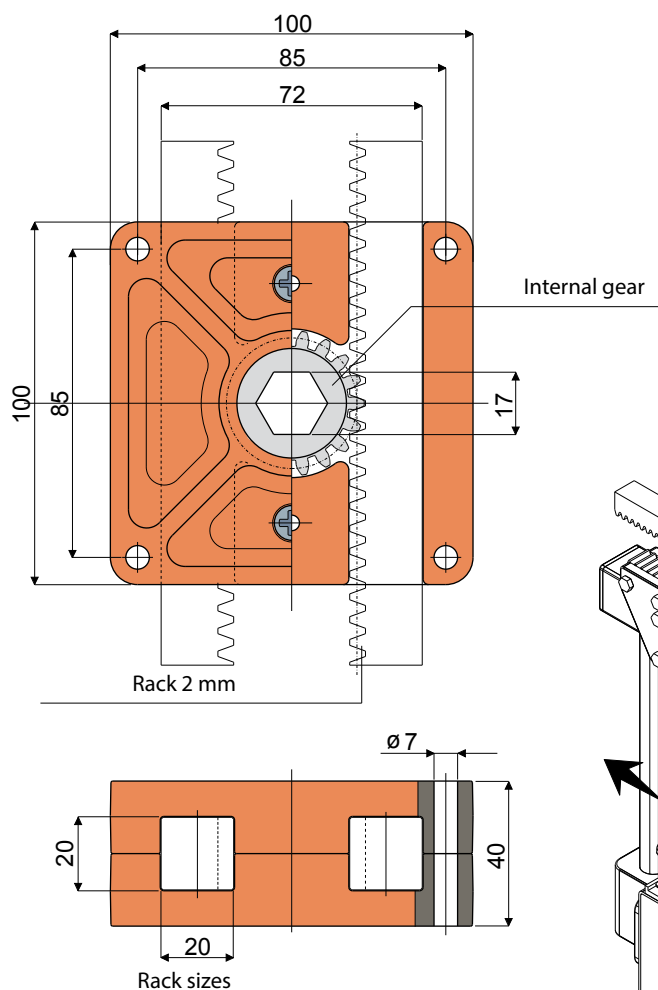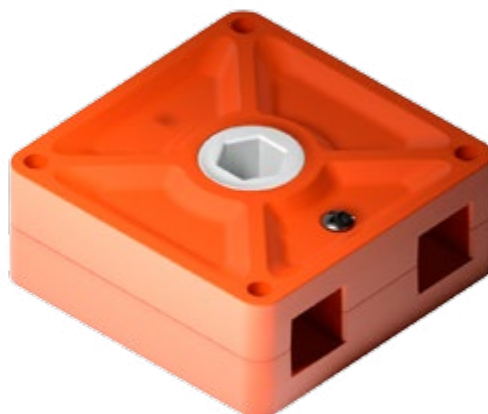

Example of application

Internal gear made of acetal		Internal gear made of brass		Without internal gear	
Type	Code	Type	Code	Type	Code
D99A	CP000541	D99B	CP000542	D99C	CP000543

MATERIALS: External body of reducer is made of reinforced polyamide orange colour; self-threading screw is made of stainless steel AISI 304. Available: without internal gear; with internal gear made of acetal, white color; with internal gear made of brass.

FEATURES: To be used for the cross adjustment of the side guides while changing the size of the conveyed product.

BOX QUANTITY: 24 pieces.

ON REQUEST:

- Reducers: In different colours.
- Box Quantity: According to your request.

SUPPORTS OF POLYAMIDE



Serie SF/C
Serie MSF/C

page 83
page 83



Serie SF/CX
Serie MSF/CX

page 84
page 84



Serie SF
Serie MSF

page 85
page 85



Serie SF/CS
Serie MSF/CS

page 86
page 86



Serie UCF/CA

page 87



Serie SF/CXA

page 88



Serie SFL/C

page 89



Serie SFL/CX

page 90



SerieSFL

page 91



Serie SFL/CS

page 92



Serie MSFL/C

page 93



Serie MSFL/CX

page 94



Serie MSFL

page 95



Serie SFB/C

page 96



Serie SFB/CX

page 97




Serie SFB

page 98




SUPPORT FEET AND THREADED BUSHINGS



Wrench 25		Ø 40		Ø 25		Ø 40	
							
PF 1/PFX 1 page 100		PF 2/PFX 2 page 100		PF 3/PFX 3 page 100		PF 4/PFX 4 page 101	
Ø 60		60x95		Ø 80		Ø 102	
							
PS 1 page 101		PS 2 page 102		PS 3 page 102		PS 4 page 102	
Ø 40		Ø 50		Ø 60		60x95	
							
PS 5/PSX 5 page 103		PS 6/PSX 6 page 103		PS 7/PSX 7 page 104		PS 8/PSX 8 page 105	
Ø 124		Ø 124		Ø 50		Ø 102	
							
PS 11 page 108		PS 12 page 109		PO 1 page 110		PO 2 page 110	
Ø 124		Ø 80		Ø 113		Ø 113	
							
PO 4 page 112		PO5 page 113		PO6 page 113		PO 7/POX 7 page 114	
Ø 102		Ø 124		Ø 75		Ø 75	
							
PO 10/POX 10 page 115		PO 11/POX 11 page 116		PO 12 page 116		PO 13 page 117	
Ø 120		Ø 120		Ø 95			
							
PO 16 page 118		PO 17 page 119		PO 18 page 119		TP1 page 120	
sizes in inches		sizes in inches					
							
TP 4 page 125		TP 5 page 126					

Fixed feet (comoulded) wrench 25 Type: PF1

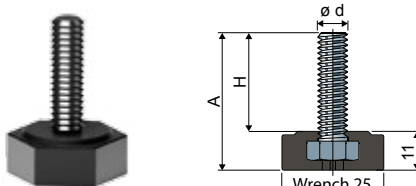

ø d	A (mm)	H (mm)	Spindle in zinc plated steel		Max static load (N)
			Type	Code	
M8	38	27	PF1	CP000708	6000


Base material: Reinforced polyamide black colour.

Box quantity: 24 pieces.

On request


- Bases: In reinforced polypropylene • other colours.
- Rod: In stainless steel AISI 304.
- Box quantity: Not standard.

Washers UNI 6592-69 - Box quantity: 24 pieces.




ø d mm	8,4
Smm	1,6
ø A mm	17
Zinc plated steel codes	7636

Nuts UNI 5588-65 - Box quantity: 24 pieces.



ø d	M8
Smm	6,5
Ch. mm	13
Zinc plated steel codes	7634

Fixed feet (comoulded) ø 40 Type: PF2

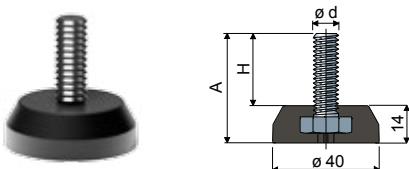

ø d	A (mm)	H (mm)	Spindle in zinc plated steel		Max static load (N)
			Type	Code	
M10	40	26	PF2	CP000709	7000


Base material: Reinforced polyamide black colour.

Box quantity: 24 pieces.

On request


- Bases: In reinforced polypropylene • other colours.
- Rod: In stainless steel AISI 304.
- Box quantity: Not standard.

Washers UNI 6592-69 - Box quantity: 24 pieces.




ø d mm	10,5
Smm	2
ø A mm	21
Zinc plated steel codes	7283

Nuts UNI 5588-65 - Box quantity: 24 pieces.



ø d	M10
Smm	8
Ch. mm	17
Zinc plated steel codes	7269

Fixed feet (base in reinforced polyamide) ø 25 Type: PF3 e PFX3

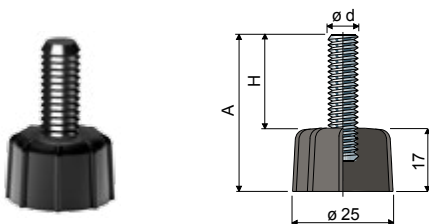

ø d	A (mm)	H (mm)	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
			Type	Code	Type	Code	
M8	40	23	PF3A	CP000710	PFX3A	CP000715	4000
	50	33	PF3B	CP000711	PFX3B	CP000716	
M10	40	23	PF3C	CP000712	PFX3C	CP000717	5000
	50	33	PF3D	CP000713	PFX3D	CP000718	
M12	75	58	PF3E	CP000714	PFX3E	CP000719	6000


Base material: Reinforced polyamide black colour.

Box quantity: 24 pieces.

On request


- Bases: In reinforced polypropylene • other colours.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.

Washers UNI 6592-69 - Box quantity: 24 pieces.




ø d mm	8,4	10,5	13
Smm	1,6	2	2,5
ø A mm	17	21	24
Zinc plated steel codes	7636	7283	7284
Stainless steel codes	7637	7286	7287

Nuts UNI 5588-65 - Box quantity: 24 pieces.



ø d	M8	M10	M12
Smm	6,5	8	10
Ch. mm	13	17	19
Zinc plated steel codes	7634	7269	7270
Stainless steel codes	7635	7272	7273

Fixed feet (base in reinforced polyamide) ø 40 Type: PF4 e PFX4

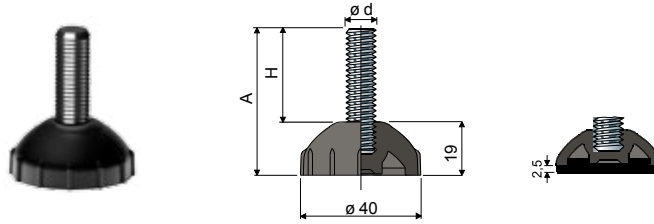

ød	A (mm)	H (mm)	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
			Type	Code	Type	Code	
M8	40	21	PF4A	CP000720	PFX4A	CP000725	4000
	50	31	PF4B	CP000721	PFX4B	CP000726	
M10	40	21	PF4C	CP000722	PFX4C	CP000727	5000
	50	31	PF4D	CP000723	PFX4D	CP000728	
M12	75	56	PF4E	CP000724	PFX4E	CP000729	6000

Base material: Reinforced polyamide black colour.

Box quantity: 24 pieces.

Accessories


Anti-slip pads:

- code: 7263;

- material: soft PVC 68 shore black colour;


- box quantity: 24 pieces.

Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	8,4	10,5	13
Smm	1,6	2	2,5
ø A mm	17	21	24
Zinc plated steel codes	7636	7283	7284
Stainless steel codes	7637	7286	7287

Nuts UNI 5588-65 - Box quantity: 24 pieces.



ø d	M8	M10	M12
Smm	6,5	8	10
Ch. mm	13	17	19
Zinc plated steel codes	7634	7269	7270
Stainless steel codes	7635	7272	7273

On request

- Bases: In reinforced polypropylene • other colours.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.

Articulated feet (in reinforced polyamide) ø 60 Type: PS1



ød	A (mm)	H (mm)	Wrench (mm)	Spindle and base in reinforced polyamide		Max static load (N)
				Type	Code	
M16	101	67	24	PS1A	CP000730	7000
M20	174	140	24	PS1B	CP000731	7500

Material base and spindle: Reinforced polyamide black colour.

Box quantity: 24 pieces.

Accessories


Anti-slip pads:

- code: 7265;

- material: soft PVC 68 shore black colour;


- box quantity: 24 pieces.

Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	17	21
Smm	3	3
ø A mm	30	37
Zinc plated steel codes	7289	7290
Stainless steel codes	7291	7292

Nuts UNI 5588-65 - Box quantity: 24 pieces.




ø d	M16	M20
Smm	13	16
Ch. mm	24	30
Zinc plated steel codes	7275	7276
Stainless steel codes	7277	7278

On request

- Bases: In reinforced polypropylene • other colours.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.

Articulated feet (in reinforced polyamide) 60 x 95 Type: PS 2

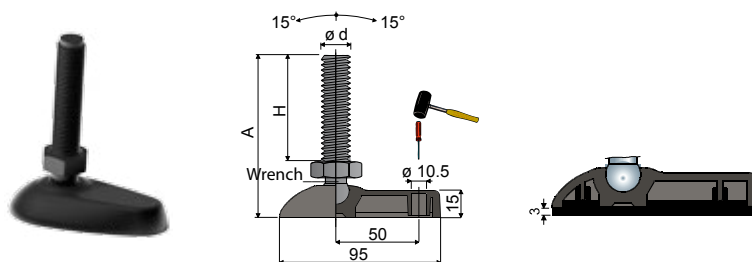


Accessories

Anti-slip pads:

- code: 7632;
- material: soft PVC 68 shore black colour;
- box quantity: 24 pieces.

$\varnothing d$	A (mm)	H (mm)	Wrench (mm)	Spindle and base in reinforced polyamide		Max static load (N)
M16	101	67	24	PS2A	CP000732	7000
M20	174	140	24	PS2B	CP000733	7500

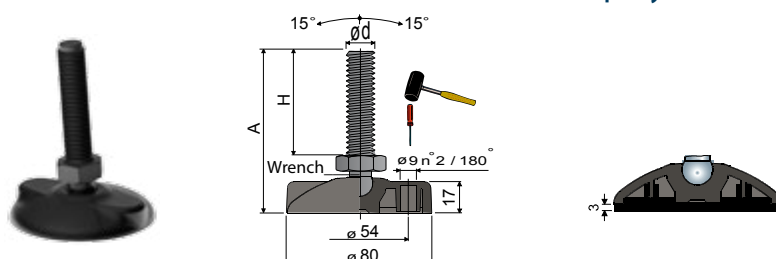
Articulated feet (in reinforced polyamide) $\varnothing 80$ Type: PS 3

Accessories

Anti-slip pads:

- code: 7266;
- material: soft PVC 68 shore black colour;
- box quantity: 24 pieces.

$\varnothing d$	A (mm)	H (mm)	Wrench (mm)	Spindle and base in reinforced polyamide		Max static load (N)
M16	104	67	24	PS3A	CP000734	7000
M20	177	140	24	PS3B	CP000735	7500

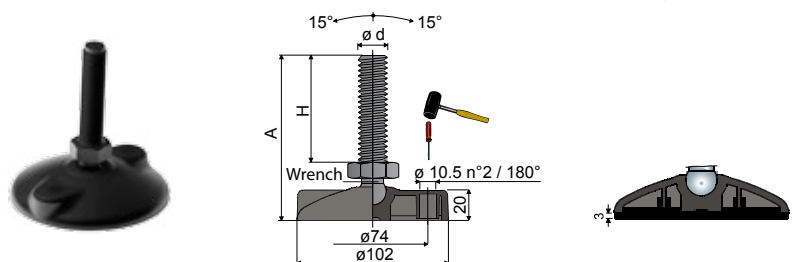Articulated feet (in reinforced polyamide) $\varnothing 102$ Type: PS 4

Accessories

Anti-slip pads:

- code: 7267;
- material: soft PVC 68 shore black colour;
- box quantity: 24 pieces.

$\varnothing d$	A (mm)	H (mm)	Wrench (mm)	Spindle and base in reinforced polyamide		Max static load (N)
M16	107	67	24	PS4A	CP000736	7000
M20	180	140	24	PS4B	CP000737	7500

Material base and spindle: Reinforced polyamide black colour.

Box quantity: 24 pieces.

On request

- Bases: In reinforced polypropylene • other colours.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.


Washers UNI 6592-69 - Box quantity: 24 pieces.

$\varnothing d$ mm	17	21
S mm	3	3
$\varnothing A$ mm	30	37
Zinc plated steel codes	7289	7290
Stainless steel codes	7291	7292

Nuts UNI 5588-65 - Box quantity: 24 pieces.

$\varnothing d$	M16	M20
S mm	13	16
Ch. mm	24	30
Zinc plated steel codes	7275	7276
Stainless steel codes	7277	7278


Articulated feet (base in reinforced polyamide) ø 40 Type: PS 5 e PSX 5



Accessories
Anti-slip pads:
- code: 7263;
- material: soft PVC 68 shore
black colour;
- box quantity: 24 pieces.

Spindle measures in mm and inches				Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
ød	A	H	Wrench	Type	Code	Type	Code	
M8	68	45	6	PS5A	CP000738	PSX5A	CP000753	10000
	88	65	6	PS5B	CP000739	PSX5B	CP000754	
	130	107	6	PS5C	CP000740	PSX5C	CP000755	
M10	60	35	8	PS5D	CP000741	PSX5D	CP000756	11000
	95	70	8	PS5E	CP000742	PSX5E	CP000757	
	140	115	8	PS5F	CP000743	PSX5F	CP000758	
M12	70	43	10	PS5G	CP000744	PSX5G	CP000759	12000
	90	63	10	PS5H	CP000745	PSX5H	CP000760	
	105	77	10	PS5I	CP000746	PSX5I	CP000761	
M14	120	93	10	PS5L	CP000747	PSX5L	CP000762	13000
	150	123	10	PS5M	CP000748	PSX5M	CP000763	
	90	61	12	PS5N	CP000749	PSX5N	CP000764	
1/2"-13 UNC	120	91	12	PS5O	CP000750	PSX5O	CP000765	12000
	145	116	12	PS5P	CP000751	PSX5P	CP000766	
	5,08	4	7/16"	PS5Q	CP000752	PSX5Q	CP000767	

Articulated feet (base in reinforced polyamide) ø 50 Type: PS 6 e PSX 6



Accessories
Anti-slip pads:
- code: 7264;
- material: soft PVC 68 shore
black colour;
- box quantity: 24 pieces.


Spindle measures in mm and inches				Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
ød	A	H	Wrench	Type	Code	Type	Code	
M8	68	45	6	PS6A	CP000768	PSX6A	CP000783	11000
	88	65	6	PS6B	CP000769	PSX6B	CP000784	
	130	107	6	PS6C	CP000770	PSX6C	CP000785	
M10	60	35	8	PS6D	CP000771	PSX6D	CP000786	12000
	95	70	8	PS6E	CP000772	PSX6E	CP000787	
	140	115	8	PS6F	CP000773	PSX6F	CP000788	
M12	70	43	10	PS6G	CP000774	PSX6G	CP000789	13000
	90	63	10	PS6H	CP000775	PSX6H	CP000790	
	105	77	10	PS6I	CP000776	PSX6I	CP000791	
M14	120	93	10	PS6L	CP000777	PSX6L	CP000792	14000
	150	123	10	PS6M	CP000778	PSX6M	CP000793	
	90	61	12	PS6N	CP000779	PSX6N	CP000794	
1/2"-13 UNC	120	91	12	PS6O	CP000780	PSX6O	CP000795	12000
	145	116	12	PS6P	CP000781	PSX6P	CP000796	
	5,1	4	7/16"	PS6Q	CP000782	PSX6Q	CP000797	

Base material: Reinforced polyamide black colour.
Box quantity: 24 pieces.

On request


- Bases: In reinforced polypropylene • other colours.
- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard. • Assembling of: Anti-slip pads • nuts • washers.

Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	8,4	10,5	13	15
S mm	1,6	2	2,5	2,5
ø A mm	17	21	24	28
Zinc plated steel codes	7636	7283	7284	7285
Stainless steel codes	7637	7286	7287	7288

Nuts UNI 5588-65 - Box quantity: 24 pieces.



ø d	M8	M10	M12	M14
S mm	6,5	8	10	11
Ch. mm	13	17	19	22
Zinc plated steel codes	7634	7269	7270	7271
Stainless steel codes	7635	7272	7273	7274

Articulated feet (base in reinforced polyamide) ø60 Type: PS 7 e PSX 7



Spindle measures in mm								
ød	A	H	Wrench	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load
				Type	Code	Type	Code	(N)
M8	72	45	6	PS7A	CP000798	PSX7A	CP000826	12000
	92	65	6	PS7B	CP000799	PSX7B	CP000827	
	134	107	6	PS7C	CP000800	PSX7C	CP000828	
M10	64	35	8	PS7D	CP000801	PSX7D	CP000829	13000
	99	70	8	PS7E	CP000802	PSX7E	CP000830	
	144	115	8	PS7F	CP000803	PSX7F	CP000831	
M12	74	43	10	PS7G	CP000804	PSX7G	CP000832	14000
	94	63	10	PS7H	CP000805	PSX7H	CP000833	
	109	77	10	PS7I	CP000806	PSX7I	CP000834	
	124	93	10	PS7L	CP000807	PSX7L	CP000835	
	154	123	10	PS7M	CP000808	PSX7M	CP000836	
M14	94	61	12	PS7N	CP000809	PSX7N	CP000837	15000
	124	91	12	PS7O	CP000810	PSX7O	CP000838	
	149	116	12	PS7P	CP000811	PSX7P	CP000839	
M16	95	60	13	PS7Q	CP000812	PSX7Q	CP000840	17000
	125	90	13	PS7R	CP000813	PSX7R	CP000841	
	140	105	13	PS7S	CP000814	PSX7S	CP000842	
	160	125	13	PS7T	CP000815	PSX7T	CP000843	
	190	155	13	PS7U	CP000816	PSX7U	CP000844	
	200	165	13	PS7V	CP000817	PSX7V	CP000845	
M20	240	205	13	PS7Z	CP000818	PSX7Z	CP000846	19000
	125	86	17	PS7W	CP000819	PSX7W	CP000847	
	155	116	17	PS7X	CP000820	PSX7X	CP000848	
	180	141	17	PS7Y	CP000821	PSX7Y	CP000849	
	245	206	17	PS7J	CP000822	PSX7J	CP000850	

Spindle measures in inches								
ød	A	H	Wrench	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load
				Type	Code	Type	Code	(N)
1/2"-13 UNC	5,24	4	7/16"	PS7α	CP000823	PSX7α	CP000851	14000
5/8"-11 UNC	8,36	7	1/2"	PS7β	CP000824	PSX7β	CP000852	17000
3/4"-10 UNC	8,43	7	5/8"	PS7γ	CP000825	PSX7γ	CP000853	19000

Base material: Reinforced polyamide black colour.

Box quantity: 24 pieces.

Accessories

Anti-slip pads:

- code: 7265;

- material: soft PVC 68 shore black colour;

- box quantity: 24 pieces.

Washers UNI 6592-69 - Box quantity: 24 pieces.

ø d mm	8,4	10,5	13	15	17	21
Smm	1,6	2	2,5	2,5	3	3
ø A mm	17	21	24	28	30	37
Zinc plated steel codes	7636	7283	7284	7285	7289	7290
Stainless steel codes	7637	7286	7287	7288	7291	7292


Nuts UNI 5588-65 - Box quantity: 24 pieces.

ø d	M8	M10	M12	M14	M16	M20
Smm	6,5	8	10	11	13	16
Ch. mm	13	17	19	22	24	30
Zinc plated steel codes	7634	7269	7270	7271	7275	7276
Stainless steel codes	7635	7272	7273	7274	7277	7278

On request

- Bases: In reinforced polypropylene • other colours.
- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.

Articulated feet (base in reinforced polyamide) 60x95 Type: PS 8 e PSX 8

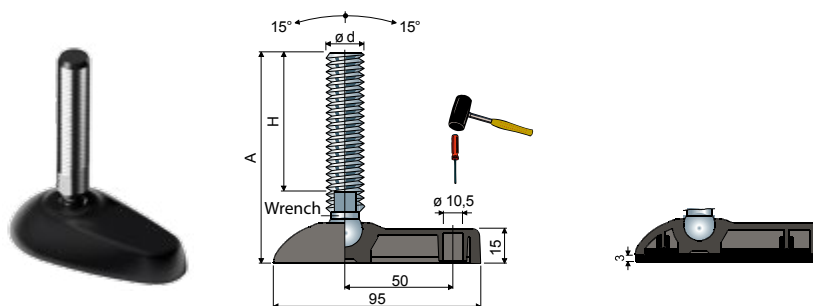

Spindle measures in mm				Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
ød	A	H	Wrench	Type	Code	Type	Code	
M8	72	45	6	PS8A	CP000854	PSX7A	CP000882	12000
	92	65	6	P8B	CP000855	PSX8B	CP000883	
	134	107	6	PS8C	CP000856	PSX8C	CP000884	
M10	64	35	8	PS8D	CP000857	PSX8D	CP000885	13000
	99	70	8	PS8E	CP000858	PSX8E	CP000886	
	144	115	8	PS8F	CP000859	PSX8F	CP000887	
M12	74	43	10	PS8G	CP000860	PSX8G	CP000888	14000
	94	63	10	PS8H	CP000861	PSX8H	CP000889	
	109	77	10	PS8I	CP000862	PSX8I	CP000890	
	124	93	10	PS8L	CP000863	PSX8L	CP000891	
	154	123	10	PS8M	CP000864	PSX8M	CP000892	
M14	94	61	12	PS8N	CP000865	PSX8N	CP000893	15000
	124	91	12	PS8O	CP000866	PSX8O	CP000894	
	149	116	12	PS8P	CP000867	PSX8P	CP000895	
M16	95	60	13	PS8Q	CP000868	PSX8Q	CP000896	17000
	125	90	13	PS8R	CP000869	PSX8R	CP000897	
	140	105	13	PS8S	CP000870	PSX8S	CP000898	
	160	125	13	PS8T	CP000871	PSX8T	CP000899	
	190	155	13	PS8U	CP000872	PSX8U	CP000900	
	200	165	13	PS8V	CP000873	PSX8V	CP000901	
	240	205	13	PS8Z	CP000874	PSX8Z	CP000902	
M20	125	86	17	PS8W	CP000875	PSX8W	CP000903	19000
	155	116	17	PS8X	CP000876	PSX8X	CP000904	
	180	141	17	PS8Y	CP000877	PSX8Y	CP000905	
	245	206	17	PS8J	CP000878	PSX8J	CP000906	

Spindle measures in inches				Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
ød	A	H	Wrench	Type	Code	Type	Code	
1/2"-13 UNC	5,24	4	7/16"	PS8α	CP000879	PSX8α	CP000907	14000
5/8"-11 UNC	8,38	7	1/2"	PS8β	CP000880	PSX8β	CP000908	17000
3/4"-10 UNC	8,47	7	5/8"	PS8γ	CP000881	PSX8γ	CP000909	19000

Base material: Reinforced polyamide black colour.

Box quantity: 24 pieces.

Accessories

Anti-slip pads:

- code: 7632;
- material: soft PVC 68 shore black colour;
- box quantity: 24 pieces.

Washers UNI 6592-69 - Box quantity: 24 pieces.

ød mm	8,4	10,5	13	15	17	21
Smm	1,6	2	2,5	2,5	3	3
øA mm	17	21	24	28	30	37
Zinc plated steel codes	7636	7283	7284	7285	7289	7290
Stainless steel codes	7637	7286	7287	7288	7291	7292


Nuts UNI 5588-65 - Box quantity: 24 pieces.

ød	M8	M10	M12	M14	M16	M20
Smm	6,5	8	10	11	13	16
Ch. mm	13	17	19	22	24	30
Zinc plated steel codes	7634	7269	7270	7271	7275	7276
Stainless steel codes	7635	7272	7273	7274	7277	7278

On request

- Bases: In reinforced polypropylene • other colours • with prebored fixing holes.
- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.

Articulated feet (base in reinforced polyamide) ø 80 Type: PS 9



Spindle measures in mm				Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
ø d	A	H	Wrench	Type	Code	Type	Code	
M8	74	45	6	PS9A	CP000910	PSX9A	CP000943	12000
	94	65	6	PS9B	CP000911	PSX9B	CP000944	
	136	107	6	PS9C	CP000912	PSX9C	CP000945	
M10	66	35	8	PS9D	CP000913	PSX9D	CP000946	14000
	101	70	8	PS9E	CP000914	PSX9E	CP000947	
	146	115	8	PS9F	CP000915	PSX9F	CP000948	
M12	76	43	10	PS9G	CP000916	PSX9G	CP000949	15000
	96	63	10	PS9H	CP000917	PSX9H	CP000950	
	111	77	10	PS9I	CP000918	PSX9I	CP000951	
	126	93	10	PS9L	CP000919	PSX9L	CP000952	
M14	156	123	10	PS9M	CP000920	PSX9M	CP000953	16000
	96	61	12	PS9N	CP000921	PSX9N	CP000954	
	126	91	12	PS9O	CP000922	PSX9O	CP000955	
M16	151	116	12	PS9P	CP000923	PSX9P	CP000956	19000
	97	60	13	PS9Q	CP000924	PSX9Q	CP000957	
	127	90	13	PS9R	CP000925	PSX9R	CP000958	
	142	105	13	PS9S	CP000926	PSX9S	CP000959	
	162	125	13	PS9L	CP000927	PSX9L	CP000960	
	192	155	13	PS9U	CP000928	PSX9U	CP000961	
M20	202	165	13	PS9V	CP000929	PSX9V	CP000962	21000
	242	205	13	PS9Z	CP000930	PSX9Z	CP000963	
	127	86	17	PS9W	CP000931	PSX9W	CP000964	
	157	116	17	PS9X	CP000932	PSX9X	CP000965	
M24	182	141	17	PS9Y	CP000933	PSX9Y	CP000966	23000
	247	206	17	PS9J	CP000934	PSX9J	CP000967	
	137	96	19	PS9K	CP000935	PSX9K	CP000968	
M24	163	122	19	PS9α	CP000936	PSX9α	CP000969	23000
	193	152	19	PS9β	CP000937	PSX9β	CP000970	
	223	182	19	PS9γ	CP000938	PSX9γ	CP000971	
	341	300	19	PS9δ	CP000939	PSX9δ	CP000972	

Spindle measures in inches				Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
ø d	A	H	Wrench	Type	Code	Type	Code	
1/2"-13 UNC	5,20	4	7/16"	PS9ε	CP000940	PSX9ε	CP000973	15000
5/8"-11 UNC	8,32	7	1/2"	PS9η	CP000841	PSX9η	CP000974	19000
3/4"-10 UNC	8,41	7	5/8"	PS9θ	CP000942	PSX9θ	CP000975	21000


Base material: Reinforced polyamide black colour.
Box quantity: 24 pieces.

Accessories

Anti-slip pads:


- code: 7266;
- material: soft PVC 68 shore black colour;
- box quantity: 24 pieces.

Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	8,4	10,5	13	15	17	21	25
Smm	1,6	2	2,5	2,5	3	3	4
ø A mm	17	21	24	28	30	37	44
Zinc plated steel codes	7636	7283	7284	7285	7289	7290	7293
Stainless steel codes	7637	7286	7287	7288	7291	7292	7294

Nuts UNI 5588-65 - Box quantity: 24 pieces.




ø d	M8	M10	M12	M14	M16	M20	M24
Smm	6,5	8	10	11	13	16	19
Ch. mm	13	17	19	22	24	30	36
Zinc plated steel codes	7634	7269	7270	7271	7275	7276	7279
Stainless steel codes	7635	7272	7273	7274	7277	7278	7280

On request

- Bases: In reinforced polypropylene • other colours • with prebored fixing holes.
- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.

Articulated feet (base in reinforced polyamide) ø 102 Type: PS 10

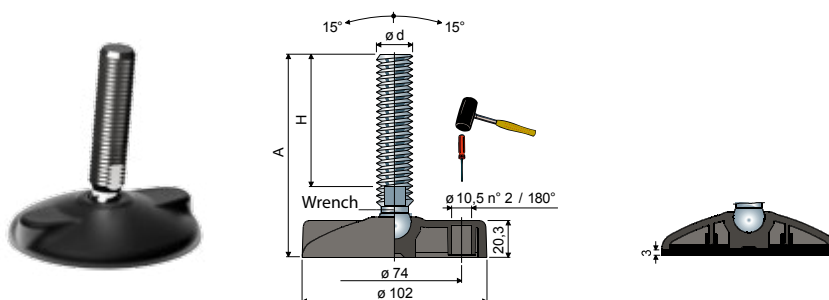

Spindle measures in mm								
ød	A	H	Wrench	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
				Type	Code	Type	Code	
M12	79	43	10	PS10A	CP000976	PSX10A	CP001003	15000
	99	63	10	PS10B	CP000977	PSX10B	CP001004	
	114	78	10	PS10C	CP000978	PSX10C	CP001005	
	129	93	10	PS10D	CP000979	PSX10D	CP001006	
	159	123	10	PS10E	CP000980	PSX10E	CP001007	
M14	99	61	12	PS10F	CP000981	PSX10F	CP001008	18000
	129	91	12	PS10G	CP000982	PSX10G	CP001009	
	154	116	12	PS10H	CP000983	PSX10H	CP001010	
M16	100	60	13	PS10I	CP000984	PSX10I	CP001011	22000
	130	90	13	PS10L	CP000985	PSX10L	CP001012	
	145	105	13	PS10M	CP000986	PSX10M	CP001013	
	165	125	13	PS10N	CP000987	PSX10N	CP001014	
	195	155	13	PS10O	CP000988	PSX10O	CP001015	
	205	165	13	PS10P	CP000989	PSX10P	CP001016	
	245	205	13	PS10Q	CP000990	PSX10Q	CP001017	
M20	130	86	17	PS10R	CP000991	PSX10R	CP001018	24000
	160	116	17	PS10S	CP000992	PSX10S	CP001019	
	185	141	17	PS10T	CP000993	PSX10T	CP001020	
	250	206	17	PS10U	CP000994	PSX10U	CP001021	
M24	140	96	19	PS10V	CP000995	PSX10V	CP001022	26000
	166	122	19	PS10Z	CP000996	PSX10Z	CP001023	
	196	152	19	PS10W	CP000997	PSX10W	CP001024	
	226	182	19	PS10X	CP000998	PSX10X	CP001025	
	344	300	19	PS10Y	CP000999	PSX10Y	CP001026	

Spindle measures in inches								
ød	A	H	Wrench	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
				Type	Code	Type	Code	
1/2"-13 UNC	5,44	4	7/16"	PS10J	CP001000	PSX10J	CP001027	15000
5/8"-11 UNC	8,57	7	1/2"	PS10K	CP001001	PSX10K	CP001028	22000
3/4"-10 UNC	8,65	7	5/8"	PS10α	CP001002	PSX10α	CP001029	24000

Base material: Reinforced polyamide black colour.

Box quantity: 24 pieces.

Accessories


Anti-slip pads:

- code: 7267;

- material: soft PVC 68 shore black colour;


- box quantity: 24 pieces.

Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	13	15	17	21	25
S mm	2,5	2,5	3	3	4
ø A mm	24	28	30	37	44
Zinc plated steel codes	7284	7285	7289	7290	7293
Stainless steel codes	7287	7288	7291	7292	7294

Nuts UNI 5588-65 - Box quantity: 24 pieces.




ø d	M12	M14	M16	M20	M24
S mm	10	11	13	16	19
Ch. mm	19	22	24	30	36
Zinc plated steel codes	7270	7271	7275	7276	7279
Stainless steel codes	7273	7274	7277	7278	7280

On request

- Bases: In reinforced polypropylene • other colours • with prebored fixing holes.
- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.

Articulated feet (base in reinforced polyamide) ø 124 Type: PS 11

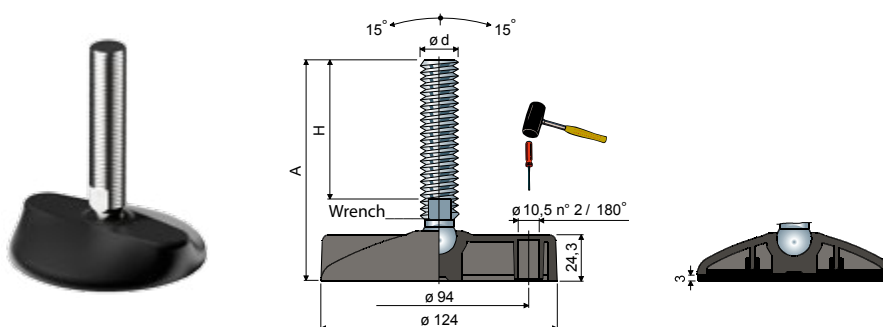

Spindle measures in mm

ød	A	H	Wrench	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
				Type	Code	Type	Code	
M14	103	61	12	PS11A	CP001030	PSX11A	CP001051	18000
	133	91	12	PS11B	CP001031	PSX11B	CP001052	
	158	116	12	PS11C	CP001032	PSX11C	CP001053	
M16	104	60	13	PS11D	CP001033	PSX11D	CP001054	25000
	134	90	13	PS11E	CP001034	PSX11E	CP001055	
	149	105	13	PS11F	CP001035	PSX11F	CP001056	
	169	125	13	PS11G	CP001036	PSX11G	CP001057	
	199	155	13	PS11H	CP001037	PSX11H	CP001058	
	209	165	13	PS11I	CP001038	PSX11I	CP001059	
	249	205	13	PS11L	CP001039	PSX11L	CP001060	
M20	134	86	17	PS11M	CP001040	PSX11M	CP001061	27000
	164	116	17	PS11N	CP001041	PSX11N	CP001062	
	189	141	17	PS11O	CP001042	PSX11O	CP001063	
	254	206	17	PS11P	CP001043	PSX11P	CP001064	
M24	144	96	19	PS11Q	CP001044	PSX11Q	CP001065	29000
	170	122	19	PS11R	CP001045	PSX11R	CP001066	
	200	152	19	PS11S	CP001046	PSX11S	CP001067	
	230	182	19	PS11T	CP001047	PSX11T	CP001068	
	348	300	19	PS11U	CP001048	PSX11U	CP001069	

Spindle measures in inches

ød	A	H	Wrench	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
				Type	Code	Type	Code	
5/8"-11 UNC	8,75	7	1/2"	PS11V	CP001049	PSX11V	CP001070	25000
3/4"-10 UNC	8,82	7	5/8"	PS11Z	CP001050	PSX11Z	CP001071	27000

Base material: Reinforced polyamide black colour.

Box quantity: 8 pieces.

Accessories


Anti-slip pads:

- code: 7268;

- material: soft PVC 68 shore black colour;


- box quantity: 8 pieces.

Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	17	21	25	31
Smm	3	3	4	4
ø A mm	30	37	44	56
Zinc plated steel codes	7289	7290	7293	7295
Stainless steel codes	7291	7292	7294	7296

Nuts UNI 5588-65 - Box quantity: 24 pieces.




ø d	M16	M20	M24	M30
Smm	13	16	19	24
Ch. mm	24	30	36	46
Zinc plated steel codes	7275	7276	7279	7281
Stainless steel codes	7277	7278	7280	7282

On request

- Bases: In reinforced polypropylene • other colours • with prebored fixing holes.
- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.

Articulated feet (base in reinforced polyamide) ø 124 Type: PS 12 e PSX 12

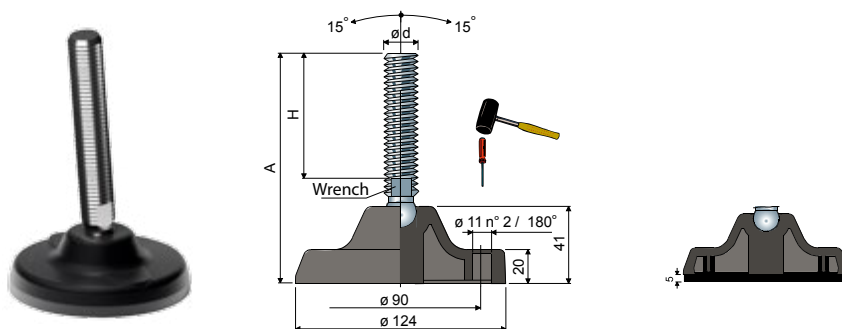

Spindle measures in mm				Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
ød	A	H	Wrench	Type	Code	Type	Code	
M16	120	60	13	PS12A	CP001072	PSX12A	CP001090	25000
	150	90	13	PS12B	CP001073	PSX12B	CP001091	
	165	105	13	PS12C	CP001074	PSX12C	CP001092	
	185	125	13	PS12D	CP001075	PSX12D	CP001093	
	215	155	13	PS12E	CP001076	PSX12E	CP001094	
	225	165	13	PS12F	CP001077	PSX12F	CP001095	
M20	265	205	13	PS12G	CP001078	PSX12G	CP001096	27000
	149	86	17	PS12H	CP001079	PSX12H	CP001097	
	179	116	17	PS12I	CP001080	PSX12I	CP001098	
	204	141	17	PS12L	CP001081	PSX12L	CP001099	
	269	206	17	PS12M	CP001082	PSX12M	CP001100	
M24	159	96	19	PS12N	CP001083	PSX12N	CP001101	29000
	185	122	19	PS12O	CP001084	PSX12O	CP001102	
	215	152	19	PS12P	CP001085	PSX12P	CP001103	
	245	182	19	PS12Q	CP001086	PSX12Q	CP001104	
	363	300	19	PS12R	CP001087	PSX12R	CP001105	

Spindle measures in inches				Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
ød	A	H	Wrench	Type	Code	Type	Code	
5/8"-11 UNC	9,29	7	1/2"	PS12S	CP001088	PSX12S	CP001106	25000
3/4"-10 UNC	9,37	7	5/8"	PS12T	CP001089	PSX12T	CP001107	27000

Base material: Reinforced polyamide black colour.

Box quantity: 8 pieces.


Accessories

Anti-slip pads:


- code: 7633;

- material: soft PVC 68 shore black colour;

- box quantity: 8 pieces.




Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	17	21	25
Smm	3	3	4
ø A mm	30	37	44
Zinc plated steel codes	7289	7290	7293
Stainless steel codes	7291	7292	7294

Nuts UNI 5588-65 - Box quantity: 24 pieces.



ø d	M16	M20	M24
Smm	13	16	19
Ch. mm	24	30	36
Zinc plated steel codes	7275	7276	7279
Stainless steel codes	7277	7278	7280

Spacers:

- code: 83410 (see pag. 210);



- material: Reinforced polyamide black colour;

- box quantity: 8 pieces.

On request

- Bases: In reinforced polypropylene • other colours • with prebored fixing holes.
- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.

Adjustable Feet (base in reinforced polyamide) ø 50 Type: PO 1 e POX 1



Accessories

Anti-slip pads:

- code: 7264;
- material: soft PVC 68 shore black colour;
- box quantity: 24 pieces.

ø d	A (mm)	H (mm)	Wrench (mm)	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
				Type	Code	Type	Code	
M10	60	40	17	PO1A	CP001108	POX1A	CP001112	12000
	65	45	17	PO1B	CP001109	POX1B	CP001113	
	90	70	17	PO1C	CP001110	POX1C	CP001114	
	120	100	17	PO1D	CP001111	POX1D	CP001115	


Base material: Reinforced polyamide black colour.

Box quantity: 24 pieces.

On request


- Bases: In reinforced polypropylene • other colours.
- Spindles with: Threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.

Washers UNI 6592-69 - Box quantity: 24 pieces.




ø d mm	10,5
S mm	2
ø A mm	21
Zinc plated steel codes	7283
Stainless steel codes	7286

Nuts UNI 5588-65 - Box quantity: 24 pieces.



ø d	M10
S mm	8
Ch. mm	17
Zinc plated steel codes	7269
Stainless steel codes	7272

Articulated feet (base in reinforced polyamide) ø 102 Type: PO 2 e POX 2

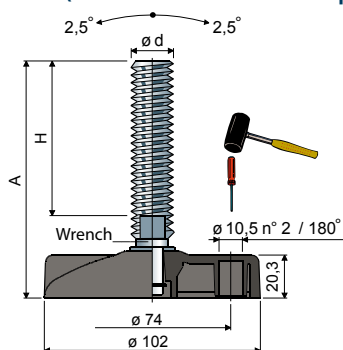

Accessories

Anti-slip pads:


- code: 7267;
- material: soft PVC 68 shore black colour;
- box quantity: 24 pieces.

ø d	A (mm)	H (mm)	Wrench (mm)	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
				Type	Code	Type	Code	
M16	98	58	13	PO2A	CP001116	POX2A	CP001130	33000
	159	119	13	PO2B	CP001117	POX2B	CP001131	
	185	145	13	PO2C	CP001118	POX2C	CP001132	
	241	201	13	PO2D	CP001119	POX2D	CP001133	
M18	197	157	15	PO2E	CP001120	POX2E	CP001134	35000
	150	107	17	PO2F	CP001121	POX2F	CP001135	
M20	178	135	17	PO2G	CP001122	POX2G	CP001136	
	200	157	17	PO2H	CP001123	POX2H	CP001137	
	233	190	17	PO2I	CP001124	POX2I	CP001138	
	281	238	17	PO2L	CP001125	POX2L	CP001139	
M24	136	90	19	PO2M	CP001126	POX2M	CP001140	37000
	173	127	19	PO2N	CP001127	POX2N	CP001141	
	208	162	19	PO2O	CP001128	POX2O	CP001142	
	248	202	19	PO2P	CP001129	POX2P	CP001143	

Base material: Reinforced polyamide black colour.


Box quantity: 24 pieces.

Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	17	21	25
S mm	3	3	4
ø A mm	30	37	44
Zinc plated steel codes	7289	7290	7293
Stainless steel codes	7291	7292	7294

Nuts UNI 5588-65 - Box quantity: 24 pieces.




ø d	M16	M20	M24
S mm	13	16	19
Ch. mm	24	30	36
Zinc plated steel codes	7275	7276	7279
Stainless steel codes	7277	7278	7280

On request

- Bases: In reinforced polypropylene • other colours • with prebored fixing holes.
- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.

Articulated feet (base in reinforced polyamide) ø 124 Type: PO 3 e POX 3

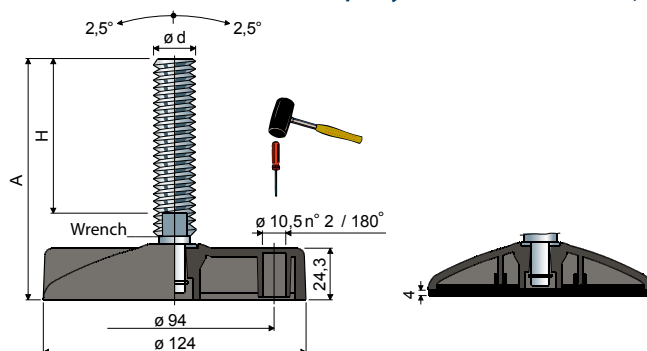


Accessories
Anti-slip pads:
- code: 7268;
- material: soft PVC 68 shore black colour;
- box quantity: 8 pieces.

ød	A	H	Wrench	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load
	(mm)	(mm)	(mm)	Type	Code	Type	Code	(N)
M16	100	58	13	PO3A	CP001144	POX3A	CP001160	43000
	161	119	13	PO3B	CP001145	POX3B	CP001161	
	187	145	13	PO3C	CP001146	POX3C	CP001162	
	243	201	13	PO3D	CP001147	POX3D	CP001163	
M18	199	157	15	PO3E	CP001148	POX3E	CP001164	45000
	152	107	17	PO3F	CP001149	POX3F	CP001165	
	180	135	17	PO3G	CP001150	POX3G	CP001166	
M20	202	157	17	PO3H	CP001151	POX3H	CP001167	47000
	235	190	17	PO3I	CP001152	POX3I	CP001168	
	283	238	17	PO3L	CP001153	POX3L	CP001169	
	138	90	19	PO3M	CP001154	POX3M	CP001170	
M24	175	127	19	PO3N	CP001155	POX3N	CP001171	50000
	210	162	19	PO3O	CP001156	POX3O	CP001172	
	250	202	19	PO3P	CP001157	POX3P	CP001173	
M30	173	125	24	PO3Q	CP001158	POX3P	CP001174	50000
	233	185	24	PO3R	CP001159	POX3P	CP001175	

Base material: Reinforced polyamide black colour.


Box quantity: 8 pieces.

Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	17	21	25	31
S mm	3	3	4	4
ø A mm	30	37	44	56
Zinc plated steel codes	7289	7290	7293	7295
Stainless steel codes	7291	7292	7294	7296

Nuts UNI 5588-65 - Box quantity: 24 pieces.






ø d	M16	M20	M24	M30
S mm	13	16	19	24
Ch. mm	24	30	36	46
Zinc plated steel codes	7275	7276	7279	7281
Stainless steel codes	7277	7278	7280	7282



On request

- Bases: In reinforced polypropylene • other colours • with prebored fixing holes.
- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.

Spacer (for PS 12, PO 4) Type: DT 1



Type	Code
DT1	CP001176



Example of application

MATERIALS: Spacer in reinforced polyamide black colour.

FEATURES: To be used with footplates part. 92 and 93 to increase the height of the footplates.


It is possible to assemble the anti-slip code 7633.

BOX QUANTITY: 8 pieces.

ON REQUEST:

- Box Quantity: According to your request.

Articulated feet (base in reinforced polyamide) ø 124 Type: PO 4 e POX 4

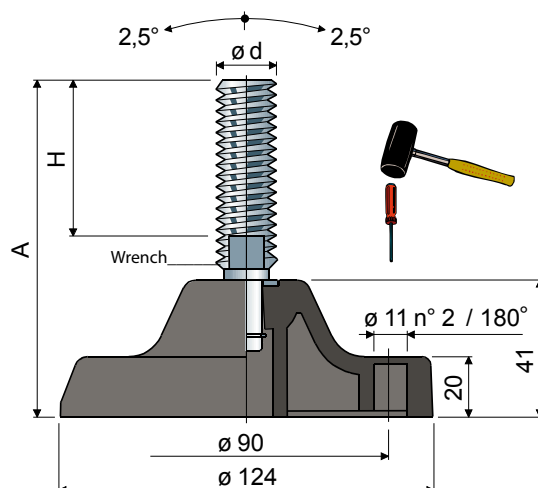

ø d	A	H	Wrench	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
	(mm)	(mm)	(mm)	Type	Code	Type	Code	
M16	115	58	13	PO4A	CP001177	POX4A	CP001193	43000
	176	119	13	PO4B	CP001178	POX4B	CP001194	
	202	145	13	PO4C	CP001179	POX4C	CP001195	
	258	201	13	PO4D	CP001180	POX4D	CP001196	
M18	214	157	15	PO4E	CP001181	POX4E	CP001197	
	167	107	17	PO4F	CP001182	POX4F	CP001198	
	195	135	17	PO4G	CP001183	POX4G	CP001199	
M20	217	157	17	PO4H	CP001184	POX4H	CP001200	45000
	250	190	17	PO4I	CP001185	POX4I	CP001201	
	298	238	17	PO4L	CP001186	POX4L	CP001202	
	153	90	19	PO4M	CP001187	POX4M	CP001203	
M24	190	127	19	PO4N	CP001188	POX4N	CP001204	47000
	225	162	19	PO4O	CP001189	POX4O	CP001205	
	265	202	19	PO4P	CP001190	POX4P	CP001206	
	188	125	24	PO4Q	CP001191	POX4Q	CP001207	
M30	248	185	24	PO4R	CP001192	POX4R	CP001208	50000

Base material: Reinforced polyamide black colour.

Box quantity: 8 pieces.

Accessories

Anti-slip pads:


- code: 7633;

- material: soft PVC 68 shore black colour;

- box quantity: 8 pieces.




Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	17	21	25	31
S mm	3	3	4	4
ø A mm	30	37	44	56
Zinc plated steel codes	7289	7290	7293	7295
Stainless steel codes	7291	7292	7294	7296

Nuts UNI 5588-65 - Box quantity: 24 pieces.




ø d	M16	M20	M24	M30
S mm	13	16	19	24
Ch. mm	24	30	36	46
Zinc plated steel codes	7275	7276	7279	7281
Stainless steel codes	7277	7278	7280	7282

Spacers:

- code: 83410 (see pag. 210);

- material: Reinforced polyamide black colour;


- box quantity: 8 pieces.



On request

- Bases: In reinforced polypropylene • other colours • with prebored fixing holes.
- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Anti-slip pads • nuts • washers.

Adjustable feet (base in steel) ø 80 Type: PO5

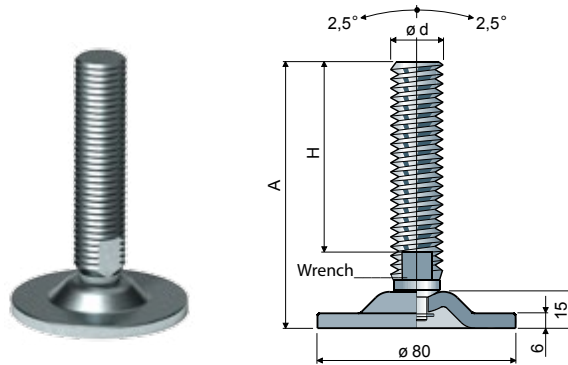

ød	A	H	Wrench	Spindle in zinc plated steel		Max static load (N)
	(mm)	(mm)	(mm)	Type	Code	
M20	120	87	17	PO5A	CP001209	40000
M24	120	85	19	PO5A	CP001210	

Material: Base and spindle in zinc-plated steel.
Box quantity: 8 pieces.

Washers UNI 6592-69 - Box quantity: 24 pieces.

ø d mm	21	25
S mm	3	4
ø A mm	37	44
Zinc plated steel codes	7290	7293


Nuts UNI 5588-65 - Box quantity: 24 pieces.

ø d	M20	M24
S mm	16	19
Ch. mm	30	36
Zinc plated steel codes	7276	7279

On request

- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.

Adjustable feet (base in steel) ø 113 Type: PO 6 e POX 6

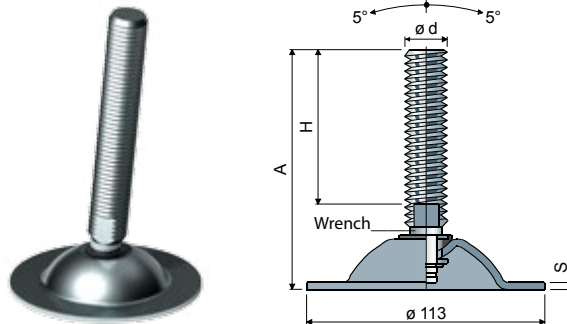

ød	A	H	Wrench	Spindle, base in zinc plated steel		Spindle, base in stainless steel AISI 304		Max static load (N)
	(mm)	(mm)	(mm)	Type	Code	Type	Code	
M16	100	58	13	PO6A	CP001211	POX6A	CP001227	15000 (zinc plated) S = 3,5
	161	119	13	PO6B	CP001212	POX6B	CP001228	
	187	145	13	PO6C	CP001213	POX6C	CP001229	
	243	201	13	PO6D	CP001214	POX6D	CP001230	
M18	199	157	15	PO6E	CP001215	POX6E	CP001231	
	152	107	17	PO6F	CP001216	POX6F	CP001232	
	180	135	17	PO6G	CP001217	POX6G	CP001233	
M20	202	157	17	PO6H	CP001218	POX6H	CP001234	10000 (AISI 304) S = 3
	235	190	17	PO6I	CP001219	POX6I	CP001235	
	283	238	17	PO6L	CP001220	POX6L	CP001236	
	138	90	19	PO6M	CP001221	POX6M	CP001237	
M24	175	127	19	PO6N	CP001222	POX6N	CP001238	
	210	162	19	PO6O	CP001223	POX6O	CP001239	
	250	202	19	PO6P	CP001224	POX6P	CP001240	
M30	173	125	24	PO6Q	CP001225	POX6Q	CP001241	
	233	185	24	PO6R	CP001226	POX6R	CP001242	

Washers UNI 6592-69 - Box quantity: 24 pieces.

ø d mm	17	21	25	31
S mm	3	3	4	4
ø A mm	30	37	44	56
Zinc plated steel codes	7289	7290	7293	7295
Stainless steel codes	7291	7292	7294	7296


Nuts UNI 5588-65 - Box quantity: 24 pieces.

ø d	M16	M20	M24	M30
S mm	13	16	19	24
Ch. mm	24	30	36	46
Zinc plated steel codes	7275	7276	7279	7281
Stainless steel codes	7277	7278	7280	7282


Box quantity: 8 pieces.

On request

- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.

Adjustable feet (base in steel) $\varnothing 113$ Type: PO 7 e POX 7

$\varnothing d$	A	H	Wrench	Spindle, base in zinc plated steel		Spindle, base in stainless steel AISI 304		Max static load
	(mm)	(mm)	(mm)	Type	Code	Type	Code	(N)
M16	100	58	13	PO7A	CP001243	POX7A	CP001259	15000 (zinc plated) $S = 3,5$
	161	119	13	PO7B	CP001244	POX7B	CP001260	
	187	145	13	PO7C	CP001245	POX7C	CP001261	
	243	201	13	PO7D	CP001246	POX7D	CP001262	
M18	199	157	15	PO7E	CP001247	POX7E	CP001263	
	152	107	17	PO7F	CP001248	POX7F	CP001264	
	180	135	17	PO7G	CP001249	POX7G	CP001265	
M20	202	157	17	PO7H	CP001250	POX7H	CP001266	10000 (AISI 304) $S = 3$
	235	190	17	PO7I	CP001251	POX7I	CP001267	
	283	238	17	PO7L	CP001252	POX7L	CP001268	
	138	90	19	PO7M	CP001253	POX7M	CP001269	
M24	175	127	19	PO7N	CP001254	POX7N	CP001270	
	210	162	19	PO7O	CP001255	POX7O	CP001271	
	250	202	19	PO7P	CP001256	POX7P	CP001272	
	173	125	24	PO7Q	CP001257	POX7Q	CP001273	
M30	233	185	24	PO7R	CP001258	POX7R	CP001274	

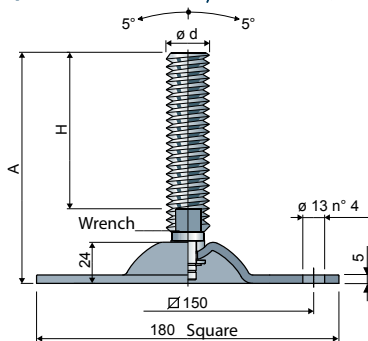
Adjustable feet (base in zinc plated steel) $\square 180$ Type: PO 8

$\varnothing d$	A	H	Wrench	Spindle and base in zinc plated steel		Max static load
	(mm)	(mm)	(mm)	Type	Code	(N)
M16	100	57	13	PO8A	CP001275	45000
	161	118	13	PO8B	CP001276	
	187	144	13	PO8C	CP001277	
	243	200	13	PO8D	CP001278	
M18	199	157	15	PO8E	CP001279	46000
	152	107	17	PO8F	CP001280	
	181	136	17	PO8G	CP001281	
	202	157	17	PO8H	CP001282	
M20	235	190	17	PO8I	CP001283	47000
	283	238	17	PO8L	CP001284	
	138	90	19	PO8M	CP001285	
	175	127	19	PO8N	CP001286	
M24	210	162	19	PO8O	CP001287	48000
	250	202	19	PO8P	CP001288	
	173	125	24	PO8Q	CP001289	
	233	185	24	PO8R	CP001290	

On request

- Spindles with: Sunk hexagon head
- second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.


Washers UNI 6592-69 - Box quantity: 24 pieces.



$\varnothing d$ mm	17	21	25	31
Smm	3	3	4	4
$\varnothing A$ mm	30	37	44	56
Zinc plated steel codes	7289	7290	7293	7295
Stainless steel codes	7291	7292	7294	7296


Box quantity: 8 pieces.

Nuts UNI 5588-65 - Box quantity: 24 pieces.




$\varnothing d$	M16	M20	M24	M30
Smm	13	16	19	24
Ch. mm	24	30	36	46
Zinc plated steel codes	7275	7276	7279	7281
Stainless steel codes	7277	7278	7280	7282

Adjustable feet (base in nickel plated steel) ø 80 Type: PO 9 e POX 9

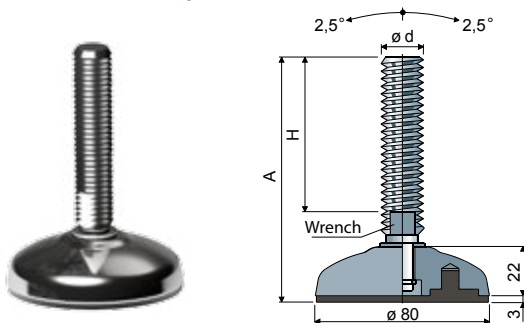

ød	A (mm)	H (mm)	Wrench (mm)	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
				Type	Code	Type	Code	
M16	101	58	13	PO9A	CP001291	POX9A	CP001305	46000
	162	119	13	PO9B	CP001292	POX9B	CP001306	
	188	145	13	PO9C	CP001293	POX9C	CP001307	
	244	201	13	PO9D	CP001294	POX9D	CP001308	
M18	200	157	15	PO9E	CP001295	POX9E	CP001309	47000
	153	107	17	PO9F	CP001296	POX9F	CP001310	
	181	135	17	PO9G	CP001297	POX9G	CP001311	
M20	203	157	17	PO9H	CP001298	POX9H	CP001312	47000
	236	190	17	PO9I	CP001299	POX9I	CP001313	
	284	238	17	PO9L	CP001300	POX9L	CP001314	
	139	90	19	PO9M	CP001301	POX9M	CP001315	
M24	176	127	19	PO9N	CP001302	POX9N	CP001316	48000
	211	162	19	PO9O	CP000303	POX9O	CP001317	
	250	202	19	PO9P	CP001304	POX9P	CP001318	

Adjustable feet (base in nickel plated steel) ø 102 Type: PO 10 e POX 10

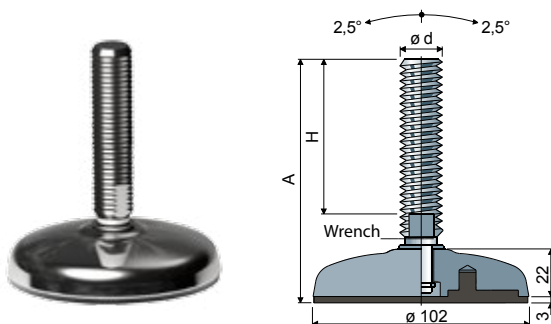

ød	A (mm)	H (mm)	Wrench (mm)	Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
				Type	Code	Type	Code	
M16	101	58	13	PO10A	CP001319	POX10A	CP001333	50000
	162	119	13	PO10B	CP001320	POX10B	CP001334	
	188	145	13	PO10C	CP001321	POX10C	CP001335	
	244	201	13	PO10D	CP001322	POX10D	CP001336	
M18	200	157	15	PO10E	CP001323	POX10E	CP001337	51000
	153	107	17	PO10F	CP001324	POX10F	CP001338	
	181	135	17	PO10G	CP001325	POX10G	CP001339	
M20	203	157	17	PO10H	CP001326	POX10H	CP001340	52000
	236	190	17	PO10I	CP001327	POX10I	CP001341	
	284	238	17	PO10L	CP001328	POX10L	CP001342	
	139	90	19	PO10M	CP001329	POX10M	CP001343	
M24	176	127	19	PO10N	CP001330	POX10n	CP001344	52000
	211	162	19	PO10O	CP000331	POX10O	CP001345	
	250	202	19	PO10P	CP001332	POX10P	CP001346	

Base material: Nickel plated steel.


Box quantity: 8 pieces.

Features: The feet are complete with anti-slip pad made out of soft PVC 68 shore black colour .

On request


- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat
- threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.

Washers UNI 6592-69 - Box quantity: 24 pieces.




ø d mm	17	21	25
Smm	3	3	4
ø A mm	30	37	44
Zinc plated steel codes	7289	7290	7293
Stainless steel codes	7291	7292	7294

Nuts UNI 5588-65 - Box quantity: 24 pieces.




ø d	M16	M20	M24
Smm	13	16	19
Ch. mm	24	30	36
Zinc plated steel codes	7275	7276	7279
Stainless steel codes	7277	7278	7280

Adjustable feet (base in nickel plated steel) ø 124 Type: PO 11 e POX 11




Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	17	21	25	31
Smm	3	3	4	4
ø A mm	30	37	44	56
Zinc plated steel codes	7289	7290	7293	7295
Stainless steel codes	7291	7292	7294	7296

Nuts UNI 5588-65 - Box quantity: 24 pieces.



ø d	M16	M20	M24	M30
Smm	13	16	19	24
Ch. mm	24	30	36	46
Zinc plated steel codes	7275	7276	7279	7281
Stainless steel codes	7277	7278	7280	7282

ø d	A H			Spindle in zinc plated steel		Spindle in stainless steel AISI 304		Max static load (N)
	(mm)	(mm)	(mm)	Type	Code	Type	Code	
M16	104	58	13	PO11A	CP001347	POX11A	CP001363	55000
	165	119	13	PO11A	CP001348	POX11A	CP001364	
	191	145	13	PO11A	CP001349	POX11A	CP001365	
	247	201	13	PO11A	CP001350	POX11A	CP001366	
M18	203	157	15	PO11A	CP001351	POX11A	CP001367	56000
M20	156	107	17	PO11A	CP001352	POX11A	CP001368	
	184	135	17	PO11A	CP001353	POX11A	CP001369	
	206	157	17	PO11A	CP001354	POX11A	CP001370	
M24	239	190	17	PO11A	CP001355	POX11A	CP001371	57000
	287	238	17	PO11A	CP001356	POX11A	CP001372	
	142	90	19	PO11A	CP001357	POX11A	CP001373	
	179	127	19	PO11A	CP001358	POX11A	CP001374	
M30	214	162	19	PO11A	CP001359	POX11A	CP001375	58000
	254	202	19	PO11A	CP001360	POX11A	CP001376	
	177	125	24	PO11A	CP001361	POX11A	CP001377	
	237	185	24	PO11A	CP001362	POX11A	CP001378	

Base material: Nickel plated steel.


Box quantity: 8 pieces.

Features: The feet are complete with anti-slip pad made out of soft PVC 68 shore black colour .


On request

- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.

Articulated feet (base in stainless steel) ø 75 Type: PO 12

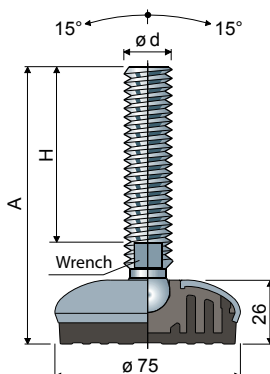


Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	17	21	25
Smm	3	3	4
ø A mm	30	37	44
Stainless steel codes	7291	7292	7294

Nuts UNI 5588-65 - Box quantity: 24 pieces.



ø d	M16	M20	M24
Smm	13	16	19
Ch. mm	24	30	36
Stainless steel codes	7277	7278	7280

Spindle measures in mm and inches						
ø d	A	H	Wrench	Spindle in stainless steel AISI 304		Max static load (N)
				Type	Code	
M16	103	60	13	PO12A	CP001379	19000
	133	90	13	PO12B	CP001380	
	148	105	13	PO12C	CP001381	
	168	125	13	PO12D	CP001382	
	198	155	13	PO12E	CP001383	
	208	165	13	PO12F	CP001384	
M20	248	205	13	PO12G	CP001385	21000
	132	86	17	PO12H	CP001386	
	162	116	17	PO12I	CP001387	
	187	141	17	PO12L	CP001388	
	252	206	17	PO12M	CP001389	
	142	96	19	PO12N	CP001390	
M24	168	122	19	PO12O	CP001391	23000
	198	152	19	PO12P	CP001392	
	228	182	19	PO12Q	CP001393	
	346	300	19	PO12R	CP001394	
5/8"-11 UNC	8.70	7	1/2"	PO12S	CP001395	19000
3/4"-10 UNC	8.78	7	5/8"	PO12T	CP001396	21000

Material: Internal part made of reinforced polyamide; external covering made of stainless steel AISI 304; anti-slip pad made of soft PVC 68 shore black colour.


Box quantity: 8 pieces.

Features: Comoulded anti-slip pad allows a perfect adherence with steel base. Consequent absence of internal cavities makes foot extremely cleanable.

On request

- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.

Adjustable feet (base in stainless steel) ø75 Type: PO 13

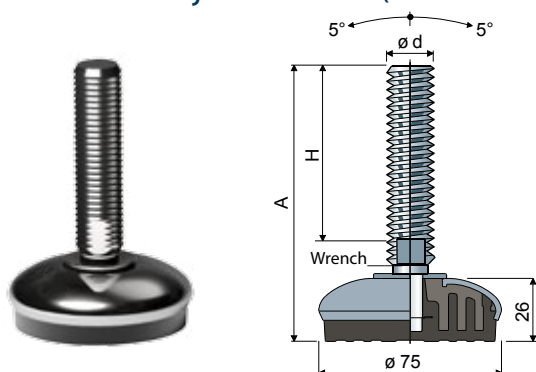

Washers UNI 6592-69 - Box quantity: 24 pieces.

ø d mm	13	15	17	21	25	31
Smm	2,5	2,5	3	3	4	4
ø A mm	24	28	30	37	44	56
Stainless steel codes	7287	7288	7291	7292	7294	7296

Nuts UNI 5588-65 - Box quantity: 24 pieces.

ø d	M12	M14	M16	M20	M24	M30
Smm	10	11	13	16	19	24
Ch. mm	19	22	24	30	36	46
Stainless steel codes	7273	7274	7277	7278	7280	7282

ød	A	H	Wrench	Spindle and base in stainless steel AISI 304		Max static load
	(mm)	(mm)	(mm)	Type	Code	(N)
M12	109	70	10	PO13A	CP001397	17000
M14	148	108	12	PO13B	CP001398	
M16	102	58	13	PO13C	CP001399	
	163	119	13	PO13D	CP001400	
	189	145	13	PO13E	CP001401	24000
	245	201	13	PO13F	CP001402	
M18	201	157	15	PO13G	CP001403	
	153	107	17	PO13H	CP001404	
M20	181	135	17	PO13I	CP001405	
	203	157	17	PO13L	CP001406	
	236	190	17	PO13M	CP001407	
	284	238	17	PO13N	CP001408	
M24	139	90	19	PO13O	CP001409	24000
	176	127	19	PO13P	CP001410	
	211	162	19	PO13Q	CP001411	
	250	201	19	PO13R	CP001412	
M30	174	125	24	PO13S	CP001413	24000
	234	185	24	PO13T	CP001414	

Material: Internal part made of reinforced polyamide; external covering made of stainless steel AISI 304; anti-slip pad made of soft PVC 68 shore black colour.


Box quantity: 8 pieces.

Features: Comoulded anti-slip pad allows a perfect adherence with steel base. Consequent absence of internal cavities makes foot extremely cleanable.

On request

- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.

Articulated feet (base in stainless steel) ø 95 Type: PO 14

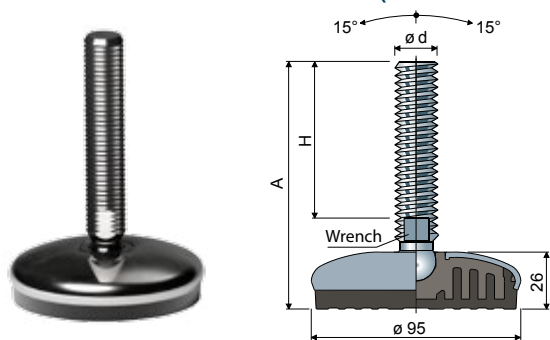

Washers UNI 6592-69 - Box quantity: 24 pieces.

ø d mm	17	21	25
Smm	3	3	4
ø A mm	30	37	44
Stainless steel codes	7291	7292	7294

Nuts UNI 5588-65 - Box quantity: 24 pieces.

ø d	M16	M20	M24
Smm	13	16	19
Ch. mm	24	30	36
Stainless steel codes	7277	7278	7280

Spindle measures in mm and inches

ød	A	H	Wrench	Spindle and base in stainless steel AISI 304		Max static load
				Type	Code	(N)
M16	103	60	13	PO14A	CP001415	22000
	133	90	13	PO14B	CP001416	
	148	105	13	PO14C	CP001417	
	168	125	13	PO14D	CP001418	
	198	155	13	PO14E	CP001419	
	208	165	13	PO14F	CP001420	
	248	205	13	PO14G	CP001421	
M20	132	86	17	PO14H	CP001422	24000
	162	116	17	PO14I	CP001423	
	187	141	17	PO14L	CP001424	
	252	206	17	PO14M	CP001425	
M24	142	96	19	PO14N	CP001422	26000
	168	122	19	PO14O	CP001427	
	198	152	19	PO14P	CP001428	
	228	182	19	PO14Q	CP001429	
	346	300	19	PO14R	CP001430	
5/8"-11 UNC	8,70	7	1/2"	PO14S	CP001431	18000
3/4"-10 UNC	8,78	7	5/2"	PO14T	CP001432	22000

Material: Internal part made of reinforced polyamide; external covering made of stainless steel AISI 304; anti-slip pad made of soft PVC 68 shore black colour.


Box quantity: 8 pieces.

Features: Comoulded anti-slip pad allows a perfect adherence with steel base. Consequent absence of internal cavities makes foot extremely cleanable.

On request

- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.

Adjustable feet (base in stainless steel) ø 95 Type: PO 15

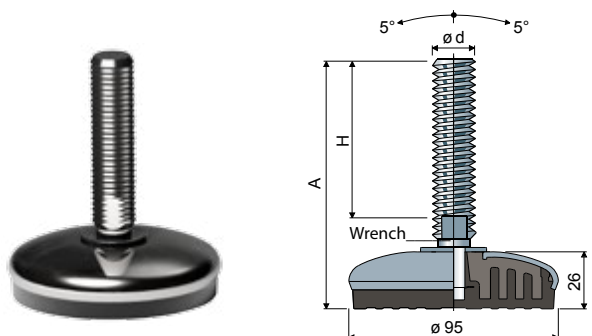

Washers UNI 6592-69 - Box quantity: 24 pieces.

ø d mm	13	15	17	21	25	31
Smm	2,5	2,5	3	3	4	4
ø A mm	24	28	30	37	44	56
Stainless steel codes	7287	7288	7291	7292	7294	7296

Nuts UNI 5588-65 - Box quantity: 24 pieces.

ø d	M12	M14	M16	M20	M24	M30
Smm	10	11	13	16	19	24
Ch. mm	19	22	24	30	36	46
Stainless steel codes	7273	7274	7277	7278	7280	7282

ø d	A (mm)	H (mm)	Wrench (mm)	Spindle and base in stainless steel AISI 304		Max static load (N)
				Type	Code	
M12	109	70	10	PO15A	CP001433	17000
M14	148	108	12	PO15B	CP001434	
	102	58	13	PO15C	CP001435	
M16	163	119	13	PO15D	CP001436	
	189	145	13	PO15E	CP001437	
	245	201	13	PO15F	CP001438	
M18	201	157	15	PO15G	CP001439	
	153	107	17	PO15H	CP001440	
	181	135	17	PO15I	CP001441	
M20	203	157	17	PO15L	CP001442	27000
	236	190	17	PO15M	CP001443	
	284	238	17	PO15N	CP001444	
	139	90	19	PO15O	CP001445	
M24	176	127	19	PO15P	CP001446	
	211	162	19	PO15Q	CP001447	
	250	201	19	PO15R	CP001448	
M30	174	125	24	PO15S	CP001449	
	234	185	24	PO13T	CP001450	

Material: Internal part made of reinforced polyamide; external covering made of stainless steel AISI 304; anti-slip pad made of soft PVC 68 shore black colour.


Box quantity: 8 pieces.

Features: Comoulded anti-slip pad allows a perfect adherence with steel base. Consequent absence of internal cavities makes foot extremely cleanable.

On request

- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.

Articulated feet (base in stainless steel) ø 120 Type: PO 16

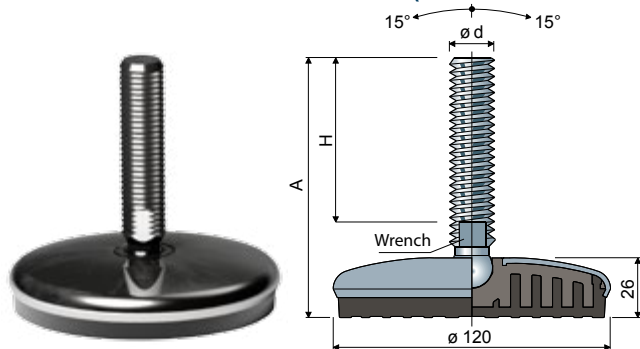

Washers UNI 6592-69 - Box quantity: 24 pieces.

ø d mm	17	21	25
Smm	3	3	4
ø A mm	30	37	44
Stainless steel codes	7291	7292	7294

Nuts UNI 5588-65 - Box quantity: 24 pieces.

ø d	M16	M20	M24
Smm	13	16	19
Ch. mm	24	30	36
Stainless steel codes	7277	7278	7280

Spindle measures in mm and inches						
ød	A	H	Wrench	Spindle and base in stainless steel AISI 304		Max static load (N)
				Type	Code	
M16	103	60	13	PO16A	CP001451	25000
	133	90	13	PO16B	CP001452	
	148	105	13	PO16C	CP001453	
	168	125	13	PO16D	CP001454	
	198	155	13	PO16E	CP001455	
	208	165	13	PO16F	CP001456	
	248	205	13	PO16G	CP001457	
M20	132	86	17	PO16H	CP001458	27000
	162	116	17	PO16I	CP001459	
	187	141	17	PO16L	CP001460	
	252	206	17	PO16M	CP001461	
M24	142	96	19	PO15N	CP001462	29000
	168	122	19	PO16O	CP001463	
	198	152	19	PO16P	CP001464	
	228	182	19	PO16Q	CP001465	
	346	300	19	PO16R	CP001466	
5/8"-11 UNC	8,70	7	1/2"	PO16S	CP001467	25000
3/4"-10 UNC	8,78	7	5/8"	PO16T	CP001468	27000

Material: Internal part made of reinforced polyamide; external covering made of stainless steel AISI 304; anti-slip pad made of soft PVC 68 shore black colour.


Box quantity: 8 pieces.

Features: Comoulded anti-slip pad allows a perfect adherence with steel base. Consequent absence of internal cavities makes foot extremely cleanable.


On request

- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.

Adjustable feet (base in stainless steel) ø 120 Type: PO 17

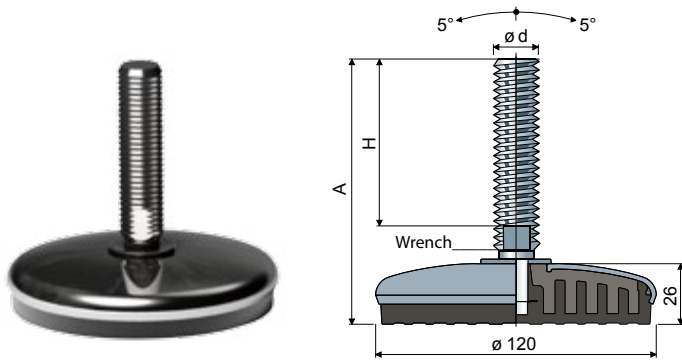


Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	13	15	17	21	25	31
Smm	2,5	2,5	3	3	4	4
ø A mm	24	28	30	37	44	56
Stainless steel codes	7287	7288	7291	7292	7294	7296

Nuts UNI 5588-65 - Box quantity: 24 pieces.



ø d	M12	M14	M16	M20	M24	M30
Smm	10	11	13	16	19	24
Ch. mm	19	22	24	30	36	46
Stainless steel codes	7273	7274	7277	7278	7280	7282

ød	A (mm)	H (mm)	Wrench (mm)	Spindle and base in stainless steel AISI 304		Max static load (N)
				Type	Code	
M12	109	70	10	PO17A	CP001469	17000
M14	148	108	12	PO17B	CP001470	
M16	102	58	13	PO17C	CP001471	
	163	119	13	PO17D	CP001472	
	189	145	13	PO17E	CP001473	
	245	201	13	PO17F	CP001474	
M18	201	157	15	PO17G	CP001475	
	153	107	17	PO17H	CP001476	
M20	181	135	17	PO17I	CP001477	
	203	157	17	PO17L	CP001478	
	236	190	17	PO17M	CP001479	
	284	238	17	PO17N	CP001480	30000
M24	139	90	19	PO17O	CP001481	
	176	127	19	PO17P	CP001482	
	211	162	19	PO17Q	CP001483	
	250	201	19	PO17R	CP001484	
M30	174	125	24	PO17S	CP001485	
	234	185	24	PO17T	CP001486	

Material: Internal part made of reinforced polyamide; external covering made of stainless steel AISI 304; anti-slip pad made of soft PVC 68 shore black colour.


Box quantity: 8 pieces.

Features: Comoulded anti-slip pad allows a perfect adherence with steel base. Consequent absence of internal cavities makes foot extremely cleanable.


On request

- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.

Adjustable feet (base in stainless steel) ø 95 Type: PO 18

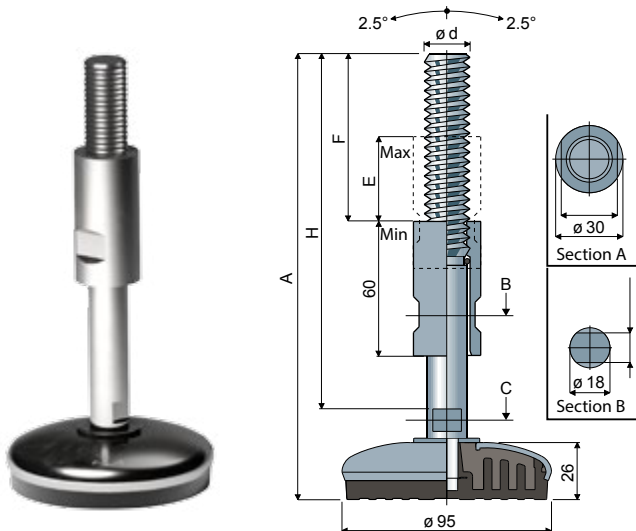


Washers UNI 6592-69 - Box quantity: 24 pieces.



ø d mm	21
Smm	3
ø A mm	37
Stainless steel codes	7292

Nuts UNI 5588-65 - Box quantity: 24 pieces.



ø d	M20
Smm	16
Ch. mm	30
Stainless steel codes	7278

ød	A (mm)	H (mm)	F (mm)	E (mm)	Wrench 1 (mm)	Wrench 2 (mm)	Spindle, base in stainless steel AISI 304		Max static load (N)
							Type	Code	
M20	200	159	73	39	25	13	PO18	CP001487	27000

Material: Internal part made of reinforced polyamide; external covering made of stainless steel AISI 304; anti-slip pad made of soft PVC 68 Shore black colour.



Box quantity: 8 pieces.

Features: Comoulded anti-slip pad allows a perfect adherence with steel base. Consequent absence of internal cavities makes foot extremely cleanable. The threaded insert guarantees the protection of the spindle thread.

On request

- Spindles with: Sunk hexagon head, second wrench seat head, hexagon wrench seat, threads with other pitches and lengths.
- Box quantity: According to your request. • Assembling of: Nuts • washers.

Threaded bushing (for rectangular tubes) Type: TP1

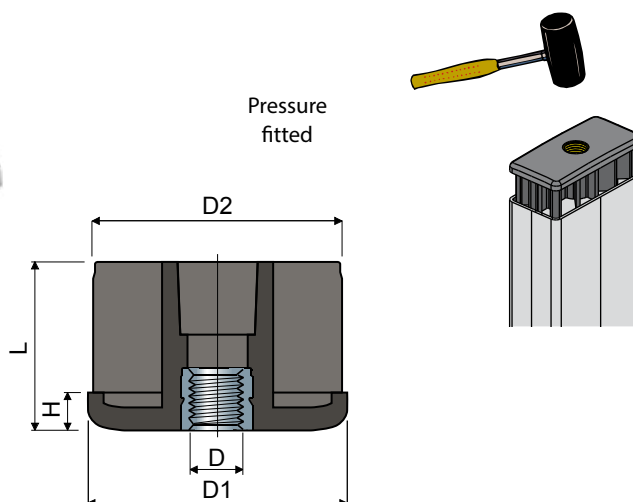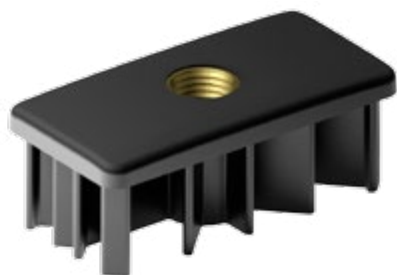

Tube dimensions								Type	Code	Max static load
Outside (mm)	Thickness (mm)	Inside (mm)	Thread D	D1 (mm)	D2 (mm)	H (mm)	L (mm)			
20x50	2	16x46	M8	20x50	16x46	5	38	TP1A	CP001488	4500
			M8	30x60	25x55	8	38	TP1B	CP001489	4500
30x60	2,5	25x55	M10	30x60	25x55	8	38	TP1C	CP001490	5000
			M12	30x60	25x55	8	38	TP1D	CP001491	5500
			M14	30x60	25x55	8	38	TP1E	CP001492	6000
			M16	30x60	25x55	8	38	TP1F	CP001493	6500
			M14	40x80	36x76	10	45	TP1G	CP001494	9000
40x80	2	36x76	M16	40x80	36x76	10	45	TP1H	CP001495	9000
			M20	40x80	36x76	10	45	TP1I	CP001496	9500
			M14	40x80	34x74	10	45	TP1L	CP001497	9000
	3	34x74	M16	40x80	34x74	10	45	TP1M	CP001498	9000
			M20	40x80	34x74	10	45	TP1N	CP001499	9500
50x100	2	46x96	M14	50x100	46x96	10	45	TP1O	CP001500	9000
			M16	50x100	46x96	10	45	TP1P	CP001501	9000
			M20	50x100	46x96	10	45	TP1Q	CP001502	9500
	3	44x94	M14	50x100	44x94	10	45	TP1R	CP001503	9000
			M16	50x100	44x94	10	45	TP1S	CP001504	9000
			M20	50x100	44x94	10	45	TP1T	CP001505	9500
50x150	3	44x144	M14	50x150	44x144	10	45	TP1U	CP001506	9000
			M16	50x150	44x144	10	45	TP1V	CP001507	9000
			M20	50x150	44x144	10	45	TP1Z	CP001508	9500
60x120	3	54x114	M14	60x120	54x114	10	45	TP1W	CP001509	9000
			M16	60x120	54x114	10	45	TP1X	CP001510	9000
			M20	60x120	54x114	10	45	TP1Y	CP001511	9500


Material: Bush in reinforced polyamide black colour; threaded insert in brass.

Box quantity: 24 pieces.

On request

- Bushes: Can be supplied with thread in inches (1/4"-20, 5/16"-18, 3/8"-16, 1/2"-13, 5/8"-11, 3/4"-10, 1"-8, ecc.); With different thicknesses and colours.
- Box quantity: According to your request.

Threaded bushings (for round tubes) Type: TP2

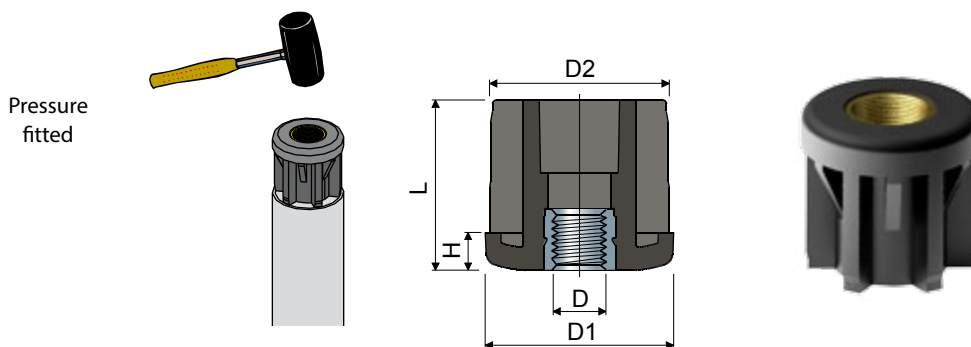

tube dimensions									Type	Code	Max static load (N)
ø Outside (mm)	(inches)	Thickness (mm)	ø Inside (mm)	Thread D	D1 (mm)	D2 (mm)	H (mm)	L (mm)			
30	-	1	28	M8	30	28	6	31	TP2A8	CP001512	4500
				M10	30	28	6	31	TP2A10	CP001513	5000
				M12	30	28	6	31	TP2A12	CP001514	5500
				M14	30	28	6	31	TP2A14	CP001515	6000
				M16	30	28	6	31	TP2A16	CP001516	6500
	-	1,5	27	M8	30	27	6	31	TP2B8	CP001517	4500
				M10	30	27	6	31	TP2B10	CP001518	5000
				M12	30	27	6	31	TP2B12	CP001519	5500
				M14	30	27	6	31	TP2B14	CP001520	6000
				M16	30	27	6	31	TP2B16	CP001521	6500
	-	2	26	M8	30	26	6	31	TP2C8	CP001522	4500
				M10	30	26	6	31	TP2C10	CP001523	5000
				M12	30	26	6	31	TP2C12	CP001524	5500
				M14	30	26	6	31	TP2C14	CP001525	6000
				M16	30	26	6	31	TP2C16	CP001526	6500
	-	2,5	25	M8	30	25	6	31	TP2D8	CP001527	4500
				M10	30	25	6	31	TP2D10	CP001528	5000
				M12	30	25	6	31	TP2D12	CP001529	5500
				M14	30	25	6	31	TP2D14	CP001530	6000
				M16	30	25	6	31	TP2D16	CP001531	6500
38	-	1,5	35	M8	38	35	8	38	TP2E8	CP001532	4500
				M10	38	35	8	38	TP2E10	CP001533	5000
				M12	38	35	8	38	TP2E12	CP001534	5500
				M14	38	35	8	38	TP2E14	CP001535	6000
				M16	38	35	8	38	TP2E16	CP001536	6500
	-	2	34	M8	38	34	8	38	TP2F8	CP001537	4500
				M10	38	34	8	38	TP2F10	CP001538	5000
				M12	38	34	8	38	TP2F12	CP001539	5500
				M14	38	34	8	38	TP2F14	CP001540	6000
				M16	38	34	8	38	TP2F16	CP001541	6500
	-	2,5	34	M8	38	34	8	38	TP2G8	CP001542	4500
				M10	38	34	8	38	TP2G10	CP001543	5000
				M12	38	34	8	38	TP2G12	CP001544	5500
				M14	38	34	8	38	TP2G14	CP001545	6000
				M16	38	34	8	38	TP2G16	CP001546	6500

Tube dimensions								Type	Code	Max static load	
ø Outside	Thickness	ø Inside	Thread	D1	D2	H	L				
(mm)	(pouces)	(mm)	(mm)	D	(mm)	(mm)	(mm)	(mm)		(N)	
48,3	11/2	1,5	45,3	M8	48,3	45,3	10	45	TP2M8	CP001565	7000
				M10	48,3	45,3	10	45	TP2M10	CP001566	7500
				M12	48,3	45,3	10	45	TP2M12	CP001567	8000
				M14	48,3	45,3	10	45	TP2M14	CP001568	8500
				M16	48,3	45,3	10	45	TP2M16	CP001569	9000
				M20	48,3	45,3	10	45	TP2M20	CP001570	9500
		2	44,3	M8	48,3	44,3	10	45	TP2N8	CP001571	7000
				M10	48,3	44,3	10	45	TP2N10	CP001572	7500
				M12	48,3	44,3	10	45	TP2N12	CP001573	8000
				M14	48,3	44,3	10	45	TP2N14	CP001574	8500
				M16	48,3	44,3	10	45	TP2N16	CP001575	9000
				M20	48,3	44,3	10	45	TP2N20	CP001576	9500
	2,5	43,3	M8	48,3	43,3	10	45	TP2O8	CP001577	7000	
			M10	48,3	43,3	10	45	TP2O10	CP001578	7500	
			M12	48,3	43,3	10	45	TP2O12	CP001579	8000	
			M14	48,3	43,3	10	45	TP2O14	CP001580	8500	
			M16	48,3	43,3	10	45	TP2O16	CP001581	9000	
			M20	48,3	43,3	10	45	TP2O20	CP001582	9500	
50	-	1,5	47	M8	50	47	10	45	TP2P8	CP001583	7000
				M10	50	47	10	45	TP2P10	CP001584	7500
				M12	50	47	10	45	TP2P12	CP001585	8000
				M14	50	47	10	45	TP2P14	CP001586	8500
				M16	50	47	10	45	TP2P16	CP001587	9000
				M20	50	47	10	45	TP2P20	CP001588	9500
	-	1,5	47,9	M8	50,9	47,9	10	45	TP2Q8	CP001589	7000
				M10	50,9	47,9	10	45	TP2Q10	CP001590	7500
				M12	50,9	47,9	10	45	TP2Q12	CP001591	8000
				M14	50,9	47,9	10	45	TP2Q14	CP001592	8500
				M16	50,9	47,9	10	45	TP2Q16	CP001593	9000
				M20	50,9	47,9	10	45	TP2Q20	CP001594	9500
50,9	-	2	46,9	M8	50,9	46,9	10	45	TP2R8	CP001595	7000
				M10	50,9	46,9	10	45	TP2R10	CP001596	7500
				M12	50,9	46,9	10	45	TP2R12	CP001597	8000
				M14	50,9	46,9	10	45	TP2R14	CP001598	8500
				M16	50,9	46,9	10	45	TP2R16	CP001599	9000
				M20	50,9	46,9	10	45	TP2R20	CP001600	9500
	-	2,5	45,9	M8	50,9	45,9	10	45	TP2S8	CP001601	7000
				M10	50,9	45,9	10	45	TP2S10	CP001602	7500
				M12	50,9	45,9	10	45	TP2S12	CP001603	8000
				M14	50,9	45,9	10	45	TP2S14	CP001604	8500
				M16	50,9	45,9	10	45	TP2S16	CP001605	9000
				M20	50,9	45,9	10	45	TP2S20	CP001606	9500
60,3	2	1,5	57,3	M8	60,3	57,3	12	52	TP2T8	CP001607	7000
				M10	60,3	57,3	12	52	TP2T10	CP001608	7500
				M12	60,3	57,3	12	52	TP2T12	CP001609	8000
				M14	60,3	57,3	12	52	TP2T14	CP001610	8500
				M16	60,3	57,3	12	52	TP2T16	CP001611	9000
				M20	60,3	57,3	12	52	TP2T20	CP001612	9500
		2	56,3	M24	60,3	57,3	12	52	TP2T24	CP001613	10000
				M8	60,3	56,3	12	52	TP2U8	CP001614	7000
				M10	60,3	56,3	12	52	TP2U10	CP001615	7500
				M12	60,3	56,3	12	52	TP2U12	CP001616	8000
				M14	60,3	56,3	12	52	TP2U14	CP001617	8500
				M16	60,3	56,3	12	52	TP2U16	CP001618	9000
	2,5	55,3	M20	60,3	56,3	12	52	TP2U20	CP001619	9500	
			M24	60,3	56,3	12	52	TP2U24	CP001620	10000	
			M8	60,3	55,3	12	52	TP2V8	CP001621	7000	
			M10	60,3	55,3	12	52	TP2V10	CP001622	7500	
			M12	60,3	55,3	12	52	TP2V12	CP001623	8000	
			M14	60,3	55,3	12	52	TP2V14	CP001624	8500	
2,5	55,3	M16	60,3	55,3	12	52	TP2V16	CP001625	9000		
		M20	60,3	55,3	12	52	TP2V20	CP001626	9500		
		M24	60,3	55,3	12	52	TP2V24	CP001627	10000		


Material: Bush in reinforced polyamide black colour; threaded insert in brass.

Box quantity: 24 pieces.

On request

- Bushes: With different thicknesses and colours.
- Box quantity: According to your request.

Threaded bushings (for square tubes) Type: TP3

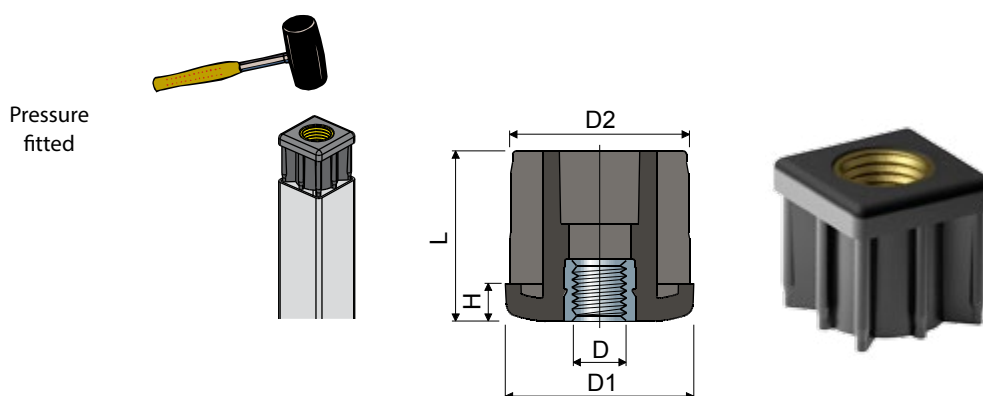

Dimensions du tube								Type	Code	Max static load (N)
Externe (mm)	Épaisseur (mm)	Interne (mm)	Filetage D	D1 (mm)	D2 (mm)	H (mm)	L (mm)			
20	1,5	17	M8	20	17	5	23	TP3A	CP001628	4500
25	1,5	22	M8	25	22	6	26	TP3B8	CP001629	4500
			M10	25	22	6	26	TP3B10	CP001630	5000
			M12	25	22	6	26	TP3B12	CP001631	5500
30	1,5	27	M8	30	27	6	31	TP3C8	CP001632	4500
			M10	30	27	6	31	TP3C10	CP001633	5000
			M12	30	27	6	31	TP3C12	CP001634	5500
			M14	30	27	6	31	TP3C14	CP001635	6000
	2	26	M16	30	27	6	31	TP3C16	CP001636	6500
			M8	30	26	6	31	TP3D8	CP001637	4500
			M10	30	26	6	31	TP3D10	CP001638	5000
			M12	30	26	6	31	TP3D12	CP001639	5500
35	1,5	32	M14	30	26	6	31	TP3D14	CP001640	6000
			M16	30	26	6	31	TP3D16	CP001641	6500
			M8	35	32	8	38	TP3E8	CP001642	6500
			M10	35	32	8	38	TP3E10	CP001643	7000
			M12	35	32	8	38	TP3E12	CP001644	7500
			M14	35	32	8	38	TP3E14	CP001645	8000
	2	31	M16	35	32	8	38	TP3E16	CP001646	8500
			M20	35	32	8	38	TP3E20	CP001647	9000
			M8	35	31	8	38	TP3F8	CP001648	6500
			M10	35	31	8	38	TP3F10	CP001649	7000
			M12	35	31	8	38	TP3F12	CP001650	7500
			M14	35	31	8	38	TP3F14	CP001651	8000
40	1,2	37,6	M16	35	31	8	38	TP3F16	CP001652	8500
			M20	35	31	8	38	TP3F20	CP001653	9000
			M8	40	37,6	8	38	TP3G8	CP001654	7000
			M10	40	37,6	8	38	TP3G10	CP001655	7500
			M12	40	37,6	8	38	TP3G12	CP001656	8000
	1,5	37	M14	40	37,6	8	38	TP3G14	CP001657	8500
			M16	40	37,6	8	38	TP3G16	CP001658	9000
			M20	40	37,6	8	38	TP3G20	CP001659	9500
			M8	40	37	8	38	TP3H8	CP001660	7000
			M10	40	37	8	38	TP3H10	CP001661	7500
	2	36	M12	40	37	8	38	TP3H12	CP001662	8000
			M14	40	37	8	38	TP3H14	CP001663	8500
			M16	40	37	8	38	TP3H16	CP001664	9000
			M20	40	37	8	38	TP3H20	CP001665	9500
			M8	40	36	8	38	TP3I8	CP001666	7000
40	2,5	35	M10	40	36	8	38	TP3I10	CP001667	7500
			M12	40	36	8	38	TP3I12	CP001668	8000
			M14	40	36	8	38	TP3I14	CP001669	8500
			M16	40	36	8	38	TP3I16	CP001670	9000
			M20	40	36	8	38	TP3I20	CP001671	9500
	2,5	35	M8	40	35	8	38	TP3L8	CP001672	7000
			M10	40	35	8	38	TP3L10	CP001673	7500
			M12	40	35	8	38	TP3L12	CP001674	8000
40	2,5	35	M14	40	35	8	38	TP3L14	CP001675	8500
			M16	40	35	8	38	TP3L16	CP001676	9000
			M20	40	35	8	38	TP3L20	CP001677	9500
			M20	40	35	8	38	TP3L20	CP001677	9500

Tube dimensions								Type	Code	Max static load (N)
Outside (mm)	Thickness (mm)	Inside (mm)	Thread D	D1 (mm)	D2 (mm)	H (mm)	L (mm)			
45	2	41	M8	45	41	8	38	TP3M8	CP001678	7000
			M10	45	41	8	38	TP3M10	CP001679	7500
			M12	45	41	8	38	TP3M12	CP001680	8000
			M14	45	41	8	38	TP3M14	CP001681	8500
			M16	45	41	8	38	TP3M16	CP001682	9000
			M20	45	41	8	38	TP3M16	CP001683	9500
50	1,2	47,6	M8	50	47,6	10	45	TP3N8	CP001684	7000
			M10	50	47,6	10	45	TP3N10	CP001685	7500
			M12	50	47,6	10	45	TP3N12	CP001686	8000
			M14	50	47,6	10	45	TP3N14	CP001687	8500
			M16	50	47,6	10	45	TP3N16	CP001688	9000
			M20	50	47,6	10	45	TP3N20	CP001689	9500
	1,5	47	M8	50	47	10	45	TP3O8	CP001690	7000
			M10	50	47	10	45	TP3O10	CP001691	7500
			M12	50	47	10	45	TP3O12	CP001692	8000
			M14	50	47	10	45	TP3O14	CP001693	8500
			M16	50	47	10	45	TP3O16	CP001694	9000
			M20	50	47	10	45	TP3O20	CP001695	9500
	2	46	M8	50	46	10	45	TP3P8	CP001696	7000
			M10	50	46	10	45	TP3P10	CP001697	7500
			M12	50	46	10	45	TP3P12	CP001698	8000
			M14	50	46	10	45	TP3P14	CP001699	8500
			M16	50	46	10	45	TP3P16	CP001700	9000
			M20	50	46	10	45	TP3P20	CP001701	9500
	2,5	45	M8	50	45	10	45	TP3Q8	CP001702	7000
			M10	50	45	10	45	TP3Q10	CP001703	7500
			M12	50	45	10	45	TP3Q12	CP001704	8000
			M14	50	45	10	45	TP3Q14	CP001705	8500
			M16	50	45	10	45	TP3Q16	CP001706	9000
			M20	50	45	10	45	TP3Q20	CP001707	9500
	3	44	M8	50	44	10	45	TP3R8	CP001708	7000
			M10	50	44	10	45	TP3R10	CP001709	7500
			M12	50	44	10	45	TP3R12	CP001710	8000
			M14	50	44	10	45	TP3R14	CP001711	8500
			M16	50	44	10	45	TP3R16	CP001712	9000
			M20	50	44	10	45	TP3R20	CP001713	9500
60	2	56	M8	60	56	10	45	TP3S8	CP001714	7000
			M10	60	56	10	45	TP3S10	CP001715	7500
			M12	60	56	10	45	TP3S12	CP001716	8000
			M14	60	56	10	45	TP3S14	CP001717	8500
			M16	60	56	10	45	TP3S16	CP001718	9000
			M20	60	56	10	45	TP3S20	CP001719	9500
	3	54	M8	60	54	10	45	TP3T8	CP001720	7000
			M10	60	54	10	45	TP3T10	CP001721	7500
			M12	60	54	10	45	TP3T12	CP001722	8000
			M14	60	54	10	45	TP3T14	CP001723	8500
			M16	60	54	10	45	TP3T16	CP001724	9000
			M20	60	54	10	45	TP3T20	CP001725	9500
80	3	74	M16	80	74	10	45	TP3U16	CP001726	9000
			M20	80	74	10	45	TP3U20	CP001727	9500


Material: Bush in reinforced polyamide black colour; threaded insert in brass.

Box quantity: 24 pieces.

On request

- Bushes: With different thicknesses and colours.
- Box quantity: According to your request.

Threaded bushings (for round tubes: sizes and threads in "inches") Type: TP4

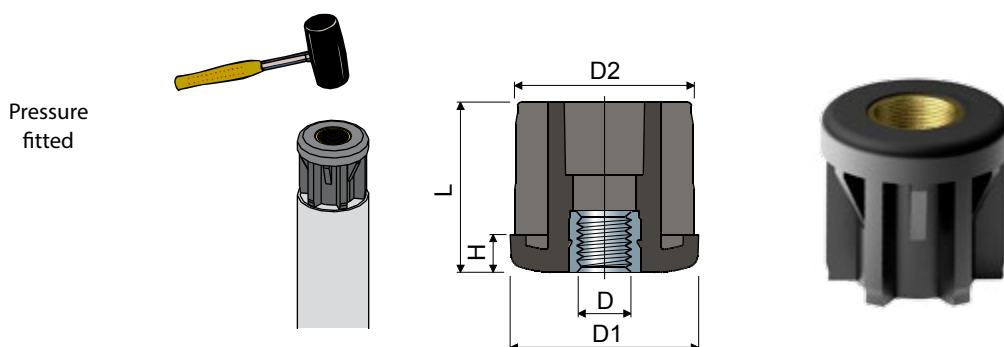

Tube dimensions											Type	Code	Max static load
ø Outside		Thickness		ø Inside	Thread D		D1	D2	H	L			
(inches)	(mm)	(inches)	(mm)	(mm)	(UNC)	(mm)	(mm)	(mm)	(mm)	(mm)			(N)
1"	(25,4)	0,083	(2,1)	21,18	1/4"-20	(6,35)	25,2	21,18	6	26	TP4A	CP001728	4500
					5/16"-18	(7,93)	25,2	21,18	6	26	TP4B	CP001729	4500
1"1/4	(31,75)	0,083	(2,1)	27,53	3/8"-16	(9,52)	31,5	27,53	6	31	TP4C	CP001730	5000
					1/2"-13	(12,7)	31,5	27,53	6	31	TP4D	CP001731	5000
					5/8"-11	(15,87)	31,5	27,53	6	31	TP4E	CP001732	6500
1"1/2	(38,1)	0,065	(1,65)	34,8	3/8"-16	(9,52)	38	34,8	8	38	TP4F	CP001733	5000
					1/2"-13	(12,7)	38	34,8	8	38	TP4G	CP001734	5000
					5/8"-11	(15,87)	38	34,8	8	38	TP4H	CP001735	6500
					3/4"-10	(19,05)	38	34,8	8	38	TP4I	CP001736	9000
					3/8"-16	(9,52)	38	33,89	8	38	TP4L	CP001737	5000
		0,083	(2,1)	33,89	1/2"-13	(12,7)	38	33,89	8	38	TP4M	CP001738	5000
					5/8"-11	(15,87)	38	33,89	8	38	TP4N	CP001739	6500
					3/4"-10	(19,05)	38	33,89	8	38	TP4O	CP001740	9000
					5/8"-11	(15,87)	44,2	38,35	8	38	TP4P	CP001741	6500
					3/4"-10	(19,05)	44,2	38,35	8	38	TP4Q	CP001742	9000
1"3/4	(44,45)	0,12	(3,04)	38,35	1"-8	(25,4)	44,2	38,35	8	38	TP4R	CP001743	10000
					3/8"-16	(9,52)	50,6	47,5	10	45	TP4S	CP001744	5000
					1/2"-13	(12,7)	50,6	47,5	10	45	TP4T	CP001745	5000
2"	(50,8)	0,065	(1,65)	47,5	5/8"-11	(15,87)	50,6	47,5	10	45	TP4U	CP001746	6500
					3/4"-10	(19,05)	50,6	47,5	10	45	TP4V	CP001747	9000
					3/8"-16	(9,52)	50,6	45,26	10	45	TP4Z	CP001748	5000
					1/2"-13	(12,7)	50,6	45,26	10	45	TP4W	CP001749	5000
					5/8"-11	(15,87)	50,6	45,26	10	45	TP4X	CP001750	6500
		0,109	(2,77)	45,26	3/4"-10	(19,05)	50,6	45,26	10	45	TP4Y	CP001751	9000
					5/8"-11	(15,87)	50,6	42,88	10	45	TP4J	CP001752	6500
					3/4"-10	(19,05)	50,6	42,88	10	45	TP4K	CP001753	9000
					1"-8	(25,4)	50,6	42,88	10	45	TP4α	CP001754	10000
					5/8"-11	(15,87)	63,3	55,58	12	52	TP4β	CP001755	6500
2"1/2	(63,5)	0,156	(3,96)	55,58	3/4"-10	(19,05)	63,3	55,58	12	53	TP4δ	CP001756	9000
					1"-8	(25,4)	63,3	55,58	12	52	TP4γ	CP001757	10000


Material: Bush in reinforced polyamide black colour; threaded insert in brass.

Box quantity: 24 pieces.

On request

- Bushes: With different thicknesses and colours.
- Box quantity: According to your request.

Threaded bushings (for square tubes: sizes and threads in "inches") Type: TP5

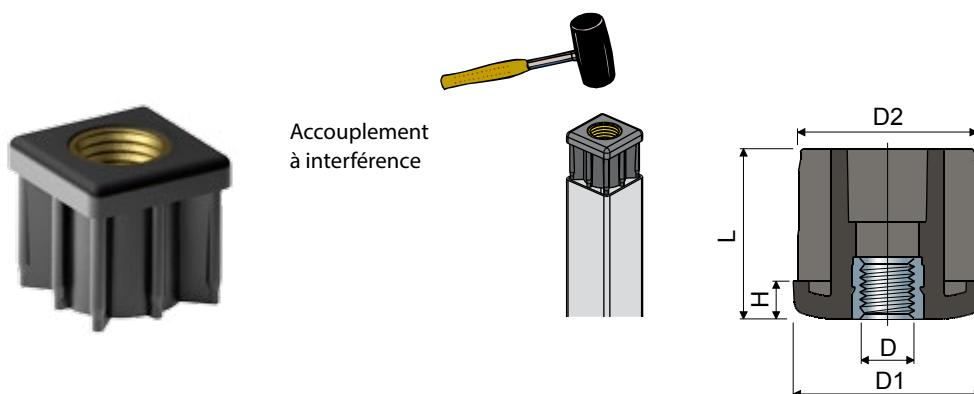

Dimensions du tube										Type	Code	Max static load (N)	
Outside (pouces)	Thickness (mm)	Thickness (pouces)	Thickness (mm)	Inside (mm)	Thread D (UNC) (mm)		D1 (mm)	D2 (mm)	H (mm)				L (mm)
1"1/2	(38,1)	0,065	(1,65)	34,8	3/8"-16	(9,52)	38	34,8	8	38	TP5A	CP001758	5000
					1/2"-13	(12,7)	38	34,8	8	38	TP5B	CP001759	5000
					5/8"-11	15,87)	38	34,8	8	38	TP5C	CP001760	6500
					3/4"-10		38	34,8	8	38	TP5D	CP001761	9000
	0,12	(3,05)	32	3/8"-16	(9,52)	38	32	8	38	TP5E	CP001762	5000	
				1/2"-13	(12,7)	38	32	8	38	TP5F	CP001763	5000	
				5/8"-11		38	32	8	38	TP5G	CP001764	6500	
				3/4"-10		38	32	8	38	TP5H	CP001765	9000	
2"	(50,8)	0,065	(1,65)	47,5	3/8"-16	(9,52)	50,6	47,5	10	45	TP5I	CP001766	5000
					1/2"-13	(12,7)	50,6	47,5	10	45	TP5L	CP001767	5000
					5/8"-11		50,6	47,5	10	45	TP5M	CP001768	6500
					3/4"-10		50,6	47,5	10	45	TP5N	CP001769	9000
	0,109	(2,77)	45,26	3/8"-16	(9,52)	50,6	45,26	10	45	TP5O	CP001770	5000	
				1/2"-13	(12,7)	50,6	45,26	10	45	TP5P	CP001771	5000	
				5/8"-11		50,6	45,26	10	45	TP5Q	CP001772	6500	
				3/4"-10		50,6	45,26	10	45	TP5R	CP001773	9000	
	0,12	(3,05)	44,7	3/8"-16	(9,52)	50,6	44,7	10	45	TP5S	CP001774	5000	
				1/2"-13	(12,7)	50,6	44,7	10	45	TP5T	CP001775	5000	
				5/8"-11		50,6	44,7	10	45	TP5U	CP001776	6500	
				3/4"-10		50,6	44,7	10	45	TP5V	CP001777	9000	

Material: Bush in reinforced polyamide black colour; threaded insert in brass.

Box quantity: 24 pieces.

On request

- Bushes: With different thicknesses and colours.
- Box quantity: According to your request.